

Low Profile 100Base SC Fiber PCIe Adapter TE100-ECFXL (v1.0R)

The Low Profile 100Base SC Fiber PCIe Adapter, model TE100-ECFXL, provides a reliable high performance connection from a PC or server to a Multi-Mode SC-type fiber connection for distances of up to 2 kilometers (1.2 miles). Compatible with low profile form factor computers with an available PCI Express slot.

Full-Duplex technology generates data rates of up to 200 Mbps. Supports Wake-on-LAN, remote wake-up, 802.1p priority encoding, and 802.1Q VLAN tagging. Compatible with Microsoft Windows 10, Windows 8, Windows 7, Windows Server 2008 and Linux operating systems.

PRODUCT OVERVIEW

- Compatible with low profile form factor computers
- 100Base SC-type Multi-Mode fiber to PCIe adapter
- Supports fiber connections for distances of up to 2 km (1.2 miles)
- Wake-on-LAN, 802.1p, and 802.1Q support
- Compatible with Windows 10, Windows 8, Windows 7, Windows Server 2008 and Linux operating systems

FEATURES

- Compatible with Low Profile computers
- 1 x 100Base-FX SC-type fiber port
- PCI Express 1.1 compliant
- IEEE 802.1Q VLAN tagging
- IEEE 802.1p Layer 2 priority tagging
- IEEE 802.3x full-duplex Flow Control
- Wake-on-LAN and remote Wake-up support
- Plug and Play
- 3-year limited warranty

Low Profile 100Base SC Fiber PCIe Adapter

TE100-ECFXL (v1.0R)




SPECIFICATIONS

HARDWARE

Standards	<ul style="list-style-type: none">• IEEE 802.3u 100Base-FX• IEEE 802.3x, IEEE 802.1Q, IEEE 802.1p
Network Media	<ul style="list-style-type: none">• Multi-mode fiber optic cable 50/125 μm up to 550 m or 62.5/125 μm up to 2 km
Interface	<ul style="list-style-type: none">• PCI Express, SC-type slot
Power Consumption	<ul style="list-style-type: none">• Max 2 watts
Diagnostic LED	<ul style="list-style-type: none">• Speed, Link / Activity
Supported OS	<ul style="list-style-type: none">• Windows 10 (32/64-bit), Windows 8 (32/64-bit), 7 (32/64-bit), Vista (32/64-bit), XP (32/64-bit)• Windows Server 2003, 2008• Linux Kernel 2.4.x / 2.6.x
Data Rate	<ul style="list-style-type: none">• 100 Mbps (half-duplex)• 200 Mbps (full-duplex)
Dimension	<ul style="list-style-type: none">• 80 x 107 x 57 mm (3 x 4.2 x 2.2 in.)
Weight	<ul style="list-style-type: none">• 40 g (1.4 oz.)
Temperature	<ul style="list-style-type: none">• Operating: 0°C ~ 50°C (32°F ~ 122°F)• Storage: -10°C ~ 70°C (14°F ~ 158°F)
Humidity	<ul style="list-style-type: none">• Up to 95% (non-condensing)
Certifications	<ul style="list-style-type: none">• CE, FCC

NETWORKING SOLUTIONS

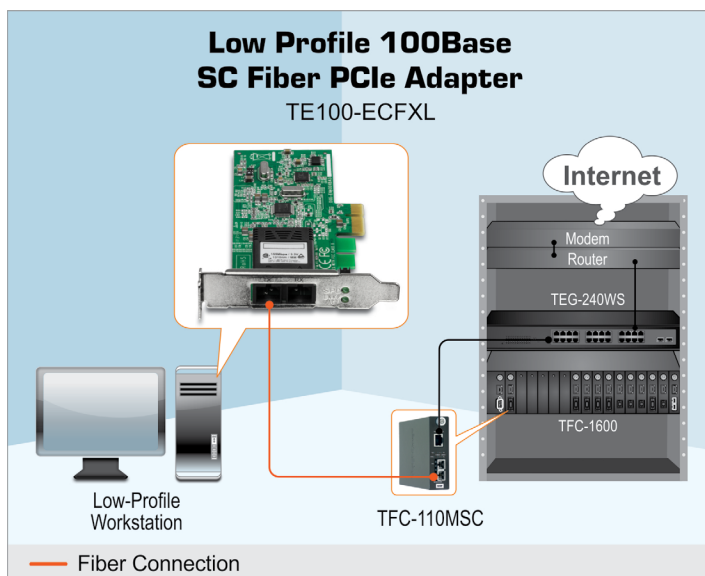

PACKAGE CONTENTS

TE100-ECFXL

Quick Installation Guide

CD ROM (Drivers and User's Guide)

RELATED PRODUCTS

TFC-110MSC	100Base-TX to 100Base-FX Multi Mode SC Fiber Converter
TE100-ECFX	100Base SC Fiber PCIe Adapter
TE100-S16G	16-Port 10/100 Mbps GREENnet Switch

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

