





# **1-Port Multi-Function USB Print Server** TE100-MFP1 (V1.0R)

TRENDnet's 1-Port Multi-Function USB Print Server, model TE100-MFP1, transforms most stand-alone multi-function and standard USB printers into a shared network resource. Install your multifunction printer in the most ergonomic location and then connect the compact TE100-MFP1 to a wired network.

An intuitive utility supports Windows and Mac operating systems and provides a seamless user experience. Scan, fax, and print functionality from any networked workstation. This compact device fits into the smallest spaces.

## **FEATURES**

- 1 x 10/100Mbps Auto-MDIX Fast Ethernet port
- 1 x USB 2.0 high speed port
- Backwards Compatible with USB 1.1 Devices
- Control Center utility supports Windows 7 (32/64-bit) / Vista (32/64-bit) / Windows XP(32/64-bit) and Mac OS X 10.4/10.5/10.6/10.7 operating systems
- Supports most All-In-One multi-function printers and regular USB printers
- · Share multi-function printers and regular USB printers over the network
- Control Center utility includes built in scan feature\*
- Supports NetUSB technology\*
- Share USB peripheral devices over the network including; digital cameras, web cams, speakers, iPods™, flash drives, external hard drives, printers, and memory card readers\*
- Universal Plug & Play (UPnP) installation
- Diagnostic LEDs
- · 3-year limited warranty
- \* Control Center utility installation required for each computer in order to access the print server


## **1-Port Multi-Function USB Print Server** TE100-MFP1 (V1.0R)



## **SPECIFICATIONS**

HARDWARE	
Standards	• IEEE 802.3 (10Base-T), IEEE 802.3u (100Base-TX), USB 1.1/2.0
LAN Port	• 1 x 10/100Mbps Auto-MDIX Ethernet port
USB Ports	• 1 x USB 2.0 Type-A
LED Indicators	• Power, Link, ACT, USB
TCP/IP Protocol Supported	• DHCP
Control Center Utility Supported OS	• Windows® 8.1, 8, 7, Vista, XP • Mac OS® 10.4-10.9
USB Devices Supported	• 127 max.
Button	Reset: Restores factory default settings
Power	<ul> <li>Input: 120 ~ 240V AC, 50~60Hz</li> <li>Output: 12V DC, 1A</li> </ul>
Power Consumption	• 1.9 Watts (max.)
Dimensions (LxWxH)	• 75 x 58 x 24 mm (3 x 2.3 x 1 in.)
Weight	• 60 g (2.0 oz.)
Temperature	• Storage: -10 ~ 60°C (13.9~139 °F) • Operating: 5 ~ 40°C (41~104 °F)
Humidity	Max. 90% (non-condensing)
Certifications	• CE, FCC

#### **NETWORKING SOLUTIONS**

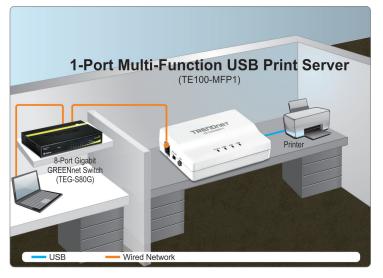

#### PACKAGE CONTENTS

TE100-MFP1
Multi-Language Quick Installation Guide
CD-ROM (Utility & User's Guide)
Power adapter (12V DC, 1A)
Network cable (1.5 m / 5 ft.)

#### RELATED PRODUCTS

TEW-MFP1	1-Port Wireless N Multi-Function USB Print Server
TEG-S80g	8-Port Gigabit GREENnet Switch
TEG-PCITXRL	Low Profile Gigabit PCI Adapter

#### **CONTACT INFORMATION**

### **TREND**net

20675 Manhattan Place, Torrance, CA 90501 USA Tel: 1-310-961-5500

Fax: 1-310-961-5511
Web: www.trendnet.com
Email: sales@trendnet.com
1-888-326-6061

