



## TE100-P1U 10/100Mbps Mini Print Server with 1 USB Printer Port

TRENDnet's TE100-P1U 10/100 Mini USB Print Server is an ideal network solution designed to transform any conventional USB printer into a shared resource on your network. TE100-P1U has a 10/100Mbps auto-sensing RJ-45 port, which connects to either 10Mbps or 100Mbps network. With its "Automatic IP" feature, the Print Server will automatically configure its IP address, making installation quick and easy. For advanced management, you can configure the print server using the Windows-Based Wizard, Admin Software or Web Browser. Also, the TE100-P1U supports Internet Printing Protocol, so users can print remotely to the USB printer via the Internet. Compact in design, but packed with features the TE100-P1U is the most cost effective way to add a USB printer anywhere on your network!



### FEATURES

- USB 1.1 Compliant
- One 10/100Mbps Auto-Sensing Fast Ethernet Port
- Acts as a DHCP client or use "Auto-IP" to self-assign an IP address automatically
- Supports TCP/IP, NetBEUI and AppleTalk protocols
- Easy Configuration through BiAdmin (Windows Application), Web-based management (HTTP)
- Supports Windows 95/98/Me/NT/2000/XP, Macintosh (OS 9.x and higher), Unix
- Supports PTP, LPD, SMB, IPP and Macintosh LaserWriter/Chooser (EtherTalk) printing methods
- Supports Diagnostic Printing with all settings and current status information
- Upgradeable Firmware
- 5-year Warranty

### BENEFITS

- **Integration Friendly:**  
Supports multiple protocols and all popular Operating Systems.
- **Flexible:**  
Integrates with either 10Base-T or 100Base-TX network.
- **Cost Effective:**  
Turns the stand-alone printer into a shared resource as a network printer.
- **Performance:**  
Full 100Mbps connectivity significantly boosts network printer performance.



# TE100-P1U

## 10/100Mbps Mini Print Server with 1 USB Printer Port

### SPECIFICATIONS

#### LAN Standards:

- IEEE 802.3 10Base-T and IEEE 802.3u 100Base-TX  
ANSI/IEEE 802.3 Auto-Negotiation

#### LAN Port:

- UTP/STP RJ-45 port

#### Printer Interface:

- USB 1.1 Compliant

#### Network Cables:

- 10Base-T: CAT 3, 4, 5 UTP/STP (100 meter max.)
- 100Base-TX: CAT 5 UTP/STP (100 meter max.)

#### Supported Protocols:

- TCP/IP, NetBEUI, and AppleTalk

#### LED Indicator:

- Status and Error

#### Power:

- 9 VDC, 500mA External Power Adapter

#### Dimensions(LxWxH):

- 86.5 mm x 59 mm x 25 mm ( 3.4x 2.3 x 1 inch)

#### Weight:

- 76.5 g. (2.7 Oz.)

#### Temperature:

- Operating Temperature: 0° ~ 40° C (32° ~ 104° F)
- Storage Temperature: -10° ~ 70° C (14° ~ 158° F)

#### Humidity:


- Operating: 10% to 80%
- Storage: 5% to 90%

#### Certifications:

- FCC, CE, VCCI, C-Tick and Class B



### NETWORKING SOLUTIONS

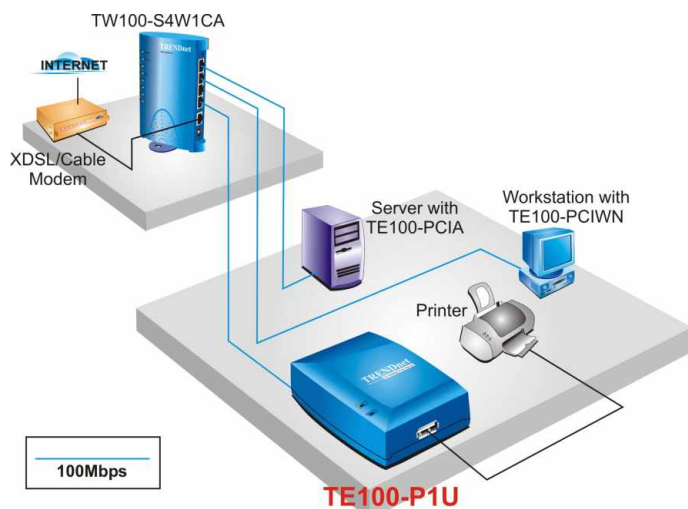

**To Order Please Call:**  
**1-888-326-6061**

### RELATED PRODUCT

- **TE100-P1P:** 10/100Mbps Mini Print Server with 1 Parallel Printer Port
- **TE100-P1U:** 10/100Mbps Mini Print Server with 1 USB Printer Port
- **TEW-P1U1P:** 11Mbps Wireless 1 USB + 1 Parallel Port Print Server
- **TEW-P1U:** 11Mbps Wireless 1 USB Port Print Server
- **TEW-P1P:** 11Mbps Wireless 1 Parallel Port Print Server
- **TE100-P2U1P:** 10/100Mbps 2 USB + 1 Parallel Printer Port Print Server
- **TE100-S5P:** 5-port 10/100Mbps Mini Switch
- **TE100-S8P:** 8-port 10/100Mbps Mini Switch

### ORDERING INFORMATION

**TRENDware International, Inc.**  
3135 Kashiwa Street  
Torrance, CA. 90505. USA  
Tel: 310-891-1100  
Fax: 310-891-1111  
Web: [www.TRENDNET.com](http://www.TRENDNET.com)  
Email: [sales@trendware.com](mailto:sales@trendware.com)

**TRENDnet**  
TRENDware, USA