





10/100Mbps USB 2.0 Print Server TE100-P1U (v2.1)

TRENDnet's TE100-P1U is a print server that transforms virtually a stand-alone networkable USB printer into a shared network printer. The TE100-P1U provides Fast Ethernet interface for integrating into existing network. The TE100-P1U is designed for virtually all printers equipped with USB 2.0 compliant printer port and it is an ideal network solution to convert conventional USB printer into a shared resource on the network.

FEATURES

- Compliant with USB 2.0 High-Speed Printing
- One RJ-45 10/100Mbps Auto-MDIX Fast Ethernet Port
- · Supports Email Printing and FTP Printing
- Includes LPR Program for Windows 95/98/ME TCP/IP Printing
- Supports IPP Printing for Windows 2000/XP
- Supports second HTTP port for Remote Web Configuration and IPP Printing
- Supports Mac 10.2 "Rendezvous" Zero-Configuration Function
- TCP/IP protocol supports DHCP, IPP, LPR, HTTP
- IP Assignment Support for DHCP
- Includes Windows-Based Administrative Program and Web-Based Configuration
- · Built-in Flash Memory for Easy Firmware Upgrade
- 5-Years Warranty

*Mac Systems are only compatible with Post-Script printers

BENEFITS

Integration Friendly:

Supports multiple protocols and all popular Operating Systems

Flexible

Integrates with 10Base-T, 100Base-TX

Cost Effective:

Turns the stand-alone printer into a network printer

Performance:

100Mbps bandwidth for wired network

NEW IMPLEMENTS

- New Housing
- Add Reset Button to restore setting to factory default


10/100Mbps USB 2.0 Print Server TE100-P1U(v2)

SPECIFICATIONS

Hardware		
Standards	• IEEE 802.3 10Base-T	
	• IEEE 802.3u 100Base-TX	
Printer Interface	USB 2.0, 1.1 Compliant USB Type A Port	
LAN Port	10/100Mbps Auto-Negotiation UTP/STP RJ-45 Port	
CPU/SDRAM/Flash ROM	RDC R2886 150MHz / 2MByte / 512KByte	
LED	Power, USB, Link/Act	
Transport Protocol	• TCP/IP	
TCP/IP Protocol Supported	DHCP, IPP, LPR, HTTP	
OS Support	Windows 95/98(SE)/ME/NT/2000/XP/2003	
	Netware 5.x NDPS LPR Remote Printing (TCP/IP)	
	Unixware	
	• Linux	
	Mac OS X (IP Printing)	
Management	PS Utility or Web-Browser Configuration	
Power	5V DC 2.5A External Power Adapter	
Dimensions (LxWxH)	• 115 x 85 x 30mm (4.5 x 3.4 x 1.2 inches)	
Weight	• 128g (4.5oz.)	
Temperature	• Operating : 0 ° ~50 ° C (32 ° ~122 ° F) • Storage: -25 ° ~55 ° C (-13 ° ~131 ° F)	
Humidity	• 10%~90% (non-condensing)	
Certifications	• CE, FCC	

NETWORKING SOLUTIONS

10/100Mbps USB 2.0 Print Server (TE100-P1U)

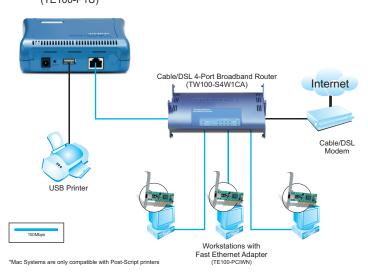

PACKAGE CONTENTS

- TE100-P1U
- Quick Installation Guide
- Utility & User's Guide CD-ROM
- Power Adapter (5V DC, 2.5A)

RELATED PRODUCTS

TE100-P1P	10/100Mbps Parallel Print Server
TE100-P21	10/100Mbps Multi-Port Print Server 2 USB 2.0 & 1 Parallel Printer Port
TEW-P1UG	54Mbps 802.11g Wireless USB 2.0 Print Server

ORDERING INFORMATION

TRENDIET

3135 Kashiwa Street, Torrance, CA 90505 USA

Tel: 1-310-891-1100 Fax: 1-310-891-1111 Web: www.trendnet.com Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

