



## **TE100-P2U1P** **10/100Mbps Print Server with 2 USB & 1 Parallel Printer Port**

TRENDnet TE100-P2U1P is a Fast Ethernet print server that transforms virtually all stand-alone USB or Parallel printer into a shared network printer. The TE100-P2U1P is compatible with 10Mbps or 100Mbps Ethernet network and it has two USB 1.1 and one Parallel printer port. The TE100-P2U1P is an ideal network solution that transforms conventional USB or Parallel printer into a shared resource on the network. Network professionals can easily manage the print server using Web Browser or Windows based setup wizard and utilize the TE100-P2U1P to promote productivity in a workgroup environment with low equipment cost.



### FEATURES

- One 10/100Mbps Auto-Sense and Auto-MDIX Fast Ethernet RJ-45 port
- Two USB 1.1 type A female printer ports
- One female DB-25 (25-pin) parallel printer port
- Supports TCP/IP, IPX, NetBEUI, AppleTalk, LPR and SMB network protocols
- DHCP client
- Designed for Windows 95/98/NT4.0/Me/2000/XP, NetWare (Bindery/NDS), Mac OS 8.1 and above, Linux and Unix
- Supports Internet Printing Protocol (IPP)
- 1 MB flash memory and 2MB system memory
- Bi-Directional Communication
- Easy configuration via windows-based administrative program, web browser or Telnet
- Compatible with SNMP management software and HP Web JetAdmin
- Upgradeable Firmware
- 3-year warranty

### BENEFITS

- **Integration Friendly:**  
Supports multiple protocols and all popular Operating Systems.
- **Flexible:**  
Integrates with either 10Base-T Ethernet or 100Base-TX Fast Ethernet network. Supports both USB and Parallel printers.
- **Cost Effective:**  
Turns the stand-alone printer into a network printer.
- **Performance:**  
Full 100Mbps connectivity significantly boosts network printer performance.



# TE100-P2U1P

## 10/100Mbps Print Server with 2 USB & 1 Parallel Printer Port

### SPECIFICATIONS

#### LAN Standards:

- IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, ANSI/IEEE 802.3 auto-negotiation

#### LAN Port:

- 10/100Mbps UTP/STP RJ-45 port

#### Printer Interface:

- USB 1.1 compliant Type A female DB-25 (25 pin) parallel port

#### Network Cables:

- Cat. 3, 4, 5 UTP/STP for 10Base-T (100 meters max.)
- Cat. 5 UTP/STP for 100Base-TX (100 meters max.)

#### Supported Protocols:

- TCP/IP, IPX, NetBEUI, AppleTalk, LPR and SMB

#### LED Indicator:

- USB, PARALLEL and STATUS

#### Power:

- 5V DC, 2A, External Power Adapter

#### Dimensions (W x L x H):

- 105 x 177 x 33 mm (6.97 x 4.13 x 1.3 inches)

#### Weight:

- 226.8 g. (8 Oz.)

#### Temperature:

- Operating Temperature: 0° ~ 50°C (32° ~ 122°F)
- Storage Temperature: -5° ~ 65°C (23° ~ 149°F)

#### Humidity:


- Operating: 0% ~ 70%
- Storage: 0% ~ 80%

#### Emissions:

- FCC Class A, CE Class A



### NETWORKING SOLUTIONS

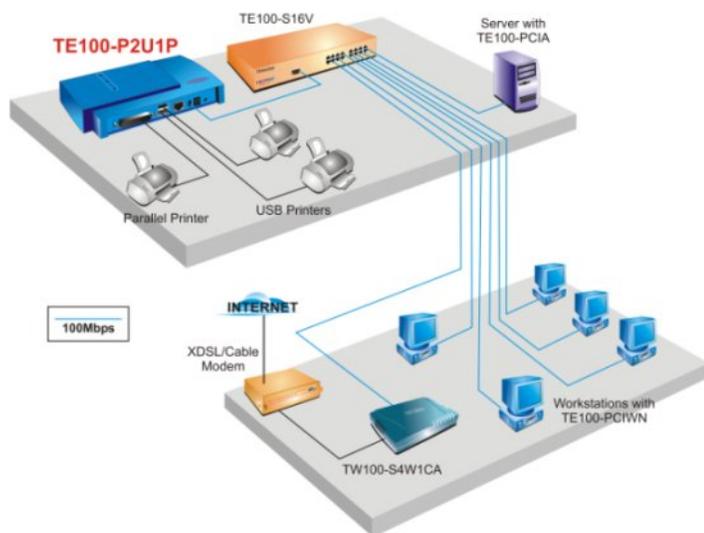

**To Order Please Call:**  
**1-888-326-6061**

### PRODUCT INFORMATION

- **TE100-P2U1P:** 10/100Mbps 2 USB + 1 Parallel Ports Print Server
- **TE100-PS1U:** 10/100Mbps 1 USB Port Print Server
- **TE100-PS1plus:** 10/100Mbps 1-Parallel Port Print Server
- **TE100-PS3plus:** 10/100Mbps 3-Parallel Port Print Server
- **TEW-P1P:** 11Mbps Wireless 1 Parallel Port Print Server
- **TEW-P1U:** 11Mbps Wireless 1 USB Port Print Server
- **TEW-P1U1P:** 11Mbps Wireless 1 USB + 1 Parallel Port Print Server

### ORDERING INFORMATION

**TRENDware International, Inc.**  
3135 Kashiwa Street  
Torrance, CA. 90505. USA  
Tel: 310-891-1100  
Fax: 310-891-1111  
Web: [www.trendnet.com](http://www.trendnet.com)  
Email: [sales@trendware.com](mailto:sales@trendware.com)

**TRENDnet**  
TRENDware, USA