



TE100-PS1U *10/100Mbps Multi-Protocol USB Print Server*

TRENDnet TE100-PS1U is a multi-protocol print server that transforms virtually all stand-alone USB printer into a shared network printer. The TE100-PS1U is equipped with auto-sensing 10/100Mbps interface allowing seamless integration into existing network. The TE100-PS1U is designed for printers equipped with USB 1.1 compliant interface. The TE100-PS1U is an ideal network solution to transform conventional USB printers into shared resources on the network. Network managers can utilize the TE100-PS1U to promote productivity in a workgroup environment and lower equipment cost.



FEATURES

- One RJ-45 10/100Mbps auto-sense Fast Ethernet port
- One USB Type A port
- USB 1.1 compliant
- Compact pocket size
- Supports TCP/IP, NetBEUI and AppleTalk transport protocols
- Supports Windows 95/98/NT/Me/2000/XP, NetWare5.x/6.x (NPDS LPR printing), HP-UX, Sun OS, UnixWare, Solaris, SCO Unix, IBM AIX, Mac OS AppleTalk and Linux
- Supports Bi-Directional Communication
- Includes windows-based administrative program and web-based configuration
- Latest MIB-II (RFC 1213) for SNMP management
- TCP/IP protocol supports SNMP, Telnet, TFTP, FTP, LPD, DHCP, BOOTP and RARP
- Includes LPR program for Windows 95/98/ME TCP/IP printing
- Upgradeable Firmware
- 3-years warranty

BENEFITS

- **Integration Friendly:**
Supports multiple protocols and all popular Operating Systems.
- **Flexible:**
Integrates with either 10Base-T Ethernet or 100Base-TX Fast Ethernet network.
- **Cost Effective:**
Turns the stand-alone printer into a network printer.
- **Performance:**
Full 100Mbps connectivity significantly boosts network printer performance.



TE100-PS1U

10/100Mbps Multi-Protocol USB Print Server

SPECIFICATIONS

LAN Standards:

- IEEE 802.3 10Base-T and IEEE 802.3u 100Base-TX
- ANSI/IEEE 802.3 NWay auto-negotiation

LAN Port:

- 10/100Mbps UTP/STP RJ-45 port

Printer Interface:

- USB Type A Male, USB 1.1 compliant

Network Cables:

- Cat. 3, 4, 5 UTP/STP for 10Base-T (100 meters max.)
- Cat. 5 UTP/STP for 100Base-TX (100 meters max.)

Supported Protocols:

- TCP/IP, NetBEUI, and AppleTalk/EtherTalk

LED Indicator:

- Power, LAN, USB

Power:

- External Power Supply, 5V DC 2.4A

Dimensions:

- 90 x 90 x 40 mm (3.54 x 3.54 x 1.57 inches)

Weight:

- 116 g. (4.1Oz.)

Temperature:

- Operating: 0°~50°C (32°~122°F)
- Storage: -25°~55°C (-13°~131°F)

Humidity:


- Operating: 10%~90%
- Storage: 5%~95%
(non-condensing @ 30°C/86°F)

Emissions:

- FCC class B, CE class B, VCCI Class B



NETWORKING SOLUTIONS

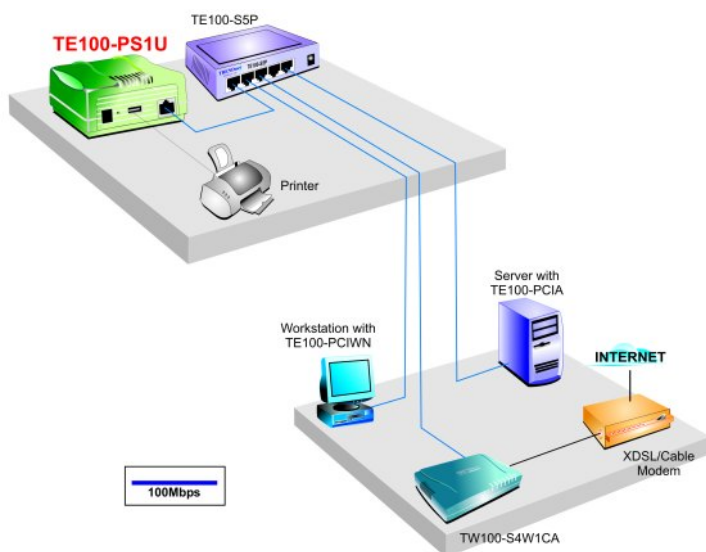

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- **TE100-PS1U:** 10/100Mbps USB port Multi-Protocol Print Server
- **TEW-PS1U:** 11Mbps Wireless USB port Multi-Protocol Print Server
- **TE100-PS1plus:** 10/100Mbps EtherPort Multi-Protocol Print Server
- **TE100-PS3plus:** 10/100Mbps EtherPort Multi-Protocol Print Server

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA