



SecurView Wireless N Day/Night Internet Camera

TV-IP121WN

- Quick Installation Guide [1]

1. Before You Start

Package Contents

- TV-IP121WN
- CD-ROM (Utility and User's Guide)
- Multi-Language Quick Installation Guide
- 1 x 2dbi Detachable Antenna
- Network Cable (1.5m/5ft.)
- Mounting Kit
- Power Adapter (5V DC 2.5A or 1.2A)

If any of the above contents are missing, please contact your reseller.

Minimum Requirements


- A computer with a wired or wireless network adapter properly installed
- CD-ROM Drive
- VGA Resolution: 800 x 600 or above
- Web Browser: Internet Explorer (6.0 or higher)
- Wireless Router (e.g. TEW-691GR) or Access Point (e.g. TEW-690AP)
- An available DHCP Server – routers usually have a built-in DHCP server

SecurView Pro Requirements

Supported Operating Systems	1-8 Cameras		9-32 Cameras	
	CPU	Memory	CPU	Memory
Windows 7 (32/64-bit)/ Windows Vista (32/64-bit)/ Windows XP (32/64-bit)	Intel Core 2 Duo	2GB RAM or above	Intel Core 2 Quad	4GB RAM or above

2. Hardware Installation

1. Attach the antenna to the IP Camera.
2. Connect a RJ-45 network cable from a Switch/Router to the Ethernet port on the IP Camera.
3. Connect the Power Adapter to the IP Camera and then to a power outlet.
4. Verify the Power (amber) and Link (Green/Blinking) LEDs are on.

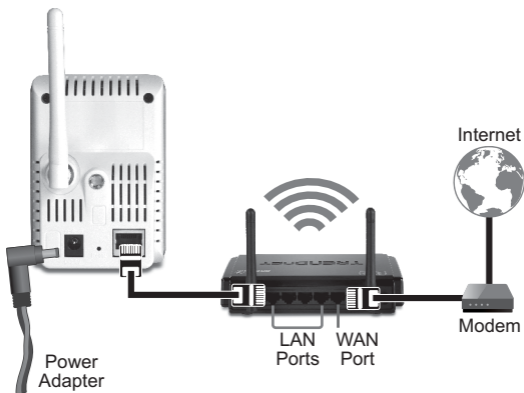


3. Configure the IP Camera

Note: It is recommended that you configure the IP Camera from a wired computer.

1. Insert the Utility CD-ROM into your CD-ROM drive.
2. Click IP setup.




3. Follow the **Installation Wizard** instructions.
4. Once installation is complete click **Close**.

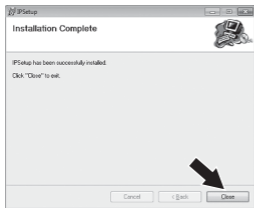

5. Click the **Start** (Windows XP) or **Windows** (Windows 7/Vista) icon. Go to → **Programs TRENDnet** → **IPSetup** and click **IPSetup**.

6. Double click the IP Camera to access the browser configuration. Verify that the MAC address listed matches the IP address on your IP camera. The MAC address is listed on the bottom of the TV-IP121WN. Click **Search** if no cameras are detected.

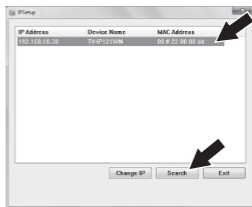


7. When the login screen appears, enter the User name and Password, and then click **OK**.
By default:
User Name: **admin**
Password: **admin**

- Follow the instructions on the screen to install the ActiveX control.
- Click **Setup, Network** and then click **Wireless**.



- Click **Site Survey**. Select an ESSID. Then click **Apply**.

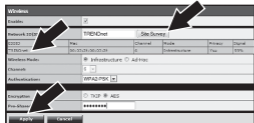


- Disconnect the RJ-45 cable and unplug the power. Then plug the power back in.

Note:

The TV-IP121WN will not work wirelessly until you disconnect the network cable from the back of the camera.

- Verify the Power (Amber) and Link (Green/Blinking) LEDs are on.
- Click **Live View**. Live video will now appear.

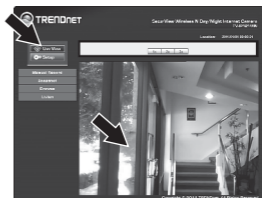

Declaration of Conformity



Company Information:

Company Name:
TRENDnet, Inc.

Company Address:
20675 Manhattan Place
Torrance, CA 90501
USA



Product Information:

Product Description:
SecurView Wireless N Day/Night Internet Camera

Model Number:
TV-IP121WN

Brand name:
TRENDnet

Technical Standards:

EN 300 328 V1.7.1: 10-2006
EN 301 489-1 V1.8.1: 04-2008
EN 301 489-17 V2.1.1: 05-2009
EN 55022 : 2006 + A1 : 2007 Class B
EN 61000-3-2 : 2009
EN 61000-3-3 : 2008
EN 60950-1 : 2006 + A11 : 2009

Declaration:

The product is herewith confirmed to comply with the requirements of Directive 1999/5/EC of the Council (European Parliament) on the radio and telecommunications terminal equipment and Energy-related products Directive 2009/125/EC.

I hereby declare that the products and devices mentioned above are consistent with the standards and provisions of the guidelines.

Sonny Su

Full Name

July 14, 2011

Date

Director of Technology

Position / Title

Signature



Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDnet's website at <http://www.trendnet.com/register>

Certifications

This equipment has been tested and found to comply with FCC and CE Rules.
Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received. Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with you Local Authority or Retailer for recycling advice.



NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

ADVERTENCIA

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.

TRENDnet
20675 Manhattan Place
Torrance, CA 90501. USA