TRENDNET®

Quick Installation Guide

TEG-PCBUSR

Table of Contents
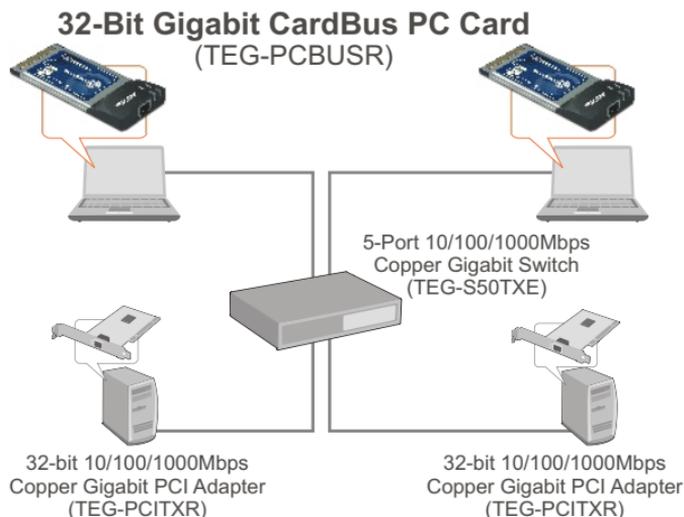
1. Before You Start

Package Contents
• TEG-PCBUSR
• Driver CD-ROM
• Quick Installation Guide

System Requirements

- CD-ROM Drive
- PC CardBus Type II Slot
- CPU: Intel Pentium 300Mhz or above
- Memory: 64MB RAM or above
- Windows 98SE/ME/2000/XP

Application

32-Bit Gigabit CardBus PC Card
(TEG-PCBUSR)

5-Port 10/100/1000Mbps
Copper Gigabit Switch
(TEG-S50TXE)

32-bit 10/100/1000Mbps
Copper Gigabit PCI Adapter
(TEG-PCITXR)

32-bit 10/100/1000Mbps
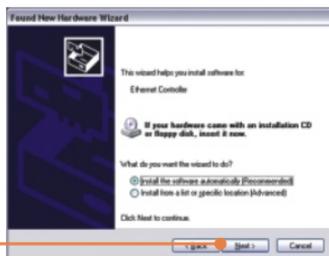Copper Gigabit PCI Adapter
(TEG-PCITXR)

Note: The TEG-PCBUSR is hot-pluggable, you can connect or disconnect the TEG-PCBUSR while the computer is on.

1. The **Found New Hardware Wizard** appears, select **No not this time** , and then click **Next**.
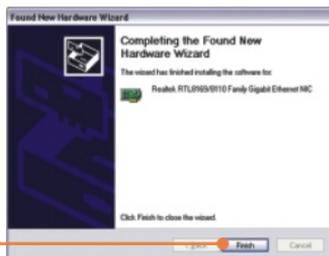
2. Insert the **Driver CD-ROM** into your computer's CD-ROM Drive.

3. Select **Install the software automatically (Recommended)** and then click **Next**.

4. Click **Finish**.

Your installation is now complete.

For detailed information regarding the TEG-PCBUSR configuration and advanced settings, please refer to the TRENDnet's website at www.trendnet.com

Troubleshooting

Q1: Windows is unable to recognize my hardware. What should I do?

A1: First, verify that your computer meets the system requirements as specified in **Section 1**. Second, go to **Start -> Control Panel -> Hardware -> Device Manager**. In the list of device types, double-click on **Network Adapters**. If you see the device with a yellow question mark or exclamation point next to it, double-click on it, click on **Drivers** and click **Update Drivers**. Follow the Hardware Update Wizard instructions as illustrated in **Section 2.** Third, if the device manager fails to recognize the presence of a new networking adapter, verify that the network adapter is firmly seated in the PC CardBus slot. Fourth, install the adapter into another available PC CardBus slot

Q2: Windows recognizes my new hardware, but I'm unable to connect to my network. What should I do?

A2: First, verify that the RJ-45 Ethernet Cable is securely connected from your switch or router to your network adapter. Second, verify that the LEDs on your network card are lit. Third, verify that the TCP/IP settings are set to **Obtain an IP address automatically**.

Q3: When I connect the adapter to a gigabit switch, I am not getting gigabit speeds. What should I do?

A3: Make sure you are using CAT-5e or CAT-6 Ethernet Cables. Some CAT-5 cables are not rated to run in Gigabit.

If you still encounter problems or have any questions regarding the TEG-PCBUSR, please refer to the User's Guide included on the Driver CD-ROM or contact TRENDnet's Technical Support Department.

Certifications

This equipment has been tested and found to comply with FCC and CE Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received. Including interference that may cause undesired operation.

TRENDnet

TRENDnet Technical Support

US · Canada

Toll Free Telephone: 1(866) 845-3673

24/7 Tech Support

Europe (Germany · France · Italy · Spain · Switzerland · UK)

Toll Free Telephone: +00800 60 76 76 67

English/Espanol - 24/7
Francais/Deutsch - 11am-8pm, Monday - Friday MET

Worldwide

Telephone: +(31) (0) 20 504 05 35

English/Espanol - 24/7
Francais/Deutsch - 11am-8pm, Monday - Friday MET

24/7 Technical Support 365

Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDnet's website at http://www.trendnet.com

TRENDnet
3135 Kashiwa Street
Torrance, CA 90505
USA