



16-Port Gigabit Switch

TEG-S160TX(D1.0R)

TEG-S160TX is a high performance 16-port rack mountable Copper Gigabit Switch. With auto-negotiation technology, the TEG-S160TX automatically negotiates between 10Base-T, 100Base-TX and 1000Base-T network speeds, as well as half and full duplex modes. The Auto-MDIX feature on each port automatically detects and adjusts connection type with either straight-through or crossover cable. Providing simple migration, scalability, and flexibility to handle new applications and data types, TRENDnet's TEG-S160TX is a highly reliable and cost effective solution for high-speed network applications.

FEATURES

- 16 10/100/1000Mbps Auto-Negotiation and Auto-MDIX ports
- Full/Half Duplex Transfer Mode for Each Port (1000Base-T connections support full-duplex mode only)
- Store and Forward Switching Method
- High Performance Single-Chip Design
- Non-Blocking Wire Speed Reception and Transmission
- IEEE 802.3x Full-Duplex Flow Control
- Integrated Address Look-Up Engine, Supports 8k Absolute MAC Address
- 340KBytes RAM Data Buffering
- Extensive Front Panel Diagnostic LEDs
- Standard 19" Rack-Mount Size
- 5-year limited warranty


16-Port Gigabit Switch

TEG-S160TX(D1.0R)

SPECIFICATIONS

Hardware	
LAN Standards	• IEEE 802.3 10Base-T, 802.3u 100Base-TX and 802.3ab 1000Base-T, IEEE 802.3x Full Duplex Flow Control
Network Media	• Ethernet: 2-pair UTP Cat. 3, 4, 5, up to 10Mbps • Fast Ethernet: 2-pair UTP Cat. 5, up to 100Mbps • Gigabit: 4-pair UTP Cat. 5, 5E, 6, up to 1000Mbps
Transmission Method	• Store-and-Forward
Transfer Rates	• Ethernet: 10Mbps (Half-Duplex), 20Mbps (Full-Duplex) • Fast Ethernet: 100Mbps (Half-Duplex), 200Mbps (Full-Duplex) • Gigabit Ethernet: 2000Mbps (Full-Duplex)
Switch Fabric	• 31Gbps Forwarding Capacity
Data RAM Buffers	• 340Kbytes
MAC Table	• 8K entries per device
LED	• Per Unit: Power • Per Port: Link/ACT, 1000M, 100M
Power	• 100~240V AC, 50/60Hz, Internal Power Supply
Power Consumption	• 13.5 watts. (max)
Dimensions	• 440 x 210 x 44 mm (17.3 x 8.27x 1.73 inch) (W x H x D)
Weight	• 3Kg (6.6 lb)
Temperature	• Operating: 0° ~ 40° C (32° ~ 104°F) • Storage: -10° ~ 70° C (14° ~ 158°F)
Humidity	• 10% ~ 90% (non-condensing)
Emissions	• FCC, CE

NETWORKING SOLUTIONS

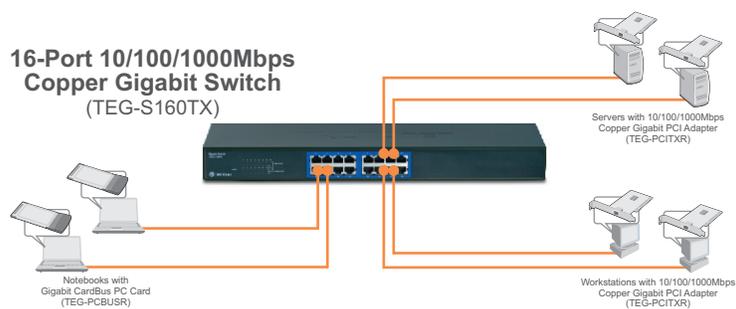

PACKAGE CONTENTS

- TEG-S160TX
- Multi-Language Quick Installation Guide
- Rack Mount Kit
- Power Cord

RELATED PRODUCTS

TEG-S240TX	24-Port Gigabit Switch
TEG-PCBUSR	Gigabit PC Card
TEG-PCITXR	Gigabit PCI Adapter

ORDERING INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

