



## 8-Port Gigabit GREENnet Switch TEG-S80Dg(V1.1R)

The compact 8-Port Gigabit GREENnet Switch (TEG-S80Dg) provides high bandwidth performance, ease of use and reliability, all while reducing power consumption by up to 70%.



GREENnet technology automatically adjusts power voltage as needed, resulting in substantial energy savings. An internal power supply eliminates a bulky external power adapter and frees up precious space around electrical power outlets.

Boost your office efficiency and eliminate network congestion with Gigabit speeds and total switching capacity of 16Gbps with Full-Duplex Mode. Plug and Play this sturdy metal switch for reliable high-speed network connectivity.

## FEATURES

- 8 x 10/100/1000Mbps Auto-Negotiation, Auto-MDIX Gigabit Ethernet ports
- GREENnet technology reduces power consumptions
- Store-and-Forward switching architecture with non-blocking wire-speed performance
- IEEE 802.3x Flow Control for full-duplex mode
- Back pressure Flow Control for half-duplex mode
- Integrated address look-up engine with 4K absolute MAC address table and 128KBytes RAM data buffering
- Operates and maximizes packet filtering and forwarding rate
- Jumbo Frame support up to 9612Bytes
- Sturdy metal housing
- Diagnostic LEDs and Plug & Play
- 3 years limited warranty

# 8-Port Gigabit GREENnet Switch


## TEG-S80Dg(V1.1R)

### SPECIFICATIONS

Hardware	
Standards	• IEEE 802.3 10Base-T; IEEE 802.3u 100Base-TX • IEEE 802.3ab 1000Base-T; IEEE 802.3x Flow Control
Network Media	• Ethernet: Cat. 3,4,5, up to 100m • Fast Ethernet: Cat. 5, up to 100m • Gigabit Ethernet: Cat. 5, 5e,6, up to 100m
Data Rate	• Ethernet: 10Mbps/20Mbps (half/full-duplex) • Fast Ethernet: 100Mbps/200Mbps (half/full-duplex) • Gigabit Ethernet: 2000Mbps (full-duplex)
Protocol / Topology	• CSMA/CD, Star
Power Consumption	• 5.1w (max)
Switch Fabric	• 16Gbps forwarding capacity
Data RAM Buffer	• 128KBytes
Interface	• 8 x 10/100/1000Mbps Auto-MDIX RJ-45 ports
Filtering Table	• 4K entries
Diagnostic LED	• Power, Link/ACT, 100Mbps, 1000Mbps
Power	• 100~240VAC, 50/60Hz Internal universal switching power
Dimension	• 171 x 98 x 28mm (6.7 x 3.86 x 1.1 in)
Weight	• 450g (15.9oz)
Temperature	• Operating: 0° ~ 40° C (32° ~ 104° F) • Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	• 5%~90% (non-condensing)
Certifications	• FCC, CE

\*Max power savings compared with standard TRENDnet switches.

### NETWORKING SOLUTIONS

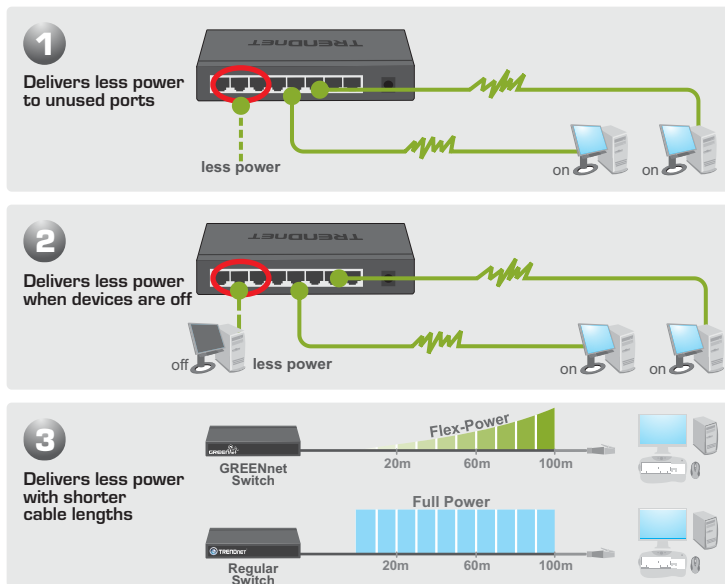

### PACKAGE CONTENTS

- TEG-S80Dg
- Multi-Language Quick Installation Guide
- Power cord

### RELATED PRODUCTS

TEW-639GR	300Mbps Wireless N Gigabit Router
TS-S402	2-Bay SATA I/II Network Storage Enclosure
TEG-PCITXR	Gigabit PCI Adapter

### CONTACT INFORMATION

#### TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

