




## 54Mbps 802.11g Wireless USB 2.0 Adapter with HotSpot Detector

TEW-429UB [c1]

The 802.11g Wireless USB 2.0 adapter combines features from Wi-Fi detectors and standard 802.11g wireless adapter to deliver the perfect solution for mobile users. It has built-in LCD display helps you determine an access point's security scheme (WPA/WPA2, WEP), signal strength, and wireless standard (802.11b or 802.11g) without turning on your laptop!

### FEATURES

- Wi-Fi Compliant with IEEE 802.11g and IEEE 802.11b Standards
- Detects IEEE 802.11b, and 802.11g HotSpots
- Connects to IEEE 802.11b or 802.11g Wi-Fi Devices
- Supports Ad-Hoc (Peer-to-Peer) Mode or Infrastructure (AP-Client) Mode
- Dynamic Data Rate Scaling at 54, 48, 36, 24, 18, 12, 9 and 6Mbps for 802.11g
- Dynamic Data Rate Scaling at 11, 5.5, 2 and 1Mbps for 802.11b
- Built-in Rechargeable Li-on Battery (Automatically charge when connected to the USB port) and Back Light Support
- Hotspot Finder displays SSID, Channel, Security Enable/Disable and Signal Strength information
- Supports Custom Search by Signal Strength, SSID or Encryption
- Maximum Reliability, Throughput and Connectivity with Automatic Data Rate Switching
- Supports WEP, WPA/WPA2 and WPA-PSK/WPA2-PSK without Performance Degradation
- Low Interference and High Susceptibility Guarantee Reliable Performance
- Compatible with Windows 98SE/ME2000/XP/2003 Server
- Range of 35~100 meters indoor, 100~300 meters outdoor (depends on the environment)
- Simple User Setup & Diagnostics Utilities
- 3-Year Warranty

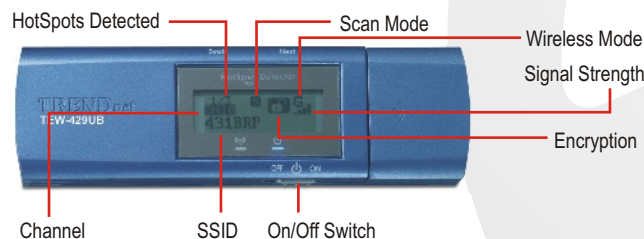


# 54Mbps 802.11g Wireless USB 2.0 Adapter with HotSpot Detector

## TEW-429UB(c1)

### SPECIFICATIONS

Hardware	
Interface	• USB 2.0, 1.1 Compliant
LCD / LED	• 96 x 32 pixels, Back Light / PWR, ACT
Control	• Power On/Off, Scan, Next
Rechargeable Battery	• 180mAh
Power Consumption	• 280mA
Dimensions (LxWxH)	• 97.3 x 28.6 x 14 mm (3.8 x 1.1 x 0.6 inches)
Weight	• 35g (1.2 oz.)
Temperature	• Operating: 0° ~ 40°C (32° ~ 104° F) • Storage: -20° ~ 70° C (-4° ~ 58°F)
Humidity	• 10% ~ 90%max (Non-condensing)
Safety Emissions	• FCC, CE
Wireless	
Frequency	• 2.412 ~ 2.484 GHz
Module Technique	• 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11g: OFDM
Media Access Protocol	• CSMA/CA
Data Rate (auto fallback)	• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps • 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps
Transmit Power	• 15dBm 2dBm
Receiving Sensitivity	• 802.11b: -87dBm@11Mbps • 802.11g: -72dBm@54Mbps
Encryption	• 64/128-bit WEP (Hex / Passphrase), WPA/WPA2 (AES/TKIP) • WPA-PSK/WPA2-PSK, 802.1x
Channels	• 1~11 (US), 1~13 (EU), Japan (11b :1~14, 11g: 1~13)

### NETWORKING SOLUTIONS

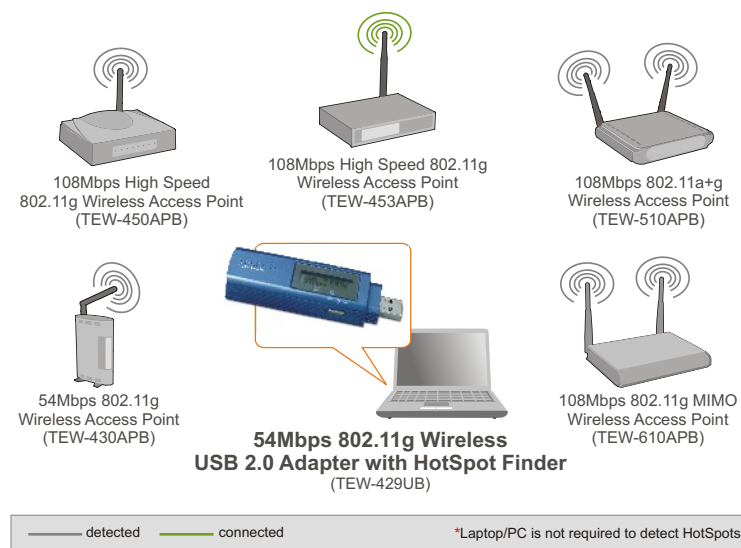

### PACKAGE CONTENTS

- TEW-429UB
- Utility & Driver CD-ROM
- Multi-Language Quick Installation Guide

### RELATED PRODUCTS

TEW-421PC	54Mbps 802.11g Wireless PC Card
TEW-423PI	54Mbps 802.11g Wireless PCI Adapter
TEW-430APB	54Mbps 802.11g Wireless Access Point

### ORDERING INFORMATION

#### TRENDNET

3135 Kashiwa Street, Torrance, CA 90505 USA  
 Tel: 1-888-326-6061  
 Fax: 310-891-1111  
 Web: [www.trendnet.com](http://www.trendnet.com)  
 Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

