



快速安裝手冊

TEW-AI750
TEW-AI750B

快速安裝手冊	1
1. 在你開始之前	1
2. 如何安裝	3
常見問題	7

1. 在你開始之前




包裝內含物

- TEW-AI75O/TEW-AI75OB
- 天線架設底座(僅適用於TEW-AI75OB)
- 快速安裝手冊
- 天線架設成套工具
(僅適用於TEW-AI75OB only)

產品細節


這個全向型的室內天線有一個reverse SMA的母頭，可以接在你的無線基地台或者是網卡上。

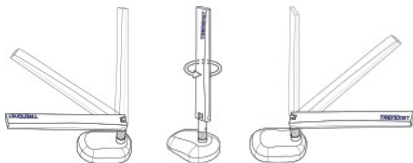


⚠ 警告: 這個天線可上下 0° 到 180° 以及旋轉 360° 。內部的天線線材是固定的，所以請不要旋轉超過 360° 。

牆壁或屏風掛式架設(天線基座以及內附的磁鐵)

關於天線的安裝, 你可以利用富在裡面的配件和螺絲釘將天線架到牆上。



⚠ 警告: 請不要將天線放置水平狀。天線是跑水平訊號, 所以垂直方向放置才是正確的。

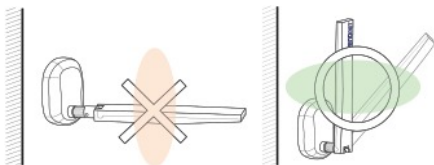


2. 如何安裝


建議可跟此天線連接的設備

警告: 請確認你的無線設備上的天線是可以拆卸的。

無線基地台/無線路由器, 有可拆卸式天線



PCI 網卡或網路攝影機 (IP Camera), 有可拆卸式天線

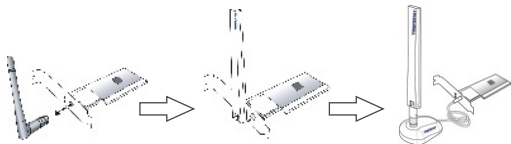

建議: 由於 WiFi 設備的天性 (傳送/接收), 建議你同時安裝外部天線在基地台和 Client 端。


建議安裝位置

這個全向型天線360°傳送和接收。因此,最理想的天線位置是放在希望訊號覆蓋範圍的中央。



天線基座架設程序以及架構

⚠ 請在你開始在牆上鑽洞之前,先讀取下面的安裝步驟。

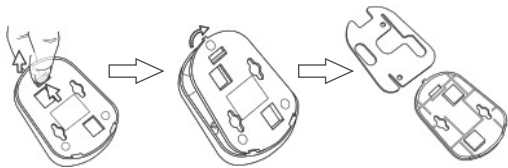

壓上方的小片

打開蓋子

拿開增重金屬片


移除底部外殼以後,請在天花板夾座下移除增重金屬片,讓螺絲孔暴露在外。

⚠ 為了減少重量和增加電磁力,強力建議金屬底座在天線安裝到天花板,隔板,或者任何金屬表面前,請先移除。


⚠ 警告: 請確定無線基地台/無線 Client 設備可以連接到你選擇的天線位置(天線線材是 1 公尺 / 3 英尺)。



選擇位置





將基座暫時定位



記號螺絲位置


關於螺絲

當您鑽洞在石牆/石膏岩/石膏板上以後,插入塑膠固定錨至洞裡(洞約1/8(3mm))。請如下圖所繪製一樣留 3 到 5mm (1/8 吋)的螺絲釘在外。




天花板架設使用天花板夾或磁鐵


這項特殊的天花板裝置主要建議用於無線基地台裝置隱藏於天花板上或是防盜保護裝置啟用時。




如何組裝天線底座, 使其可以安裝在天花板上




壓上方小片並移除



反轉外殼使天花板夾座露出



將天花板夾鎖到T樑上



隱藏無線基地台/無線路由器

⚠ 注意: 如果天花板T樑是鐵做的, 就不是那麼需要將天線底座拆開, 因為底座本身是磁鐵, 可以很輕易的將天線吸附在鋼樑上。

Q1. 為什麼某些我的無線電腦收得到 WiFi 訊號，其他電腦卻收到比較弱的訊號？

A1. TEW-AI750 是一個全向型的天線，可以在特定的範圍內中寄送和收取訊息。你可以調整無線基地台的位置，延伸你的TEW-AI750 到一個理想的位置上，或者把那些電腦搬到比較接近無線基地台的位置。

Q2. 我的無線基地台指示它有接收能力，而且我的電腦在 TEW-AI750 的訊號範圍內。然而，我的電腦卻無法收到任何來自我的無線基地台的訊號。

A2. 確定你有正確的把天線跟無線基地台連接在一起(看第 2 步驟硬體安裝部分)

Q3. TEW-AI750 是否能和我的IEEE 802.11a 的無線路由器或無線網卡連接？

A3. 可以。 TEW-AI750 可以跟 IEEE 802.11a/b/g 的無線設備相容。

Q4. 它是否一定要用到 TEW-AI750 內附的螺絲或者牆用錨釘？

A4. 只有在你決定將 TEW-AI750 架設在永久固定的位置上才必須要用到那些釘子。斟酌使用所附的架設用托架。

如果你有任何關於 TEW-AI86D/TEW-AI86DB 的問題，請與TRENDnet 技術支援部門聯繫。

認證：

本設備測試符合FCC 和CE的所有規範。

操作必需遵循以下二狀況：

- (1) 這個設備可能不會產生有害的干擾。
- (2) 這個設備必須接收任何收到的干擾。包括會產生不適當操作的干擾。



廢電子產品請勿和家用廢棄物一起丟棄。請棄置於設有回收設施的地方。並遵守政府或零售商回收的忠告。



備註：製造商對任何未經授權修改的產品所引起的收音機或電視干擾不會負起責任。未經授權修改產品的使用者將會喪失操作這個設備的權利。

Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

TEW-AI750/TEW-AI750B - 3 Years Warranty

If a product does not operate as warranted above during the applicable warranty period, TRENDnet shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product. All products that are replaced will become the property of TRENDnet. Replacement products may be new or reconditioned.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet office within the applicable warranty period for a Return Material Authorization (RMA) number, accompanied by a copy of the dated proof of the purchase. Products returned to TRENDnet must be pre-authorized by TRENDnet with RMA number marked on the outside of the package, and sent prepaid, insured and packaged appropriately for safe shipment.

WARRANTIES EXCLUSIVE: IF THE TRENDnet PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDnet'S OPTION, REPAIR OR REPLACEMENT. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDnet NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDnet'S PRODUCTS.

TRENDnet SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDnet ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDnet'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

AC/DC Power Adapter, Cooling Fan, and Power Supply carry 1 Year Warranty



連絡技術支援

美國

電話: (866) 845-3673
傳真: (310)626-6267
網站: www.trendnet.com
電郵: support@trendnet.com
24/7 Tech Support



台灣

電話: 02-27595787
傳真: 02-27276941
電郵: f.liao@trendnet.com

技術支援時間:
時間: 8:30AM - 6:00PM,週一到週五
中原標準時間 (假日除外)

Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDnet's website at <http://www.trendnet.com>

TRENDnet
3135 Kashiwa Street
Torrance, CA 90505
USA