



108Mbps 802.11g MIMO Wireless PC Card TEW-601PC

Designed to give you wider coverage, the MIMO 802.11g Wireless PC Card seamlessly connects to your wireless network without performance degradation. It also supports universal wireless connectivity with 802.11b or 802.11g networks, reaches speeds of up to 108Mbps, and secures wireless transmissions with either WPA or WEP encryption.

FEATURES

- Wi-Fi Compliant with IEEE 802.11a, 802.11g and IEEE 802.11b Standards
- Supports Ad-Hoc (Peer-to-Peer) Mode or Infrastructure (AP-Client) Mode
- Supports Super G Technology with Data Rate up to 108Mbps (8X Faster)
- Enhance Wireless Coverage with MIMO Technology of up to 800% More Coverage
- Dynamic Data Rate Scaling at 54, 48, 36, 24, 18, 12, 9 and 6Mbps for 802.11a/g
- Dynamic Data Rate Scaling at 11, 5.5, 2 and 1Mbps for 802.11b
- Maximum Reliability, Throughput and Connectivity with Automatic Data Rate Switching
- Compatible with Windows 2000/XP (SP1/SP2)/2003 Server
- Supports 64/128/152-bit WEP, WPA/WPA2 (AES/TKIP) and WPA-PSK/WPA2-PSK
- Low Interference and High Susceptibility Guarantee Reliable Performance
- Simple User Setup & Diagnostics Utilities
- 3-Year Warranty

BENEFITS

Economical:

Save Time, Labor, and Materials; Compare with Wired Network Installation

Flexible:

Creates wireless peer-to-peer network in Ad-Hoc mode or connects to Ethernet LAN in Infrastructure mode using Wireless Access Point or Wireless Router

Cost Effective:

Supports IEEE 802.11b and IEEE 802.11g Standards; Connects to any IEEE 802.11b/g wireless network

Performance:

108Mbps High Speed Wireless Connection and 800% More coverage

Note: Coverage and Speed performance might vary depending on the network environment.



108Mbps 802.11g MIMO Wireless PC Card

TEW-601PC

SPECIFICATIONS

Hardware	
Interface	• 32-Bit 3.3V CardBus Type II Card
Standards	• IEEE 802.11b and IEEE 802.11g
LED Indicator	• Power, Link
Power Consumption	• Receive Mode: 650mA(max) ; Transmit Mode: 680mA(max)
Supported OS	• Windows 2000/XP (SP1/SP2), 2003 Server
Dimensions (LxWxH)	• 114 x 54 x 3mm (4.3 x 2.1 x 0.13 inches)
Weight	• 40g (1.3oz)
Temperature	• Operating: 0° ~ 50° C (32° ~ 122° F) • Storage: -25° ~ 70° C (-13° ~ 158° F)
Humidity	• 10% ~ 90% max (Non-condensing)
Certification	• FCC, CE
Wireless	
Module Technique	• 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11a/g: OFDM with BPSK, QPSK and 16/64-QAM Sub-Carrier Mo
Antenna	• Built-in 4 PCB Antennas
Frequency	• 2.412 ~ 2.484 GHz
Media Access Protocol	• CSMA/CA
Data Rate (auto fallback)	• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps • 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps • Super G : 108Mbps
Output Power	• 802.11b: 18dBm (typical) • 802.11g: 16dBm (typical)
Receiving Sensitivity	• 802.11b: 11Mbps 10 ⁻⁵ BER @ -85 dBm (typical) • 802.11g: 54Mbps 10 ⁻⁵ BER @ -74 dBm (typical)
Encryption	• 64/128/152-bit WEP (Hex & ASCII), WPA/WPA2, WPA/WPA2-PSK
Channels	• 1~11 (US), 1~13 (EU)

NETWORKING SOLUTIONS

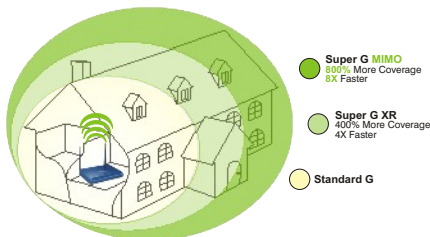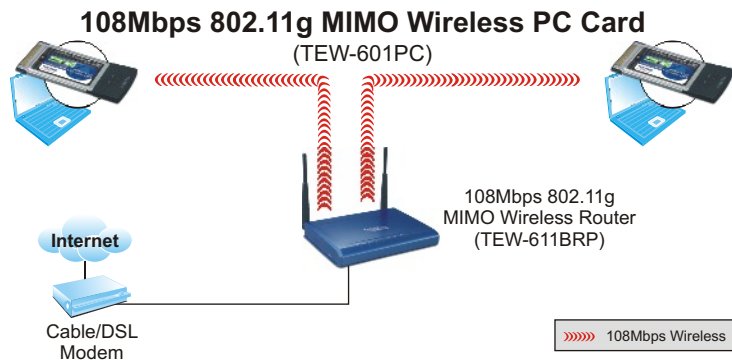

PACKAGE CONTENTS

- TEW-601PC
- Multi-Language Quick Installation Guide
- Utility & Driver CD-ROM

RELATED PRODUCTS

TEW-603PI	108Mbps 802.11g MIMO Wireless PCI Adapter
TEW-610APB	108Mbps 802.11g MIMO Wireless Access Point
TEW-611BRP	108Mbps 802.11g MIMO Wireless Router

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA
 Tel: 1-310-961-5500
 Fax: 1-310-961-5511
 Web: www.trendnet.com
 Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

