



Guia de Instalação Rápida



TK-V201S
TK-V401S
1.01

| | |
|--------------------------|---|
| Português | 1 |
| 1. Antes de Iniciar | 1 |
| 2. Como Instalar | 2 |
| | |
| Technical Specifications | 8 |
| Troubleshooting | 9 |




Conteúdo da Embalagem

- TK-V201S/TK-V401S
- Guia Multilíguas de Instalação Rápida
- Adaptador de Tensão (9V DC, 0.5A)
- 1 cabo VGA Macho-para-fêmea (1.2m/6ft)

Requisitos Mínimos do Sistema

- 2 Monitores VGA Compatíveis (TK-V201S) / 4 Monitores VGA Compatíveis (TK-V401S)
- Windows 7(32/64-bit)/Vista(32/64-bit)/XP(32/64-bit)/2000/2003 Server/Me/98SE
- Switch KVM (Opcional)

Conectando um único computador

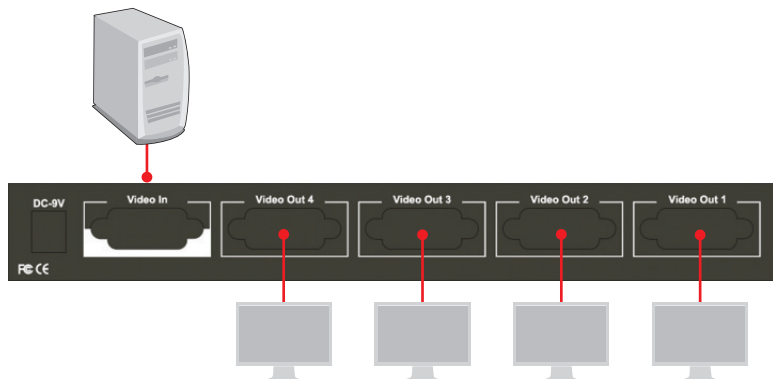

1. Desligue seu computador e seus monitores



2. Use o cabo VGA incluído para conectar seu computador à porta VIDEO IN no video splitter (TK-V401S mostrado).



Ao Computador



Ao Video Splitter



3. Conecte seu(s) monitor(es) a uma das portas VIDEO OUT no vídeo splitter.




4. Conecte o adaptador de tensão que vem incluído, ao vídeo splitter e em seguida a uma tomada elétrica.

5. Ligue seu computador e todos os monitores conectados.

6. Verifique se o LED Power está aceso.



Conectando ao Chaveador KVM

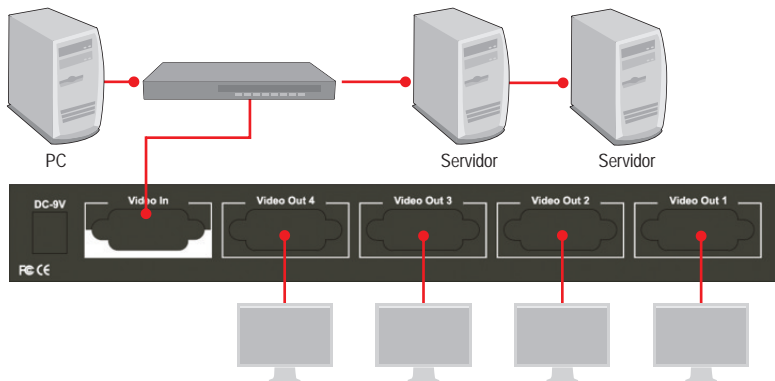

1. Conecte uma ponta do cabo VGA incluído à porta VIDEO IN do vídeo splitter (TK-V401S mostrado).



2. Conecte a ponta oposta do cabo VGA incluído à porta de Console no chaveador KVM.



Switch KVM

3. Conecte seu monitor a uma das portas VIDEO OUT no vídeo splitter.



4. Conecte o adaptador de tensão incluído ao vídeo splitter e em seguida a uma tomada elétrica.

5. Recorra ao Guia de Instalação Rápida de seu chaveador KVM para conectar seu computador ao chaveador KVM.

6. Ligue seus computador e seus monitores


7. Verifique se o LED Power está aceso.




Daisy Chain - Empilhamento

Nota:


1. Você somente pode empilhar o video splitter com outro TK-V201S ou TK-V401S.
2. Você pode empilhar até 4 splitters.

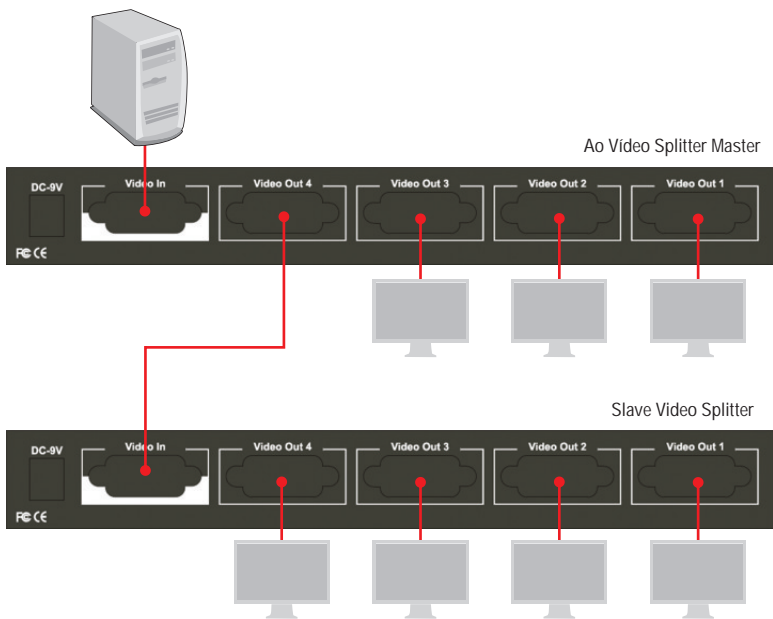

1. Use o cabo VGA incluído para conectar seu computador à porta VIDEO IN no primeiro (master) vídeo splitter (TK-V400S mostrado).

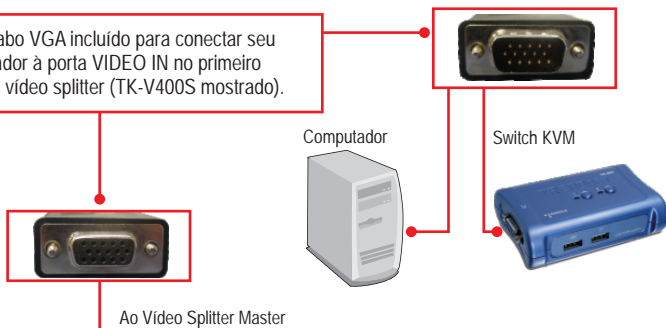

2. Conecte uma ponta de um segundo cabo VGA a uma das portas VIDEO OUT no primeiro (master) vídeo splitter.



3. Connect the opposite end of the second VGA cable to the VIDEO IN port on the second (slave) video splitter.



4. Se você tiver um terceiro video splitter, conecte uma ponta do cabo VGA à porta VIDEO OUT do segundo video splitter. Então conecte a ponta oposta deste cabo à porta VIDEO IN do terceiro (slave) video splitter. Repita para cada video splitter adicional.

5. Conecte seu(s) monitor(es) a uma das portas VIDEO OUT no vídeo splitter.



6. Conecte o adaptador de tensão que vem incluído a cada video splitter e em seguida a uma tomada elétrica.

7. Verifique se o LED Power está aceso.



Sua instalação está completa.

Registre Seu Produto

Para garantir o alto nível do serviço e suporte ao consumidor, por favor tire um minuto para registrar seu produto Online em: www.trendnet.com/register Agradecemos por ter escolhido TRENDnet

| Hardware | | |
|--------------------------|----------|--|
| Video Input | | 1 x USB keyboard Type A |
| Video Output | TK-V201S | 2 x 15-pin VGA HDB Female |
| | TK-V401S | 4 x 15-pin VGA HDB Female |
| Resolution | | 1920 x 1440 Max. |
| Signal Distance | | WUXGA, HD, UXGA, SXGA+, SXGA, WSXGA, WXGA, XGA, SVGA, VGA, QVGA, and Multisync supported |
| Cable Distance | | 65 m (210 ft.) max. |
| Daisy-Chain (Cascade) | | Up to 3 levels |
| Cables (included) | | 1 x 15-pin VGA cable (male to female), 1.2 m (4 ft.) |
| Power | | 9V DC, 0.5A |
| LEDs | | Power |
| Dimension (L x W x H) | TK-V201S | 131 x 65 x 26mm (6.3 x 2.5 x 1in.) |
| | TK-V401S | 205 x 65 x 26 mm (8 x 2.5 x 1 in.) |
| Weight | TK-V201S | 200g (7.05oz) |
| | TK-V401S | 400g (14.1oz) |
| Temperature | | Operation: 0°C~40°C (32°F~104°F) Storage: -20°C~60°C (-4°F~140°F) |
| Humidity | | 0~90% non-condensing |
| Certifications | | CE, FCC |

1. Meus monitores e meu PC estão ligados, mas eu ainda não consigo ver nada em meus monitores?

1. Verifique se tudo está conectado adequadamente. Veja seção 2.
2. Verifique se o adaptador de tensão está conectado ao vídeo splitter.
3. Verifique se o LED Power está aceso
4. Tente conectar o monitor em outra porta Video OUT.
5. Seu monitor pode estar com defeito. Tente outro monitor no vídeo splitter.

2. O vídeo splitter suporta adaptador DVI?

O vídeo splitter não suporta adaptadores VGA-para-DVI.

3. Quantos vídeo splitters eu posso empilhar?

Você pode empilhar até 4 vídeo splitters.

4. O vídeo splitter suporta vídeo estendido?

O vídeo splitter não suporta vídeo estendido, apenas modo clone.

Se você ainda encontrar problemas ou tiver alguma dúvida referente ao TK-V201S/TK-V401S, favor entrar em contato com o Departamento de Suporte Técnico da Trendnet.

Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

TK-V201S/TK-V401S - 2 Years Limited Warranty

AC/DC Power Adapter, Cooling Fan and Power Supply carry a 1 year limited warranty

If a product does not operate as warranted during the applicable warranty period, TRENDnet shall reserve the right, at its expense, to repair or replace the defective product or part and deliver an equivalent product or part to the customer. The repair/replacement unit's warranty continues from the original date of purchase. All products that are replaced become the property of TRENDnet. Replacement products may be new or reconditioned. TRENDnet does not issue refunds or credit. Please contact the point-of-purchase for their return policies.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet within the applicable warranty period and providing a copy of the dated proof of the purchase. Upon proper submission of required documentation a Return Material Authorization (RMA) number will be issued. An RMA number is required in order to initiate warranty service support for all TRENDnet products. Products that are sent to TRENDnet for RMA service must have the RMA number marked on the outside of return packages and sent to TRENDnet prepaid, insured and packaged appropriately for safe shipment. Customers shipping from outside of the USA and Canada are responsible for return shipping fees. Customers shipping from outside of the USA are responsible for custom charges, including but not limited to, duty, tax, and other fees.

WARRANTIES EXCLUSIVE: IF THE TRENDNET PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDNET'S OPTION, REPAIR OR REPLACE. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDNET NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDNET'S PRODUCTS.

TRENDNET SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDNET ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATE, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDNET'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

Some TRENDnet products include software code written by third party developers. These codes are subject to the GNU General Public License ("GPL") or GNU Lesser General Public License ("LGPL").

Go to <http://www.trendnet.com/gpl> or <http://www.trendnet.com> Download section and look for the desired TRENDnet product to access to the GPL Code or LGPL Code. These codes are distributed WITHOUT WARRANTY and are subject to the copyrights of the developers. TRENDnet does not provide technical support for these codes. Please go to <http://www.gnu.org/licenses/gpl.txt> or <http://www.gnu.org/licenses/lgpl.txt> for specific terms of each license.

PWP05202009v2

Certifications

This equipment has been tested and found to comply with FCC and CE Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received. Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with you Local Authority or Retailer for recycling advice.



NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

ADVERTENCIA

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.



Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDnet's website at <http://www.trendnet.com/register>