



Lühike paigaldusjuhend



TK-V201S  
TK-V401S  
1.01

Eesti	1
1. Enne alustamist	1
2. Riistvara paigaldamine	2
.....	
Technical Specifications	8
Tõrkeotsing	9




## Pakendi sisu

- TK-V201S/TK-V401S
- Mitme keelne lühike paigaldusjuhend
- Toiteplokk (9V DC, 0.5A)
- 1 x VGA Isa-Ema kaabel (1.2m/6ft)

## Minimaalsed nõuded süsteemile

- 2 x VGA ühilduvat monitori (TK-V201S) / 4 x VGA ühilduvat monitori
- Windows 7(32/64-bit)/Vista(32/64-bit)/XP(32/64-bit)/2000/2003 Server/Me/98SE
- KVM Switch (täiendavalt)

### Ühendamine ühe arvutiga

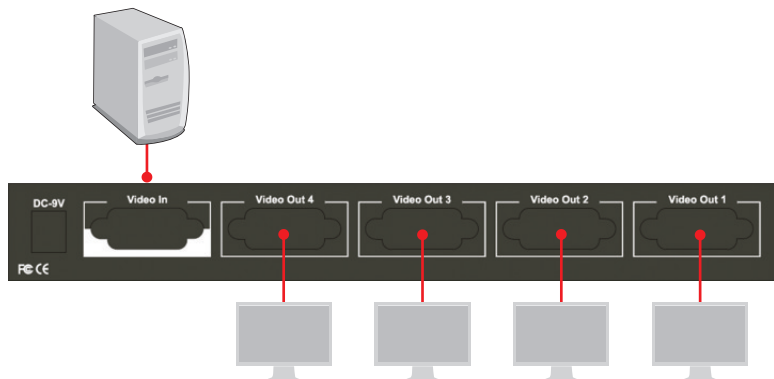

1. Lülitage välja oma arvuti ja monitorid.



2. Kasutage kaasasolevat VGA kaablit, et ühendada teie arvuti video jagajaga (näites TK-V401S) VIDEO IN porti.



Arvutisse



Video jagajasse



3. Ühendage oma monitor(id) jagaja suvalisse VIDEO OUT porti.




4. Ühendage kaasasolev toitekaabel video jagajaga ja siis ühendage seinapessa.

5. Lülitage sisse nii oma arvuti kui monitor(id).

6. Veenduge, et Power LED helendab.



## Ühendamine KVM Switchiga

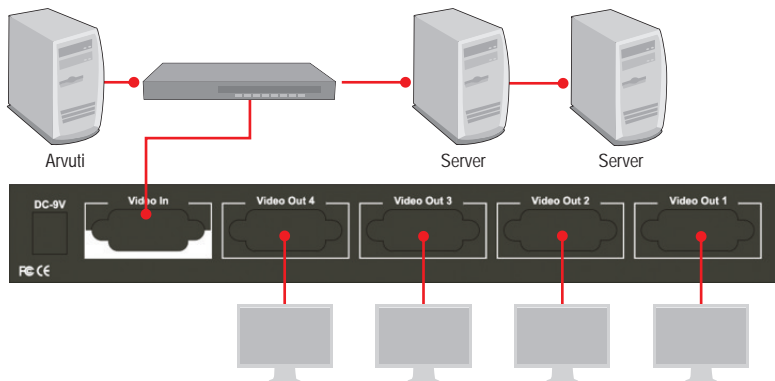

1. Ühendage kaasasoleva VGA kaabli üks ots VIDEO IN video jagaja porti (näites TK-V401S).



2. Teine VGA kaablipool ühendage KVMi konsooli porti.



KVM switch

3. Ühendage oma monitorid jagaja suvalisse VIDEO OUT porti.



4. Ühendage kaasasolev toitekaabel video jagajaga ja siis ühendage seinapessa.

5. Tutvuge oma KVM switchi kasutusjuhendiga, kuidas ühendada teie arvuti KVM switchiga.

6. Lülitage sisse nii oma arvuti kui monitorid.


7. Veenduge, et Power LED helendab.




## Stäkkimine

### Märkus:

1. Te saate stäkkida video jagajat läbi teise TK-V201S või TK-V401S.
2. Te saate stäkkida kuni 4 jagajat.

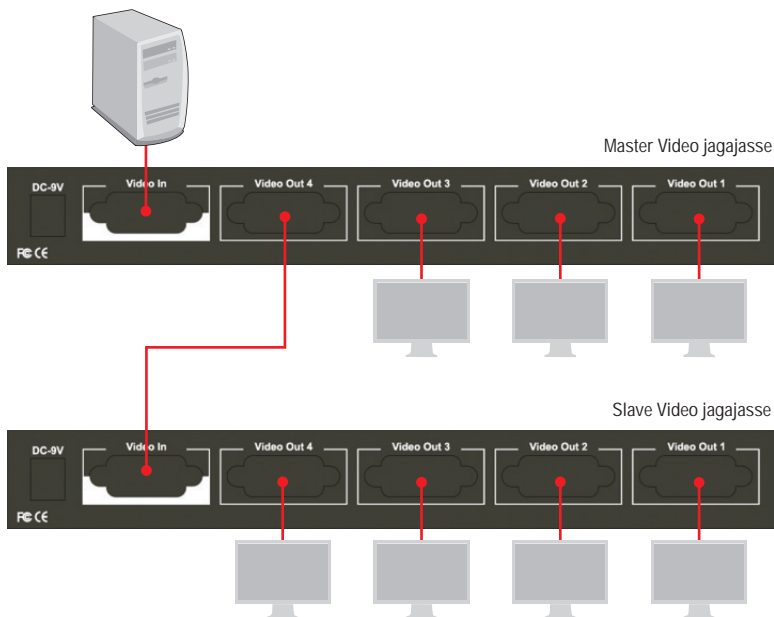

1. Ühendage kaasasolev VGA kaabli üks ots teie arvutist või KVM switchist esimese (master) video jagaja VIDEO IN porti (näites TK-V401S).

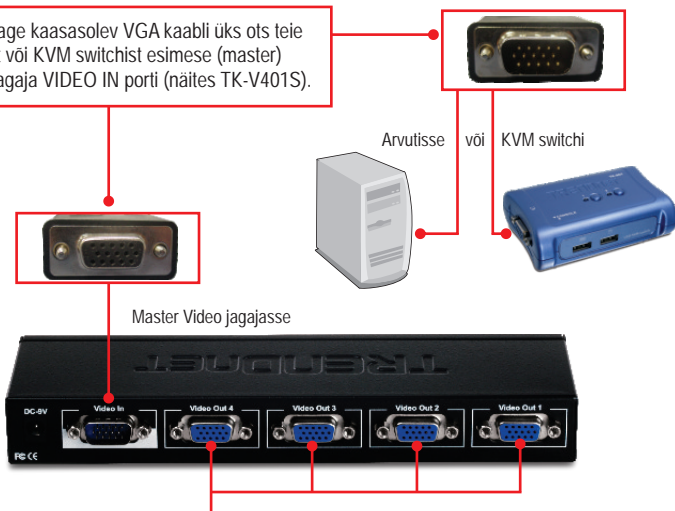

2. Ühendage järgmise VGA kaabli üks ots esimese (master) video jagaja VIDEO OUT pordiga.



3. VGA kaabli teine pool ühendage järgmissesse (slave) video jagaja VIDEO IN porti.





4. Kui teil on kolm video jagajat, ühendage VGA kaabli üks pool teise jagaja VIDEO OUT porti ja teine VGA kaabli ots ühendage kolmanda jagaja VIDEO IN porti. Korrake sedasi iga täiendava jagajaga

5. Ühendage oma monitorid jagaja suvalisse VIDEO OUT porti.



6. Ühendage kaasasolev toitekaabel video jagajaga ja siis ühendage seinapessa.

7. Veenduge, et Power LED helendab.



## Paigaldus on lõppenud

### Teie seadmete registreerimine

Et kindlustada teid parima teeninduse ja toega, palun leidke moment, et registreerida teie toode OnLines [www.trendnet.com/register](http://www.trendnet.com/register) Täname, et te valisite TRENDnet'i.

Hardware		
Video Input		1 x USB keyboard Type A
Video Output	TK-V201S	2 x 15-pin VGA HDB Female
	TK-V401S	4 x 15-pin VGA HDB Female
Resolution		1920 x 1440 Max.
Signal Distance		WUXGA, HD, UXGA, SXGA+, SXGA, WSXGA, WXGA, XGA, SVGA, VGA, QVGA, and Multisync supported
Cable Distance		65 m (210 ft.) max.
Daisy-Chain (Cascade)		Up to 3 levels
Cables (included)		1 x 15-pin VGA cable (male to female), 1.2 m (4 ft.)
Power		9V DC, 0.5A
LEDs		Power
Dimension (L x W x H)	TK-V201S	131 x 65 x 26mm (6.3 x 2.5 x 1in.)
	TK-V401S	205 x 65 x 26 mm (8 x 2.5 x 1 in.)
Weight	TK-V201S	200g (7.05oz)
	TK-V401S	400g (14.1oz)
Temperature		Operation: 0°C~40°C (32°F~104°F) Storage: -20°C~60°C (-4°F~140°F)
Humidity		0~90% non-condensing
Certifications		CE, FCC

1. Mu monitorid ja PC on sisselülitatud, kuid ma ei näe midagi mu monitoridest
  1. Veenduge, et teil on kõik õigesti ühendatud. Vaadake seksiooni 2.
  2. Veenduge, et toiteplokk on ühendatud video jagajaga.
  3. Veenduge, et Power LED helendab.
  4. Proovige monitor ühendada teise Video OUT porti.
  5. Teie monitor võib olla vigane. Proovige jagajaga ühendada mõnda teist monitори.
2. Kas antud jagaja toetab ka DVI adapterit?  
Antud video jagaja ei toeta DVI-VGA adaptereid.
3. Mitu video jagajat saab järjestikku ühendada?  
Te saate järjestikku ühendada kuni 4 video jagajat.
4. Kas antud video jagaja toetab ka laiendatud töölauda (extended desktop)?  
Antud video jagaja ei toeta laiendatud töölauda. Antud video jagaja toetab vaid kloonimist.

Kui Teil esineb endiselt probleeme või on küsimusi TK-V201S/TK-V401S kohta, võtke palun ühendust TRENDnet'i tehnilise toe osakonnaga.

## Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

### TK-V201S/TK-V401S - 2 Years Limited Warranty

AC/DC Power Adapter, Cooling Fan and Power Supply carry a 1 year limited warranty

If a product does not operate as warranted during the applicable warranty period, TRENDnet shall reserve the right, at its expense, to repair or replace the defective product or part and deliver an equivalent product or part to the customer. The repair/replacement unit's warranty continues from the original date of purchase. All products that are replaced become the property of TRENDnet. Replacement products may be new or reconditioned. TRENDnet does not issue refunds or credit. Please contact the point-of-purchase for their return policies.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet within the applicable warranty period and providing a copy of the dated proof of the purchase. Upon proper submission of required documentation a Return Material Authorization (RMA) number will be issued. An RMA number is required in order to initiate warranty service support for all TRENDnet products. Products that are sent to TRENDnet for RMA service must have the RMA number marked on the outside of return packages and sent to TRENDnet prepaid, insured and packaged appropriately for safe shipment. Customers shipping from outside of the USA and Canada are responsible for return shipping fees. Customers shipping from outside of the USA are responsible for custom charges, including but not limited to, duty, tax, and other fees.

WARRANTIES EXCLUSIVE: IF THE TRENDNET PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDNET'S OPTION, REPAIR OR REPLACE. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDNET NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDNET'S PRODUCTS.

TRENDNET SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDNET ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATE, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDNET'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

Some TRENDnet products include software code written by third party developers. These codes are subject to the GNU General Public License ("GPL") or GNU Lesser General Public License ("LGPL").

Go to <http://www.trendnet.com/gpl> or <http://www.trendnet.com> Download section and look for the desired TRENDnet product to access to the GPL Code or LGPL Code. These codes are distributed WITHOUT WARRANTY and are subject to the copyrights of the developers. TRENDnet does not provide technical support for these codes. Please go to <http://www.gnu.org/licenses/gpl.txt> or <http://www.gnu.org/licenses/lgpl.txt> for specific terms of each license.

PWP05202009v2

Sertifikaadid:

Seade on testitud ning vastab FCC ja CE reeglitele.

Seade vastab järgmistele tingimustele:

(1) Seade ei tohi põhjustada ohtlikke häireid.

(2) Seade peab võtma vastu kõiki signaale, sealhulgas signaale, mis võivad põhjustada soovimatuid häireid seadme töös.



Elektri- ja elektroonikatoodete jäätmeid ei tohi ära visata koos olmejäätkeidega. Abivahendite olemasolu korral palume ümbertöötlemiseks sorteerida. Jäätmete ümbertöötlemise kohta küsige nõu oma kohalikul jaemuujalt.



**MÄRKUS:** TOOTJA EI VASTUTA ÜHEGI TV VÕI RAADIO HÄIRE EEST, MIS ON PÕHJUSTATUD SEADME LUBAMATUST ÜMBEREHITAMISEST. IGASUGUNE ÜBERMODIFITSEERIMINE TÜHISTAB AUTORIVASTUTUSE SEADMELE.



## Product Warranty Registration

Please take a moment to register your product online.  
Go to TRENDnet's website at <http://www.trendnet.com/register>