



TEW-P1U Wireless Print Server with 1 USB Printer Port

TRENDnet TEW-P1U is a print server that transforms virtually all stand-alone USB printer into a shared network printer. The TEW-P1U provides IEEE 802.11b 11Mbps wireless interface for integrating into existing wireless network. The TEW-P1U is designed for printers equipped with USB 2.0 compliant printer port and it is an ideal network solution to convert conventional USB printer into a shared resource on the network. Network professionals can easily manage the print server using Web Browser or Windows-Based software and utilize the TEW-P1U to promote productivity in a workgroup environment with low equipment cost.



FEATURES

- Compliant with IEEE 802.11b 11Mbps Wireless LAN standard
- One USB printer port, compliant with USB 2.0 and USB 1.1 standards
- Supports Ad-Hoc or Infrastructure wireless mode
- 64/128-bit Wired Equivalent Privacy (WEP) encryption
- Supports TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB and IPP network protocols
- DHCP client
- Supports Windows 95/98/Me/NT4.0/2000/XP, Mac OS 8.1 or higher, Unix/Linux, and NetWare (Bindery/NDS)
- Supports SNMP & HP Web JetAdmin
- 2MB System Memory and 1 MB Flash Memory
- Supports bi-directional Communication
- Easy setup with Web Browser or Windows-Based administrative program
- Diagnostic DIP switch and Reset button
- Upgradeable firmware
- Compact pocket size
- 3-year warranty

BENEFITS

- **Integration Friendly:**
Supports TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB (over IP) protocols and all popular operating systems.
- **Flexible:**
Works in Ad-Hoc Wireless LAN mode or in Infrastructure Wireless LAN Mode and you can install the Print Server anywhere in the network.
- **Cost Effective:**
Go wireless; save time, space and money for laying network cables.
- **Performance:**
Up to 11Mbps bandwidth for wireless network.



TEW-P1U

Wireless Print Server with 1 USB Printer Port

SPECIFICATIONS

Wireless Standard:

- IEEE 802.11b 11Mbps 2.4GHz DSSS ISM band

Wireless Mode:

- Ad-Hoc and Infrastructure

Wireless Encryption:

- 64/128-bit WEP

Wireless Data Rate:

- 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps (auto-fallback)

Wireless Channels:

- 11 Channels (US/Canada)

Antenna:

- 2 dBi Internal Antenna

Radio Power Output:

- 13 ~ 17 dBm (typical 15dBm)

Printer Interface:

- USB 2.0 and USB 1.1 compliant up to 12 Mbps

Supported Protocols:

- TCP/IP, IPX, NetBEUI, AppleTalk, LPR and SMB (over IP) and IPP

LED Indicator:

- Status, WLAN

Power:

- 3.3V DC / 2A, External Power Adapter

Dimensions (LxWxH):

- 70 x 60 x 27 mm (2.76 x 2.36 x 1.06 inches)

Weight:

- 46 g. (1.6 Oz.)

Temperature:

- Operating: 0° ~ 50°C (32° ~ 122°F)
- Storage Temperature: -5° ~ 65°C (23° ~ 149°F)

Humidity:


- Operating: 0% ~ 70%
- Storage: 0% ~ 80%

Emission:

- FCC class B, CE class B



NETWORKING SOLUTIONS

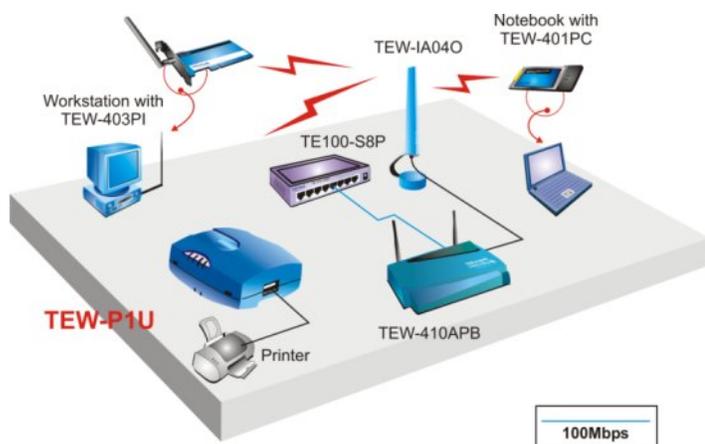

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- ➔ **TEW-P1P:** 11Mbps Wireless 1 Parallel Port Print Server
- ➔ **TEW-P1U:** 11Mbps Wireless 1 USB Port Print Server
- ➔ **TEW-P1U1P:** 11Mbps Wireless 1 USB + 1 Parallel Port Print Server
- ➔ **TE100-PS1U:** 10/100Mbps 1 USB Port Print Server
- ➔ **TE100-P2U1P:** 10/100Mbps 2 USB + 1 Parallel Port Print Server
- ➔ **TE100-PS1plus:** 10/100Mbps 1-Parallel Port Print Server
- ➔ **TE100-PS3plus:** 10/100Mbps 3-Parallel Port Print Server

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: www.TRENDNET.com

Email: sales@trendware.com

