



## 4-Port PS/2 KVM Switch Kit with Audio TK-408K (v1.2R)

The 4-Port PS/2 Audio KVM Switch lets you control multimedia PCs with just one keyboard, monitor, mouse, microphone, and a set of speakers. The KVM switch not only allows you to share your monitor, keyboard and mouse but you can also share microphone and speakers. With just a simple press of a button, this KVM switch eliminates the hassle of cable swapping and switching between 4 PCs. With its Hot-Plug, Auto-Scan and Hot-Key operating features, the TK-408K is the perfect choice for managing 4 PCs. Separate KVM cables are included.

## FEATURES

- Manage up to 4 computers/servers with one set of console devices
- PS/2 keyboard/mouse emulation with 4 sets of detachable KVM cables
- Compliant with Windows 98(SE)/ME/2000/XP/2003 Server/Vista and Linux
- High video quality, up to 2048 x 1536 resolution
- Listen to music from one computer while working on the other
- Auto-Scan and LED display for easy status monitoring
- Computer selection by face panel push buttons or keyboard hot key commands
- Keyboard status restored when switching between computers
- Plug & Play and hot-pluggable
- 2-year limited warranty



## SPECIFICATIONS


HARDWARE	
<b>Connections</b>	<ul style="list-style-type: none"><li>• 4 computers</li></ul>
<b>Cables</b>	<ul style="list-style-type: none"><li>• 2 sets of 1.2m (4ft.) PS/2 KVM cables, 2 sets of 1.8m (6ft.) PS/2 KVM cables</li><li>• 2 sets of 1.2m (4ft.) audio cable, 2 sets of 1.8m (6ft.) audio cable</li></ul>
<b>Cable Interface (all male)</b>	<ul style="list-style-type: none"><li>• To KVM<ul style="list-style-type: none"><li>• 1 x VGA/SVGA HDB 15-pin</li><li>• 1 x 3.5mm speaker jack</li><li>• 1 x 3.5mm microphone jack</li></ul></li><li>• To Computer<ul style="list-style-type: none"><li>• 1 x PS/2 keyboard 6-pin mini din</li><li>• 1 x PS/2 mouse 6-pin mini din</li><li>• 1 X VGA/SVGA HDB 15-pin</li><li>• 1 x 3.5mm speaker jack</li><li>• 1 x 3.5mm microphone jack</li></ul></li></ul>
<b>PC Port Connections (all female)</b>	<ul style="list-style-type: none"><li>• 4 x VGA/SVGA HDB 15-pin</li><li>• 4 x 3.5mm speaker jack</li><li>• 4 x 3.5mm microphone jack</li></ul>
<b>Console Port Connectors (all female)</b>	<ul style="list-style-type: none"><li>• 1 x PS/2 keyboard 6-pin mini din</li><li>• 1 x PS/2 mouse 6-pin mini din</li><li>• 1 x VGA/SVGA HDB 15-pin</li><li>• 1 x 3.5mm speaker jack</li><li>• 1 x 3.5mm microphone jack</li></ul>
<b>Computer Selection</b>	<ul style="list-style-type: none"><li>• Front panel push buttons or keyboard hot key commands</li></ul>
<b>Auto-Scan Interval</b>	<ul style="list-style-type: none"><li>• 5 seconds</li></ul>
<b>Keyboard State</b>	<ul style="list-style-type: none"><li>• Save and restore</li></ul>
<b>Power Type</b>	<ul style="list-style-type: none"><li>• PS/2 interface power</li></ul>
<b>Dimensions</b>	<ul style="list-style-type: none"><li>• 167 x 80 x 28mm (6.6 x 3.2 x 1.1in.)</li></ul>
<b>Weight</b>	<ul style="list-style-type: none"><li>• 178g (6.3oz.)</li></ul>
<b>Temperature</b>	<ul style="list-style-type: none"><li>• Operating: 0°C ~ 40°C (32°F ~104°F)</li><li>• Storage: -20°C ~ 60°C (-4°F ~140°F)</li></ul>
<b>Humidity</b>	<ul style="list-style-type: none"><li>• 0%~90%, non-condensing</li></ul>
<b>Certifications</b>	<ul style="list-style-type: none"><li>• CE, FCC</li></ul>

# 4-Port PS/2 KVM Switch Kit with Audio

TK-408K [v1.2R]



## NETWORKING SOLUTIONS

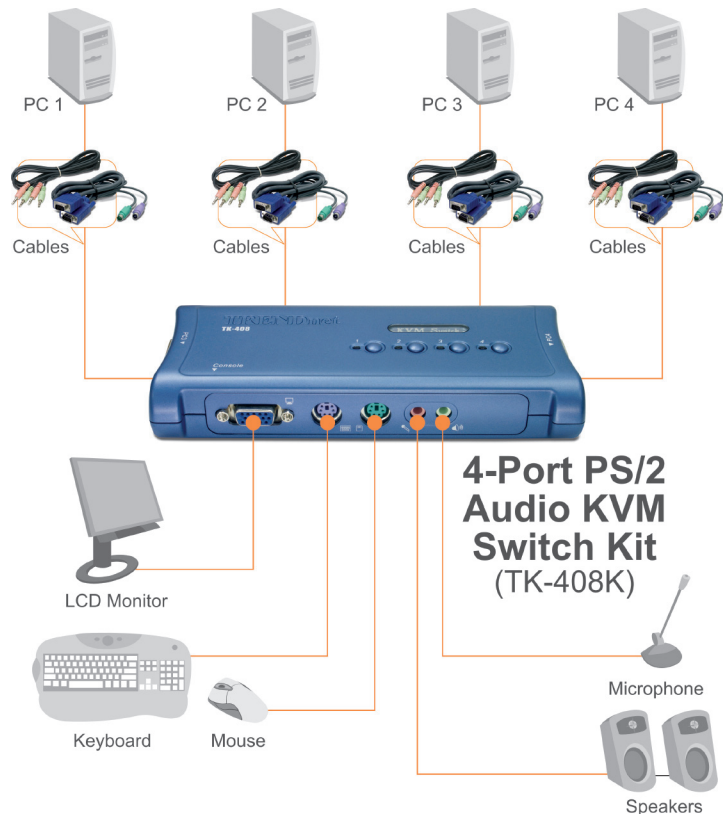

## PACKAGE CONTENTS

TK-408K

Multi-Language Quick Installation Guide

4 sets of PS/2 KVM Cable (2 x 1.2m/4ft., 2 x 1.8m/6ft.)

4 sets of audio Cable (2 x 1.2m/4ft., 2 x 1.8m/6ft.)

## RELATED PRODUCTS

<b>TK-208K</b>	2-Port PS/2 KVM Switch Kit w/ Audio
<b>TK-407K</b>	4-Port USB KVM Switch Kit
<b>TK-409K</b>	4-Port USB KVM Switch Kit with Audio

## CONTACT INFORMATION

**TRENDnet**

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

**1-888-326-6061**

