



CompactFlash 56K Fax Modem Card TFM-CF56

TRENDnet's TFM-CF56 CompactFlash 56K Fax Modem Card is the latest in communication innovation. Designed with an integrated RJ-11 connector for telephone line connection, this CompactFlash Fax Modem is the easiest and fastest way to connect to the Internet. Designed for Pocket PC / Windows CE-base palm sized hand-held PCs, you can just insert the card and then dial-up to ISP for accessing Internet and e-mails. With the "Hot Swap" option, TRENDnet's TFM-CF56 provides easy installation and configuration for your dial-up applications.

FEATURES

- Small form factor integrates into mobile and handheld platforms
- XpressPort design, with integrated RJ11 phone connector into the card. No moving parts to break and no media coupler to lose
- Complies with CF+/CompactFlash Rev. 1.4
- Support Windows CE2.0/ 3.0(Pocket PC 2002)/ 4.0(Pocket PC 2003)
- Plug and Play device for easy installation and configuration
- "Hot Swap" card insertion and removal
- Low power consumption with 3.3V operation
- Auto-step downward compatibility for connection
- 3 Year Warranty

BENEFITS

User Friendly:

Easy installation with "Hot-Swap" card insertion and removal.

Economical:

Xpress Port design that integrates RJ11 phone connector into the card. No moving parts to break and no media coupler to lose.

Flexible:

Supports most modem/Fax standards and negotiates connection speed between 300bps and 56Kbps.

Performance:

Surfs the Internet with speed up to 56Kbps


CompactFlash 56K Fax Modem Card

TFM-CF56

SPECIFICATIONS

Hardware	
Card Type	• CF+ / CompactFlash Rev. 1.4
Modem Standards	• Hayes AT Command Set, V.90, K56Flex, V.34+, V.34, V.32bis, V.32, V.23, V.22bis, V.22/Bell 212A, V.21/Bell 103
Fax Standards	• Group III, V.29, V.27ter, V.21 Channel 2, V.17, EIA Class 1 Commends
Error Control	• Group III, V.29, V.27ter, V.21 Channel 2, V.17, EIA Class 1 Commends
Data Compression	• V.42bis, MNP 5
Dialing Methods	• Tone and Pulse
Operation Modes	• Asynchronous, Full Duplex, Automatic and Manual Call Originate, Automatic and Manual Answer
Power Consumption	• Active Mode: 140mA • Sleep Mode: 90mA
Dimensions (W x H x D)	• 88 x 42 x 15 mm (3.46 x 1.65 x 0.59 inch)
Temperature	• Operating: 0° - 55° C (32° - 131° F) • Storage: -25° - 70° C (-13° - 158° F)
Humidity	• 10% - 90% (no-condensing)
Certifications	• FCC Class B, CE

NETWORKING SOLUTIONS

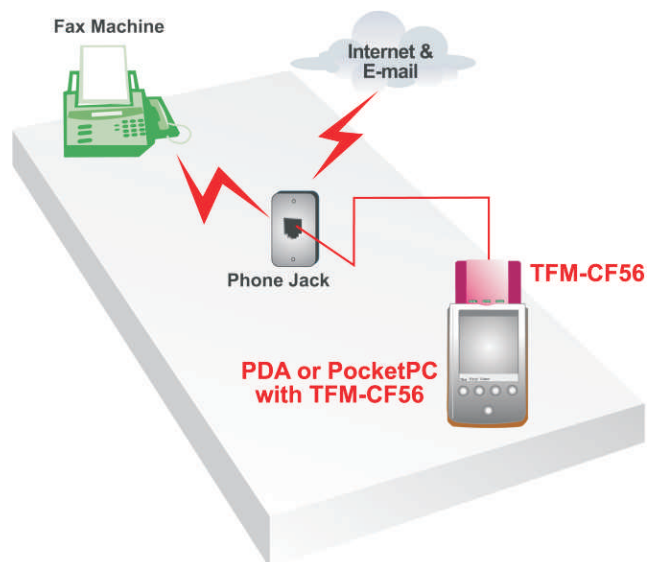

ORDERING INFORMATION

TRENDnet

3135 Kashiwa Street, Torrance, CA 90505 USA

Tel: 1-310-891-1100

Fax: 1-310-891-1111

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

