


## Firmware Upgrade Procedure


1. Save the downloaded firmware file (.zip) to your PC
2. Right click on the downloaded file and select **Extract All** or **Extract Here** option
  - a. Make sure to remember the location where the extracted file will be saved.
3. Log into to the switch configuration page  
Default URL/IP address <http://192.168.10.200>  
Default User Name: admin      Default Password: admin
4. (Old UI) Navigate to the **Management** section, click on **Maintenance**, and click on **Firmware**.  
(New UI) Navigate to **Tools** section and click on **Firmware**.
5. Under the **Upgrade Firmware** section, click **Browse** or **Choose File** and select firmware file (.fw) from the extracted files and click the **Upgrade** button to start the firmware upgrade process.

### Old UI

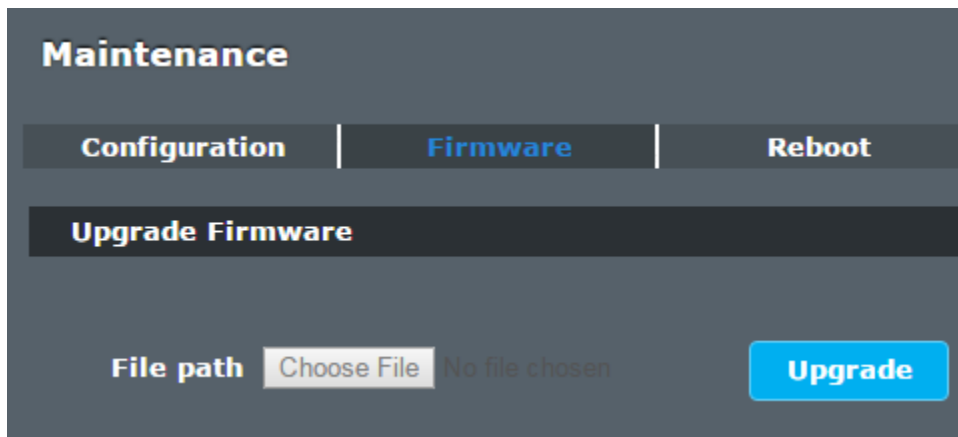

The screenshot shows the 'Maintenance' section of the Old UI. It has three tabs: 'Configuration', 'Firmware' (which is selected), and 'Reboot'. Below the tabs is a section titled 'Upgrade Firmware'. At the bottom, there is a 'File path' label, a 'Choose File' button, the text 'No file chosen', and a blue 'Upgrade' button.

### New UI



The screenshot shows the 'Firmware Upgrade' page of the New UI. It has a header 'Firmware Upgrade' and a sub-header 'Image Select'. Below this is a 'Firmware File' label, a 'Choose File' button, and the text 'No file chosen'. There is a blue 'Upgrade' button. At the bottom, there is a note: 'Note: System will reboot automatically after burning image to flash.'

6. Wait until the firmware upload has completed and the device reboots.
7. The firmware upgrade is complete.