



## 2-Port 4K HDMI KVM Switch

TK-216i (v1.0R)


- Control two computers with one set of console controls
- Works with displays with an HDMI port
- Supports 4K UHD resolutions up to 3840 x 2160 @ 60Hz
- HDMI 5.1 audio support
- 3.5mm speaker and microphone connections for analog audio
- Fully integrated HDMI, USB, and audio cables
- USB powered – No external power adapter required
- Convenient computer toggle switch
- No CD installation required

TRENDnet's 2-Port 4K HDMI KVM Switch, model TK-216i, allows you to control two computers with one set of console controls. Experience up to 4K UHD resolutions, no driver installation required. The TK-216i 4K HDMI KVM switch is designed for 4K HDMI systems with USB mouse and keyboard connections. This 4K HDMI KVM switch also features 3.5mm speaker and microphone connections to switch between computers.




### 4K HDMI 2.0

The 4K HDMI KVM Switch is designed for HDMI systems with resolutions up to 4K UHD (3840 x 2160 @ 60Hz).



### Audio Support



Full audio support through HDMI cable connections with optional 3.5mm microphone and speaker jacks.



### Quick Toggle Switch

Use the integrated 1.2m (3.9 ft.) cable to position the toggle switch in the most convenient location.

## NETWORKING SOLUTION

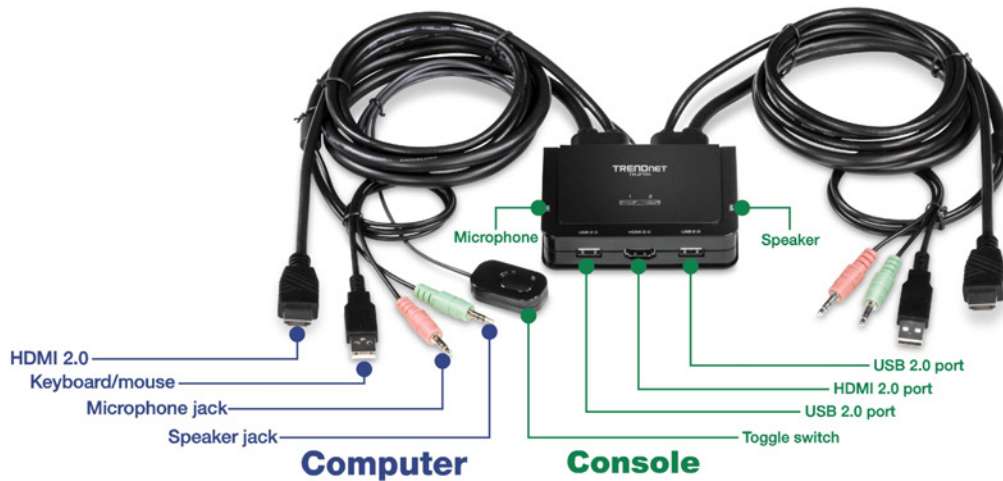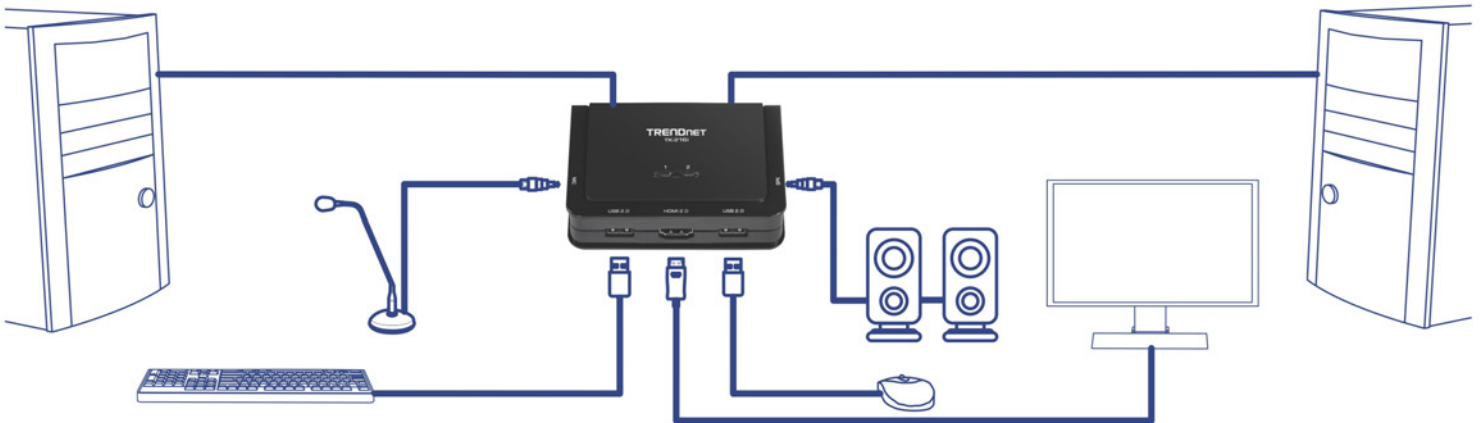

## FEATURES



**Computers**  
Control up to 2 computers



**4K UHD**  
4K HDMI KVM switch supports resolutions up to 4K UHD (3840 x 2160) with a 60Hz refresh rate



**Audio Support**  
Full audio support maximizes workstation productivity



**USB Mouse & Keyboard**  
True Transparent USB (TTU) technology supports most keyboard and mouse designs



**HDMI Display**  
HDMI 2.0 with HDCP support



**Integrated Cables**  
Fully integrated HDMI, USB, and audio cables



**Computer Ports**  
Requires free USB and HDMI ports from connected computers



**Hot Keys**  
4K HDMI KVM switch features Hot Key command shortcuts

## SPECIFICATIONS

### Console Port Connectors

- Keyboard: USB 2.0
- Mouse: USB 2.0
- Monitor: HDMI 2.0
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### Computer Interface (up to 2)

- Keyboard/mouse: USB 2.0 type A
- Monitor: HDMI 2.0
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm
- Cable length: 1.2m (3.9 ft.)

### Monitor Resolution

- 3840 x 2160 @ 60Hz

### Audio Support

- 5.1 Audio support over HDMI cables
- Analog audio over speaker and microphone jacks

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 90 % non-condensing

### Dimensions

- Unit: 97 x 83 x 25mm (3.8 x 3.3 x 1 in.)
- Integrated cables: 1.2m (3.9 ft.)

### Weight

- 426g (15 oz.)

### Warranty

- 2 year

### Certifications

- CE
- FCC

### Package Contents

- TK-216i
- Quick Installation Guide

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.