



4-Port USB KVM Switch Kit with Audio TK-409K

The 4-Port USB KVM Switch with Audio lets you manage 4 computers with just one set of keyboard, monitor, mouse, and a set of speakers/Microphone. The device comes with 4 sets of USB KVM and Audio cables, no additional equipment required. Its compact size makes it ideal for home and business environment.

FEATURES

- Use one keyboard, monitor, and mouse to control two computers
- 4-port USB KVM Switch with 1 set of Mic/Speaker port.
- 4 sets of VGA and 4 sets of Audio & Microphone Cables
- Supports Microsoft IntelliMouse, Optical Mouse, Logitech Net Mouse and more
- Supports super High Video Quality, up to 2048 x 1536 VGA resolution
- Supports Windows 98(SE)/ME/2000/XP/2003 Server, Linux, and Mac OS
- Multi-Platform supports for PCs, Macintosh G3/G4, iMac and Mac Mini
- Auto-Scan & LED display for PCs monitoring
- Hot-Key, push button and Windows-based client switching software
- User definable hot-key (Windows Only)
- Plug & Play and Hot-Pluggable
- USB Interface Power method
- 2-Year Warranty


4-Port USB KVM Switch Kit with Audio

TK-409K

SPECIFICATIONS

Hardware	
Management	• 4 computers
USB Interface	• USB 1.1 Specifications Compliant
KVM Cable	• 4 Sets of 1.2M (4ft) KVM Cables • 4 Sets of Audio/Microphone Cables (USB mini B to 3.5mm Jack)
Cable Interface	<ul style="list-style-type: none"> • KVM: <ul style="list-style-type: none"> – To KVM: 1 x VGA/SVGA HDB 15-pin (male) – To PC: 1 x USB (Type A), 1 x VGA/SVGA HDB 15-Pin (male) • Audio: <ul style="list-style-type: none"> – To KVM: 1 x 3.5mm audio in/out jack, 1 x 3.5mm microphone in/out jack – To PC: 1 x 3.5mm audio in/out jack, 1 x 3.5mm microphone in/out jack
Console Connectors	<ul style="list-style-type: none"> • 1 x USB Keyboard (Type A) • 1 x USB Mouse (Type A) • 1 x VGA/SVGA HDB 15-pin • 1 x 3.5mm audio in/out jack • 1 x 3.5mm microphone in/out jack
Port Selection	• Push Button, Hot-Key Commands, or Windows-Based Client Switching Software
Auto-Scan Interval	• 10 ~ 60 seconds
Keyboard State	• Saved and Restored
Power Type	• USB Interface Power
Dimensions	• 167 x 80 x 28 mm (6.6 x 3.2 x 1.1 in.)
Weight	• 185 g (6.5 oz)
Temperature	• Operating: 0°C ~ 40°C (32°F ~104°F); Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	• 0%~90%, Non-Condensing
Certifications	• CE, FCC

NETWORKING SOLUTIONS

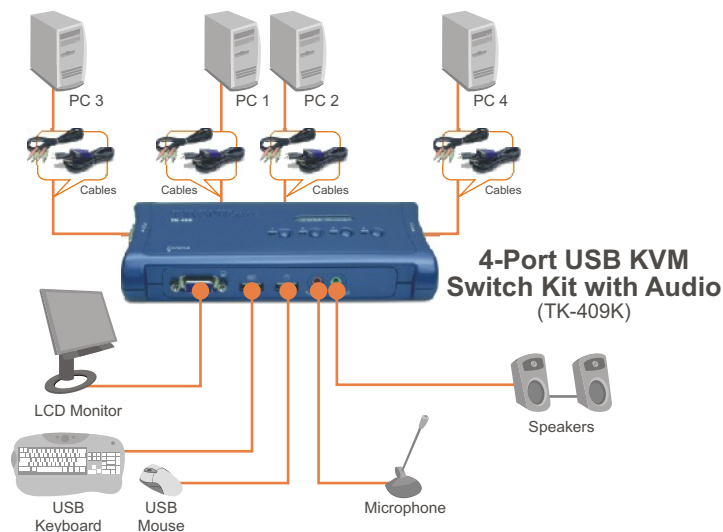

PACKAGE CONTENTS

- TK-409K
- Multi-Language User's Guide
- Utility CD-ROM
- 4 sets of USB KVM Cables
- 4 sets of Audio/Mic Cables

RELATED PRODUCTS

TK-209K	2-Port USB KVM Switch Kit with Audio
TK-407K	4-Port USB KVM Switch Kit
TK-408K	4-Port PS/2 Audio KVM Switch Kit

ORDERING INFORMATION

TRENDnet[®]

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

