






65W 4-Port Gigabit PoE+ Injector

TPE-147GI (v1.0R)

- 4 x Gigabit ports (Data in)
- 4 x Gigabit PoE+ ports (Data + PoE out)
- 65W PoE power budget
- Supports both PoE (15.4W) and PoE+ (30W) power
- Uses IEEE 802.3af / IEEE 802.3at industry PoE standards for greater device interoperability
- Connects PoE devices up to 100m (328 ft.) away
- Fanless design eliminates operating noise and lowers energy consumption

TRENDnet's 65W 4-Port Gigabit PoE+ Injector, model TPE-147GI, allows users to add PoE+ power to a non-PoE switch. Connect the 4-port PoE+ injector to a non-PoE Gigabit switch, and then run Ethernet cables up to 100 meters (328 ft.) to network four PoE devices. This multi-port gigabit PoE+ injector supplies up to 30W of power to four PoE or PoE+ devices. The fanless design on the 4-port PoE+ injector conveniently eliminates operating noise and lowers energy consumption.

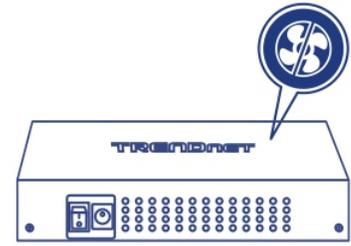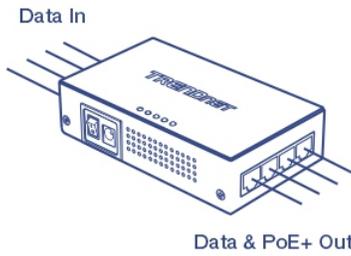

4-Port PoE

The 4-port gigabit PoE+ injector supplies up to 30W of power to four PoE or PoE+ devices.


Gigabit Ports

Features 4 x gigabit ports (data in) and 4 x gigabit PoE+ ports (data + PoE out).


Fanless Design

The fanless design of the 4-port PoE+ injector eliminates operating noise and lowers energy consumption.


NETWORKING SOLUTION

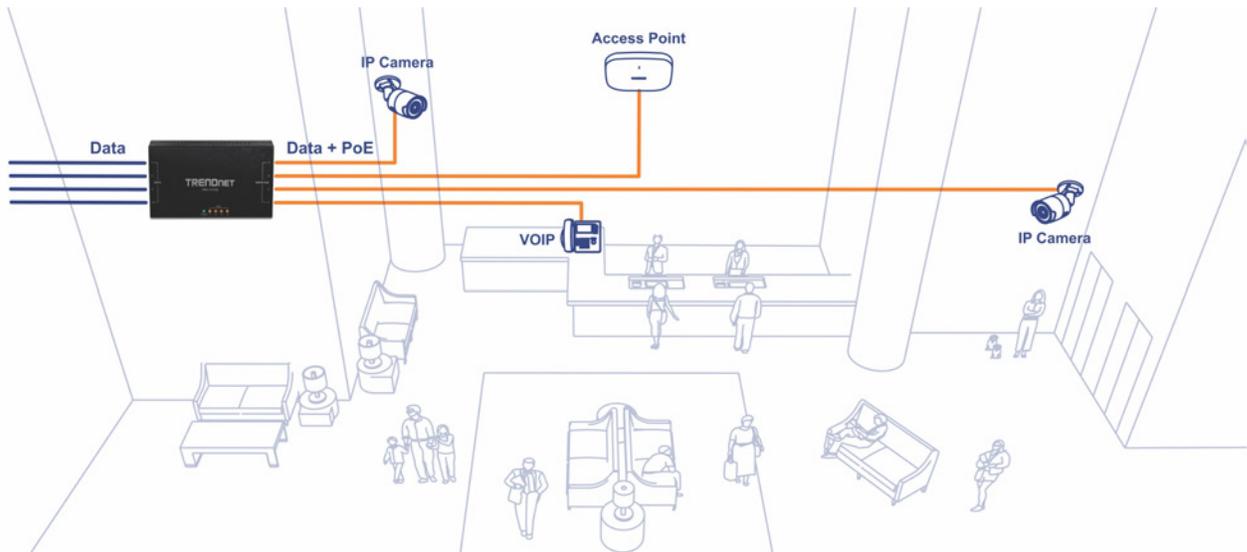

4 x Gigabit Data in ports

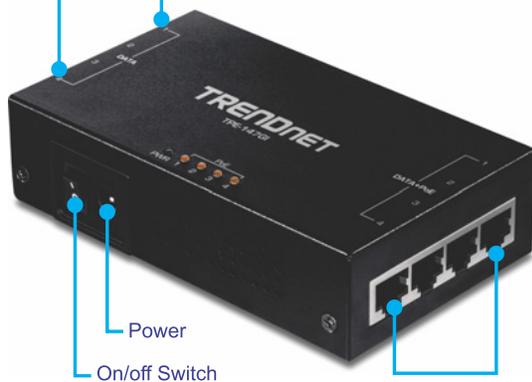

4 x Gigabit Data + PoE+ out ports

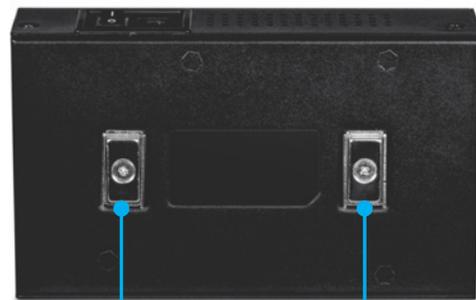

Magnet mount

FEATURES



4-Port PoE

The 4-port PoE+ injector supplies up to 30W of power to four PoE (IEEE 802.3af) or PoE+ (IEEE 802.3at) devices.



PoE Distance

Provides four PoE network connections up to 100m (328 ft.) away from the 4-port PoE injector



Easy Installation

No configuration needed, simply connect a PoE network devices to this 4-port PoE+ injector



Gigabit Ports

4 x gigabit ports (data in) and 4 x gigabit PoE ports (data + PoE out).



LED Indicators

LEDs on the 4-port PoE+ injector indicate PoE connectivity and power status

SPECIFICATIONS

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.3af
- IEEE 802.3at

Device Interface

- 4 x Gigabit Data in ports
- 4 x Gigabit Data + PoE+ out ports
- Metal Housing
- Power Switch

PoE Budget

- Max. 65W

Power

- Input: 100 – 240V AC, 50/60 Hz
- Output: 55V DC, 1.3A
- Max. consumption: 70W

PoE Delivery

- Pin 1, 2 for power+ and pin 3, 6 for power- (mode A)

Temperature

- 0° – 40° C (32° – 104° F)

Humidity

- Max. 90% non-condensing

Certifications

- CE
- FCC

Dimensions

- 126.4 x 73.95 x 32mm (5 x 2.9 x 1.26 in.)

Weight

- 322g (11.3 oz.)

Warranty

- 3 year

Package Contents

- TPE-147GI
- Quick Installation Guide
- Power Brick
- Power Cord

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.