



8-Port Gigabit GREENnet PoE+ Switch TPE-TG44g (V1.0R)

TRENDnet's 8-Port Gigabit GREENnet PoE+ Switch, model TPE-TG44g, reduces equipment and installation costs by delivering data and power over existing Ethernet cables. This unmanaged switch offers four Gigabit PoE+ and four Gigabit non-PoE ports. The PoE+ standard supplies up to 30 watts of power per port for devices such as high power wireless access points, PTZ (Pan / Tilt / Zoom) internet cameras, and VoIP telephony systems.

Auto sensing technology delivers 30 watts to 802.3at PoE+ devices (up to 2 devices), 15 watts to 802.3af PoE devices (up to 4 devices), and only data to non-PoE devices. GREENnet technology reduces energy consumption by up to 75% when the switch is not in use. Boost office efficiency and reduce network congestion with a total switching capacity of 16 Gbps. LED indicators display device status for efficient troubleshooting. This switch comes in a sturdy metal case and quickly adds PoE+, PoE, and non-PoE devices to your network.

PRODUCT OVERVIEW

- 4 x Gigabit PoE / PoE+ ports (up to 30 watts per PoE+ port)
- 4 x Gigabit ports
- Up to 30 W per port with 60 W total power budget
- Reduces equipment cost by delivering data and power over existing network cables
- 16 Gbps switching capacity
- Sturdy metal case
- Up to 75% GREENnet power savings



FEATURES

- IEEE 802.3at and IEEE 802.3af Power over Ethernet (PoE) compliant
- Supports PoE Class 2 (7 watts) , 3 (15.4 watts), and 4 (30 watts)
- 4 x Gigabit Auto-MDIX PoE / PoE+ ports
- 4 x Gigabit Auto-MDIX ports
- Provides up to 30 watts for PoE+ (2 ports max.)
- Provides up to 15.4 watts for PoE (4 ports max.)
- Automatically detects the PoE class level of a Powered Device
- 16 Gbps switching fabric
- Forwarding Rate: 1000 Mbps (1,488,000 pps), 100 Mbps (148,800 pps), 10 Mbps (14,880 pps)
- Status LEDs: System Power, PoE, 1000 Mbps, and Link/Activity
- 1K Mac address entries
- 96 Kbyte memory buffer
- Full wire-speed non-blocking reception and transmission
- Store-and-forward switching method
- Back pressure Flow Control for Half-Duplex mode
- IEEE 802.3x Flow Control for Full-Duplex mode
- Power saving technology powers down unused ports and when a connected device is in standby mode
- Jumbo Frame support up to 9K
- Plug and Play
- Sturdy metal case
- 3-year limited warranty



SPECIFICATIONS

HARDWARE

| | |
|---------------------------|---|
| Standard | <ul style="list-style-type: none">• IEEE 802.3 10Base-T• IEEE 802.3u 100Base-TX• IEEE 802.3ab 1000Base-T• IEEE 802.3at Power over Ethernet (PoE+)• IEEE 802.3af Power over Ethernet (PoE)• IEEE 802.3x Flow Control• IEEE 802.3az Energy Efficient Ethernet |
| Ports | <ul style="list-style-type: none">• 4 x Gigabit Auto-MDIX PoE+ ports• 4 x Gigabit Auto-MDIX ports |
| Data Transfer Rate | <ul style="list-style-type: none">• Ethernet: 10/20 Mbps (Half / Full Duplex)• Fast Ethernet: 100/200 Mbps (Half / Full Duplex)• Gigabit: 2000 Mbps (Full Duplex) |
| Forwarding Rate | <ul style="list-style-type: none">• 1,000 Mbps: 1,488,000pps• 100 Mbps: 148,800pps• 10 Mbps: 14,880pps |
| Data RAM Buffer | <ul style="list-style-type: none">• 96 Kbytes |
| Address Table | <ul style="list-style-type: none">• 1K MAC entries |
| Switch Fabric | <ul style="list-style-type: none">• 16 Gbps |
| Power | <ul style="list-style-type: none">• Input: 100-240V 47-63 Hz, 2A• Output: 53V DC, 1.2A External Power Adapter |
| Diagnostic LEDs | <ul style="list-style-type: none">• Power, PoE, 1000 Mbps, Link/Activity |
| Power Consumption | <ul style="list-style-type: none">• Min: 4 watts (standby)• Max: 65 watts• PoE Max: 60 watts• (4 x 15 watts PoE devices connected or 2 x 30 watts PoE+ devices connected) |
| Temperature | <ul style="list-style-type: none">• Operating: 0° ~ 40°C (32° ~ 104°F)• Storage: -20° ~ 90°C (-4° ~ 194°F) |
| Humidity | <ul style="list-style-type: none">• Max 90% (non-condensing) |
| Dimensions | <ul style="list-style-type: none">• 142 x 95 x 30 mm (5.6 x 3.7 x 1.2 in.) |
| Weight | <ul style="list-style-type: none">• 380 g (13.4 oz.) |
| Certifications | <ul style="list-style-type: none">• CE, FCC |

POE


| | |
|----------------------------|--|
| Power over Ethernet | <ul style="list-style-type: none">• Up to 15.4 watts for PoE• Up to 30 watts for PoE+• PoE: pin 1, 2 for power+ and pin 3, 6 for power- (mode A) |
|----------------------------|--|

8-Port Gigabit GREENnet PoE+ Switch

TPE-TG44g (v1.0R)



NETWORKING SOLUTIONS

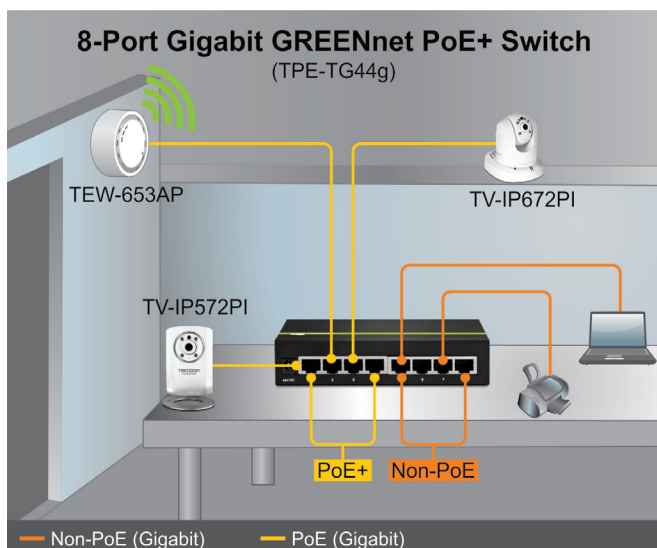

PACKAGE CONTENTS

TPE-TG44g

Quick Installation Guide

Power adapter (53V DC, 1.2A)

RELATED PRODUCTS

| | |
|------------------|--|
| TPE-T88G | 16-Port GREENnet 10/100 Mbps PoE+ Switch |
| TPE-T160 | 16-Port 30 watt 10/100 Mbps PoE+ Switch |
| TPE-TG80G | 8-Port Gigabit GREENnet PoE+ Switch |

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

