



## TPH-5000 *Outdoor Camera Housing*

The TRENDnet TPH-5000 provides the perfect solution to transform regular indoor cameras into outdoor surveillance systems. Made from die-cast aluminum and designed for the highest level of protection (IP 67), the TPH-5000 completely shields cameras from dust and water immersion. Virtually weatherproof, it also comes complete with an adjustable Fully-Cable-Managed mounting bracket, protecting camera wiring from the weather.



( Camera Sold Separately )

### FEATURES

- ... Weather resistant with IP67 protection rating
- ... Protects valuable camera from dust, rain, and snow
- ... Holds most indoor non-weatherproof cameras
- ... Supports camera size up to 300 (L) x 105 (W) x 80 (H) mm (11.8 x 4.13 x 3.14 inches)
- ... Optional Blower and Heater keep the front window clear of moisture and frost
- ... Hinged Flip-Top housing with support arm
- ... Adjustable camera mounting plate
- ... Die-cast aluminum housing and mounting bracket
- ... Light ivory powder coating finish
- ... Built-in terminal blocks for wirings
- ... Cables are routed inside the mounting bracket
- ... 2-Year warranty

### BENEFITS

- ... **Integration Friendly:**  
Flip-Top housing with support arm for easy access and installation of the camera
- ... **Cost-Effectiveness:**  
Turn most indoor or non-weatherproof camera into outdoor unit
- ... **Performance:**  
Robust and Weatherproof



# TPH-5000

## Outdoor Camera Housing

### SPECIFICATIONS

#### Range of Application:

- Indoor / outdoor installations

#### Protection Level:

- Weatherproof to IP 67

#### Optional Blower Fan and Heater (not included):

- Heater: automatic activates ON at 15 ° C (59 ° F); OFF at 25 ° C (77 ° F)
- Blower Fan: automatic activates ON at 35 ° C (95 ° F); OFF at 25 ° C (77 ° F)

#### Terminal Block:

- 3-way terminal block with 3 Amp Fuse plus 6-way terminal block

#### Housing:

- Die-Cast Aluminum with light ivory powder coated finished

#### Cable Glands:

- 2 x PGB11 Nylon Cable Gland

#### Housing Dimensions:

- 450 (L) x 135 (W) x 158 (H) mm (17.7 x 5.3 x 6.22 inches)

#### Inside Dimensions:

- 300 (L) x 105 (W) x 80 (H) mm (11.8 x 4.13 x 3.15 inches)

#### Glass Dimensions:

- 95 (L) x 80 (W) x 4 (TH) mm (3.74 x 3.15 x 0.16 inches)

#### Weight:

- Housing: 2.9 Kg (6.4 lb)
- Bracket: 0.75 Kg (1.65 lb)

#### Hardware Pack:



- Installing Camera inside the housing: 1/4 " UNC stainless hex head cap screw with washer x 1, cushion pad x 1
- Mounting Bracket to the wall: wall anchor with galvanized bolt x 3
- Mounting Housing to the Bracket: 1/4 " UNC stainless hex head cap screw with washers x 4
- Tool: Allen wrench x 1

#### Certification:

- CE



### NETWORKING SOLUTIONS

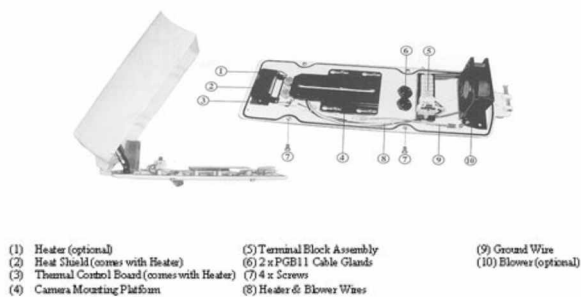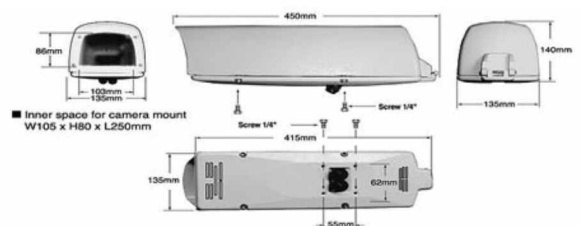

To Order Please Call:  
1-888-326-6061

### RELATED PRODUCT

TV-IP100:  
Internet Camera Server

TV-IP200:  
Internet Camera Server

TV-IP300:  
Advanced Day/Night Internet Camera Server

### ORDERING INFORMATION

**TRENDware International, Inc.**

3135 Kashiwa Street  
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: [www.TRENDNET.com](http://www.TRENDNET.com)

Email: [sales@trendware.com](mailto:sales@trendware.com)

**TRENDnet**  
TRENDware, USA