



4-Port Bus-Powered USB Hub TU-400E (B1)

TRENDnet's TU-400E is a highly integrated 4-port USB hub. It consists of one upstream and four downstream ports and was designed to bridge USB interfaced peripherals to your desktop or notebook computer. The TU-400E complies with USB 1.0/1.1 specifications and supports both full (12Mbps) and low (1.5Mbps) data rate speeds. With Plug-and-Play and Hot-Swap, you can easily connect/disconnect USB equipped camera, network adapter, modem, and joystick to your computer. Connect each port to another USB hub for limited expansion. Compact, light-weighted, and requiring no external power, the TU-400E is ideal for SOHO and mobile computing.

FEATURES

- Compatible with Universal Serial Bus Rev. 1.0 and 1.1 Specification
- Plug-and-Play (PnP) and Hot-Swappable
- Supports Windows 98/ME/2000/XP and iMAC / Macintosh
- Easy expansion with other USB Hubs, allows the use of up to 127 devices
- Supports 1 upstream and 4 downstream USB ports
- All downstream ports support high-speed (12Mbps) and low-speed (1.5Mbps) operations mode
- Power control/overload detection on each individual USB port
- Single status LED
- Bus-Powered; does not require AC Power Adapter
- 5 Year Warranty

BENEFITS

Compatibility:

4-port USB Hub is compatible with Windows 98/ME/2000 and iMac/Macintosh, so it is ready to work as soon as the user plugs it into PC.

Flexibility:

TU-400E provides convenient ways to connect USB devices to Desktop or Laptop.

Expandability:

Daisy-chain to additional USB Hubs to allow the use of up to 127 USB devices at the same time.

Speed:

Supports 12Mbps high-speed and 1.5Mbps low-speed operations mode.


4-Port Bus-Powered USB Hub

TU-400E (B1)

SPECIFICATIONS

Hardware	
Standard	• Universal Serial Bus Standard v1.1
USB Ports	• 1 x Type-A upstream port; 4 x Type-A downstream ports
Access Speed	• 12Mbps for high-speed, 1.5Mbps for low-speed
Output Power/Current	• DC +5V per port / 4 ports total 500mA
Max Devices Supported	• 127 (daisy-chaining hubs)
Power Consumption	• 2.5 Watts (max.)
LED Indicator	• 1 x Hub Status (Green)
Dimensions	• 65 x 48 x 28 mm (2.56 x 1.89 x 1.10 inches)
Weight	• 85 g. (3 Oz.)
Temperature	• Operating: 0° to 50°C (32° to 122°F) • Storage: -25° to 70°C (-13° to 158°F)
Humidity	• Storage: 10% to 90% • Operation: 10% to 70% (non-condensing)
Certifications	• FCC, CE, VCCI

NETWORKING SOLUTIONS

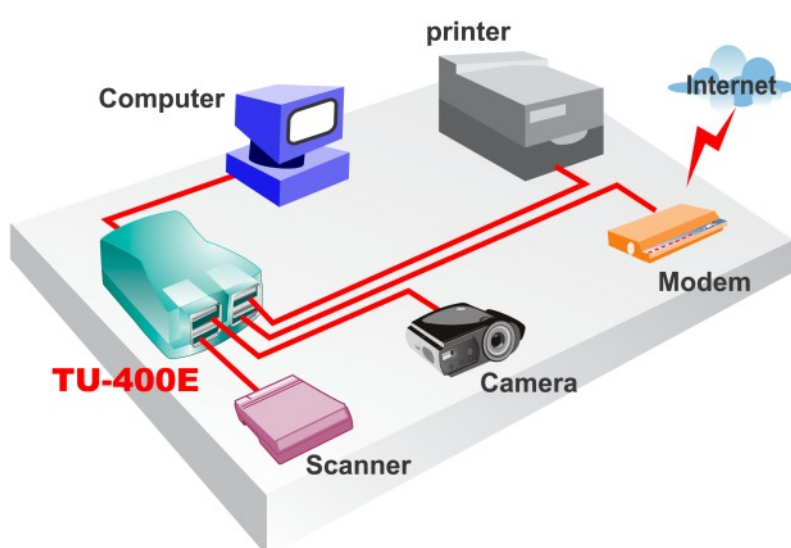

RELATED PRODUCTS

TU-400E	4-Port Compact USB Hub
TU-400	4-port USB Hub
TU-700	7-port USB Hub

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

