



USB to DVI/VGA Adapter TU2-DVIV (A1.0R)

The USB to DVI / VGA Adapter uses a USB port on your computer to connect to a high definition DVI or VGA monitor. Connect your desktop or laptop to a DVI monitor and experience the visual impact of 32-bit True Color Depth technology and a sparkling 1600 x 1200 high definition image. Install the driver and plug the USB 2.0 cable into your Microsoft Windows desktop or laptop computer. The adapter can plug into a LCD or CRT monitor that has a free VGA or DVI port. Standard or wide screen viewing modes are supported. Clone your monitor image onto 7 monitors or display a single viewing field over multiple screens.

FEATURES

- Compliant with CRT and Flat Panel (LCD) monitors
- High definition of up to UXGA 1600 x 1200 resolution for standard or wide screen ratios
- Use up to 7 monitors to clone or divide a single viewing screen
- 32-bit True Color Depth technology
- Auto display identification using VESA compliant protocols
- Installs as a Virtual Graphics Card (VGC) and fully USB 2.0 Bus-Powered
- Supports up to 6 monitors simultaneously with static, interactive and video content
- Supports Windows 2000/XP/Vista (include Vista Aero mode) operating systems
- 2 year limited warranty


USB to DVI/VGA Adapter TU2-DVIV (A1.0R)

SPECIFICATIONS


Hardware	
Standard	• USB 2.0 ; DVI-I
Interface	• DVI-I; VGA (DVI to D-Sub15 VGA adapter)
Power mode	• Bus-power
Expansions	• Up to 6 adapters (7 monitors)
Supported OS	• Windows 2000(SP4) /XP(SP4) /Vista
Resolution	• Up to 1600 x 1200 UXGA (recommended) • Up to 2048 x 1056 QXGA
System Requirements	• Intel Core 2 Duo or equivalent power CPU • 1.2Ghz or higher processor clock speed • 512MB RAM for single monitor 1GB RAM or more for multiple monitors • 1 x USB 2.0 port and 30MB free disk space
Dimension	• 48 x 77 x 22mm (1.8 x 3 x 0.9 in)
Weight	• 55g (1.8oz)
Temperature	• Operating: 0° C ~ 40° C (32° F ~ 104° F) • Storage: 10° C ~ 70° C (14° F ~ 158° F)
Humidity	• Operation: 10% to 90% (Non-Condensing)
Certifications	• FCC, CE

NETWORKING SOLUTIONS

Mirror View (Image repeated over multiple monitors)

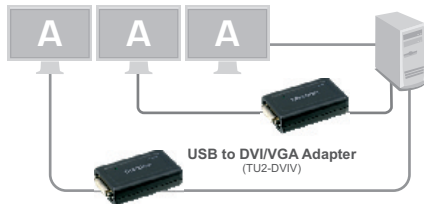

Extended View (Image divided over multiple monitors)

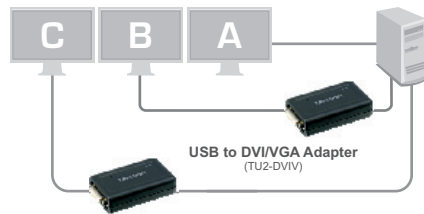

Supported viewing angles



PACKAGE CONTENTS

- TU2-DVIV
- Multi-Language Quick Installation Guide
- CD-ROM (Utility & Drivers)
- 1 x VGA to DVI convertor
- 1 x USB cable (45cm / 18in)

RELATED PRODUCTS

TU2-400E	4-Port Compact USB Hub
TU2-700	7-Port Hi-Speed USB 2.0 Hub

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

