



## **TU2-ET100** *Hi-Speed USB to Fast Ethernet Adapter*

The TU2-ET100 is a high speed USB network adapter. It allows you to instantly connect to a 10/100Mbps network from a USB enabled desktop or Notebook PC. Compliant with the USB 2.0 standard and backwards compatible with the USB 1.0 and 1.1, the TU2-ET100 features 480Mbps throughput that fully supports 100Mbps connection. You can instantly add network capability for sharing files and printers between PCs for your home or office. Use the TU2-ET100 to gain access to broadband Internet and explore valuable resources on the web.



### **FEATURES**

- Compliant with USB specification 1.0, 1.1, and 2.0
- Auto-sense 10/100Mbps connection speed
- Features full-duplex mode that doubles the network connection speed
- Bus Powered – no external power is required
- Easy to read LED indicators
- Compact and robust design – perfect solution for all network users both desktop and mobile
- Compatible with Windows 98/ME/2000/XP
- Supports Plug and Play
- Easy installation
- USB 2.0 A-B Cable included
- 5-years warranty

### **BENEFITS**

- **Compatibility:**  
TU2-ET100 is compatible with Windows 98/ME/2000/XP.
- **Flexibility:**  
The “Hot Swap” feature creates flexible connection and disconnection at any time.
- **Installation:**  
Provides easy installation with Plug and Play feature.
- **Speed:**  
Provides 480Mbps high-speed, 12Mbps full-speed, or 1.5Mbps low-speed operation mode.



# TU2-ET100

## Hi-Speed USB to Fast Ethernet Adapter

### SPECIFICATIONS

**Standard:**

- IEEE 802.3 10Base-T
- 802.3u 100Base-TX,
- USB Specification 1.0, 1.1, and 2.0

**Cabling:**

- Cat. 5 UTP/STP cable up to 100 meters (328 feet)

**Data Speed:**

- 10/100Mbps for Ethernet/Fast Ethernet data transfer

**Power Consumption:**

- Operating Mode: +5V DC, 330mA Max.
- Suspend Mode: +5V DC, 25mA

**LEDs:**

- Link (10/100Mbps), TX/RX (Activity)

**Driver Support:**

- Windows 98/ME/2000/XP

**Host Interface:**

- High-Power Bus-Powered from USB Host or USB Hub (does not require power supply)
- High-Speed USB, upstream USB Type B Connector
- Supports Suspend Power Saving mode

**Dimensions:**

- 80 x 53 x 22 mm (3.2 x 2.1 x 0.9 inches)

**Weight:**

- 68 g (2.4 oz.)

**Operating Temperature:**

- 0° ~ 65° C (32° ~ 149° F)

**Operating Humidity:**


- 10 % ~ 90 % non-condensing

**Certifications:**

- FCC, CE, VCCI



### NETWORKING SOLUTIONS

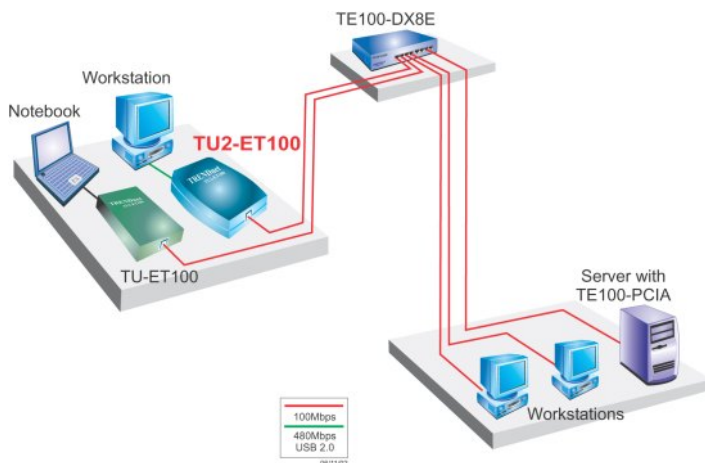

### PRODUCT INFORMATION

- TU2-ET100  
Hi-Speed USB to Fast Ethernet Adapter
- TU2-400  
4-port Hi-Speed USB Hub

### ORDERING INFORMATION

**TRENDware International, Inc.**  
3135 Kashiwa Street  
Torrance, CA. 90505. USA  
Tel: 310-891-1100  
Fax: 310-891-1111  
Web: [www.TRENDNET.com](http://www.TRENDNET.com)  
Email: [sales@trendware.com](mailto:sales@trendware.com)

**TRENDnet**  
TRENDware, USA

**To Order Please Call:**  
**1-888-326-6061**