



## 3.5" USB 3.0 External Enclosure TU3-S35(V1.0R)

The 3.5" USB 3.0 External Enclosure, model TU3-S35, supports one 3.5" SATA I or II hard disk drive with storage capacities in excess of 1 Terabyte (hard drive sold separately). Store and transfer content at 5Gbps USB 3.0 speeds—10 times faster than USB 2.0.

Install a SATA I or II hard drive and connect the enclosure to a 5Gbps USB 3.0 port on your computer. USB 3.0 is backward compatible with USB 2.0 ports. Large cooling vents and an aluminum housing cool the enclosed hard drive. An included mounting stand saves precious desk space. Save time by transferring large files at breakthrough 5Gbps USB 3.0 speeds.

### Features • 1 x USB 3.0 type B port

- Backwards compatible with USB 2.0, 1.1, and 1.0 connections
- Supports all USB speeds: Super speed (USB 3.0: 5Gbps\*), High speed (USB 2.0: 480Mbps), Full speed (USB 1.1: 12Mbps), and Low speed (USB 1.0: 1.5Mbps)
- Supports one 3.5" SATA/SATA II hard drive
- Maximum hard drive capacity supported: 2TB
- Compatible with Windows, Mac, and Linux operating systems
- Blue LEDs flash when transferring data
- Light weight aluminum housing
- Enclosure stand saves desk space
- Plug and play support with no driver installation required
- 2-year limited warranty

\*Data is transferred over USB3.0 connections at up to 5Gbps. However actual data throughput may be significantly affected by choice of hard drive, computer system architecture, CPU loading, and other factors.

# 3.5" USB 3.0 External Enclosure

## TU3-S35(V1.0R)


### SPECIFICATIONS

Hardware	
USB Standards	• USB 3.0 • Backwards compatible with USB 2.0, v1.1, and 1.0
External Ports	• 1 x USB 3.0 Type B port
HD Interface	• 1x SATA/SATA II
Compatible drives	• 3.5 in. SATA/SATA II
HD Capacity	• 2TB (max.)
Supported OS	• Windows 7 (32/64-bit), Vista (32/64-bit), XP (32/64-bit), 2000 • Mac OS X v10.4 to 10.6 • Linux
Data Rate	• Super speed: 5Gbps* (USB 3.0) • High speed: 480Mbps (USB 2.0) • Full speed: 12Mbps (USB 1.1) • Low speed: 1.5Mbps (USB 1.0)
HD Transfer Rate	• SATA II: up to 3Gb/sec • SATA I: up to 1.5Gb/sec
Power Switch	• On/off
Power Consumption	• Max. 0.75w
Dimensions (L x W x D)	• 133.35 x 38.1 x 196.85mm (5.25 x 1.5 x 7.75in.)
Weight	• 560g (19.75oz)
Enclosure Material	• Aluminum and PVC
Temperature	• Operating: 10°C ~ 40°C (50°F ~ 104°F) • Storage: -10°C ~ 80°C (14°F ~ 176°F)
Humidity	• Max. 90% (Non-condensing)
Certifications	• CE, FCC

### NETWORKING SOLUTION

#### 3.5" USB 3.0 External Enclosure

(TU3-S35)

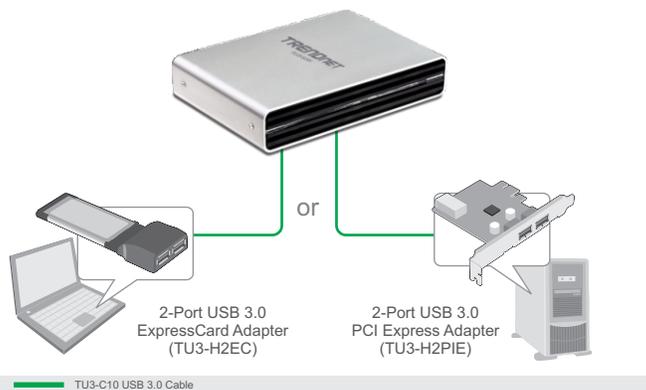

### PACKAGE CONTENTS

- TU3-S35
- Multi-Language Quick Installation Guide
- CD-ROM (User's Guide)
- USB 3.0 Type A to Type B cable(1.8m / 6ft)
- Power Adapter (12V, 2A)
- Hard drive mounting screws
- Stand

### RELATED PRODUCTS

TU3-H2PIE	2-Port USB 3.0 PCI Express Adapter
TU3-H2EC	2-Port USB 3.0 Express Card
TU3-C10	3m/10ft. USB 3.0 Cable

### CONTACT INFORMATION

#### TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

**1-888-326-6061**