



TV-IP312 rev: 03.10.2011



# SecurView Day/Night Internet Camera TV-IP312 (A1.OR)

The 2-Way Audio Day/Night Internet Camera transmits real-time high quality video and audio over the Internet. See, hear and talk to people, in your camera's viewing area during the day or in the dark, from any Internet connection. Complimentary SecurView camera management software allows you to monitor what you value most at home or at work.

The camera provides crystal clear MPEG4 video streams over an internet connection. The Infrared lens provides night monitoring for low light environment. A built-in microphone and optional speakers accommodate 2-way audio communication. Advanced intuitive software includes motion detection recording, email alerts, scheduled recordings and progressive search options. This cameras brilliant image quality, USB flash support, day and night capabilities and 2-way audio make it ideal for home, small office and business use.

- FEATURES Built-in USB port allows you to store still image directly onto a USB flash or hard drive\*
  - Infrared lens enables day and night version (night visibility up to 5 meters)
  - Supports TCP/IP networking, SMTP Email, HTTP, Samba and other Internet protocols
  - · High quality MPEG-4 and MJPEG video recording with up to 30 frames per second
  - Supports 3GPP live video viewing via 3G mobile phone \*\*
  - · Hear and talk to people in your camera's viewing area through your computer
  - · Record streaming video to your computer and Network Storage
  - Supports still image snapshot to FTP, Email and Flash drive
  - Motion detection with Email notification
  - · Supports two adjustable motion detection windows with just-in-time snapshot
  - · Supports time stamp overlay
  - Quick Universal Plug and Play installation
  - Free SecurView<sup>™</sup> software: view and record up to 16 cameras simultaneously \*\*\*
  - 3-year limited warranty
  - USB port supports up to 500mA power device with FAT16/32 format
  - \*\* The 3G service from a mobile phone provider is required
  - \*\*\* Monitoring multiple cameras may require a high performance CPU

### SPECIFICATIONS


Image Sensor		
Sensor	<ul> <li>¼" Color CMOS Sensor</li> </ul>	
Resolution	• 640 x 480 pixel	
Fixed Lens	• f: 4.6mm, F: 2.8 (Board Lens)	
Viewing Angle	60 Degree	
Minimum Illumination	• 0.5Lux @ F2.0	
Audio		
Microphone Input	Internal Omni-Directional     Sensitivity: -48dB + 3dB     Response Frequency: 50 ~ 16000Hz	
Audio Output	3.5mm Speaker Output Jack	
Format	PCM/AMR (Mono)	
Video/Image		
Video Format	MPEG4(Simple Profile), MJPEG, 3GPP	
Image Frame Rate	• 30fps @VGA, QVGA, QQVGA	
Frame Rate Setting	• 1 ~ 30fps	
Compression Ration Setting	• 5 Levels	
Resolution	• 640 x 480, 320 x 240, 160 x 120	
Exposure Control, White Balance, Gain Control	Automatic	
Image Setting	Adjustable brightness, contrast, saturation	
Flip Images	Vertical / Horizontal	
Light Frequency	• 50Hz, 60Hz or Outdoor	
Communication		
LAN	10/100Mbps Auto MDIX	
Protocol	<ul> <li>HTTP, FTP, TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, PPPoE, UPnP, RTP, RTSP, RTCP</li> </ul>	
System		
CPU	ARM9 base	
RAM	32Mbyte SDRM	
ROM	8Mbyte Nor Flash	
OS	• Linux	
System Requirement (V	Neb Configuration)	
CPU	Pentium III 350MHz or above	
Memory Size	128MB or above	
Resolution	<ul> <li>800 x 600 or above</li> </ul>	
Browser	Internet Explorer 6.0 or above	
Supported OS	Windows 2000/XP/Vista	
System Requirement (S	SecurView™ Software)	
CPU	Pentium 4 1GHz or above	
Memory Size	512MB or above	
Resolution	• 1024 X 768 or above	
Supported OS	Windows 2000/XP/Vista	



### SPECIFICATIONS

Physical/Environme	ental
Dimension	• 70 x 100 x 57mm (2.67 x 3.94 x 2.95 in.)
Weight	• Camera: 140g (4.94oz.); Stand: 135g (4.76oz.)
Power	5V DC, 2.5A External Adapter
Power Consumption	8 Watts (Max)
LEDs	Power (Orange), Link (Green)
LED	Enable/Disable Support
IR Wavelength	• 850nm
Temperature	<ul> <li>Operating: 0°C ~ 45°C (32°F ~ 113°F); Storage : -10°C ~ 60°C (14°F ~ 140°F)</li> </ul>
Other	
USB Port	• USB 1.1 (Type 1)
	Up to 500mA Power Device with FAT16/32 Format

## NETWORKING SOLUTIONS

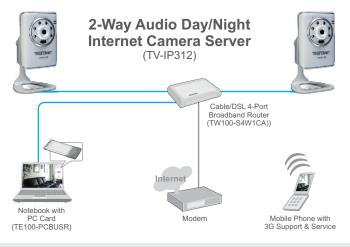

### ---- 10/100Mbps

### PACKAGE CONTENTS

• TV-IP312	
Utility CD-ROM	
Multi-Language Quick Installation Guide	
• Camera stand	
• 1.8m Cat. 5 Fast Ethernet Cable	
Power Adapter (5V DC 2.5A)	

### RELATED PRODUCTS

TV-IP212	SecurView Internet Camera
TV-IP212W	SecurView Wireless Internet Camera
TV-IP312W	SecurView Wireless Day/Night Internet Camera

### **ORDERING INFORMATION**

### TRENDNET

20675 Manhattan Place,Torrance, CA 90501 USA Tel: 1-310-961-5500 Fax: 1-310-961-5511 Web: <u>www.trendnet.com</u> Email: sales@trendnet.com

To Order Please Call: 1-888-326-6061

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit <u>http://www.trendnet.com</u>. Copyright \* TRENDnet. All Rights Reserved.