



10/100Mbps PC Card TE100-PCBUSR

TE100-PCBUSR gears with leading 32-bit bus architecture and full-duplex capabilities, which liberates high-speed network performance by providing a smooth connection to both 10/100Mbps Ethernet environments. This card is the ultimate solution for the CardBus equipped addition. Its auto-negotiation feature also configures to meet any kind of network card. It also guarantees easy installation and extra low power consumption with power-down mode and broad compatibility.

FEATURES

- PCMCIA CardBus 68-pin Connector Type II Card
- 32-Bit Bus-Mastering Data Transfer
- 10/100Mbps Data Rate Auto-Negotiation Operation
- Built-in Transmit 4Kbytes RAM Data Buffers
- Supports Full-Duplex Mode Doubles Network Data Rate to 20/200Mbps
- Integrated RJ-45 XpressPort for Dongle/Coupler-Free Connection
- Supports Windows 98SE/ME/NT4.0/2000/XP (32-bit)/Vista (32/64-bit)
- Ultra Low Power Consumption
- Single Shielded RJ-45 Connector & UTP/STP Cabling Supported
- Compatible with Extensive Notebook Models
- Supports Hot Swap and Plug & Play
- 3-Year Limited Warranty


10/100Mbps CardBus PC Card

TE100-PCBUSR

SPECIFICATIONS

Hardware	
Standards	<ul style="list-style-type: none"> • IEEE 802.3 10BASE-T Ethernet • IEEE 802.3u 100BASE-TX Fast Ethernet • ANSI/IEEE 802.3 Auto-Negotiation • PCMCIA 2.x • 32-Bit CardBus
Network Media	<ul style="list-style-type: none"> • Ethernet: UTP Cat. 3, 4, 5, EIA/TIA-568 100-ohm STP • Fast Ethernet: UTP Cat. 5, EIA/TIA-568 100-ohm STP
Data Rate	<ul style="list-style-type: none"> • Ethernet: 10Mbps/20Mbps (Half/Full-Duplex) • Fast Ethernet: 100Mbps/200Mbps (Half/Full-Duplex)
Protocol	<ul style="list-style-type: none"> • CSMA/CD
Interface	<ul style="list-style-type: none"> • 32-Bit CardBus Type II
Dimension	<ul style="list-style-type: none"> • 120 x 53 x 3mm (4.7 x 2 x 0.1 inches)
Power Consumption	<ul style="list-style-type: none"> • 3.3V DC
Diagnostic LED	<ul style="list-style-type: none"> • 10M Link/Activity • 100M Link/Activity
Supported Drivers	<ul style="list-style-type: none"> • Windows 98SE/ME/NT4.0/2000/XP (32-bit)/Vista (32/64-bit) • Novell NetWare Server 3.21, 4.1x, 5.0 • Novell Netware ODI for DOS / ODI Client 32 • Packet Driver, NDIS 2.0
Temperature	<ul style="list-style-type: none"> • Operating: 0° ~ 40° C (32° ~ 104° F); Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	<ul style="list-style-type: none"> • Operating: 10%~90% (Non-Condensing); Storage: 5%~90% (Non-Condensing)
Safety Emissions	<ul style="list-style-type: none"> • FCC, CE

NETWORKING SOLUTIONS

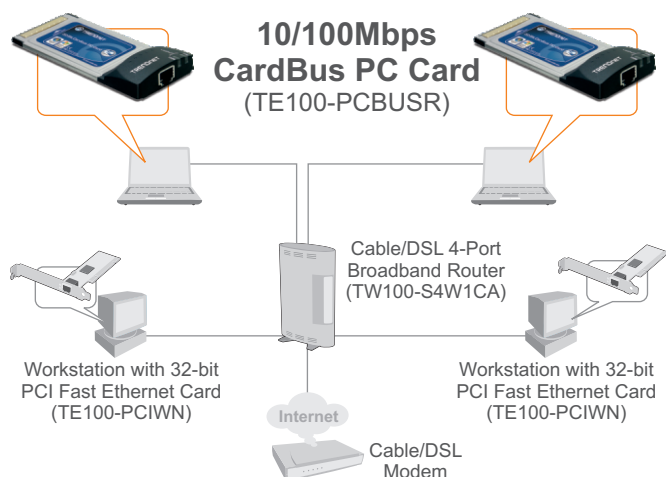

PACKAGE CONTENTS

- TE100-PCBUSR
- Multi-Language Quick Installation Guide
- Driver CD-ROM

RELATED PRODUCTS

TEG-PCBUSR	32-bit Gigabit CardBus PC Card
TE100-PCIWN	32-bit PCI 10/100Mbps N-way Fast Ethernet Card

ORDERING INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

