




USB-C to 4-Port USB 3.0 Hub with Power Delivery

TUC-H4E2 (v1.0R)


- Adds four USB 3.0 ports
- No CD installation – just plug and play
- Backward compatible with USB 2.0 ports
- Reduced clutter with this compact adapter
- Power Delivery compliant
- Supports Chrome™, Windows® 10 and Mac® operating systems

TRENDnet's USB-C™ to 4-Port USB 3.0 Hub with Power Delivery, model TUC-H4E2, adds a 4-Port USB 3.0 hub to a USB-C powered notebook. No CD installation required – simply plug in flash drives, printers, scanners and other USB 3.0 devices at speeds up to ten times faster than a USB 2.0 connection. The TUC-H4E2 is also compatible with older USB 2.0 and 1.1 devices. The USB-C power delivery port lets you charge a USB-C compatible notebook with the original charger while simultaneously using the USB 3.0 hub.

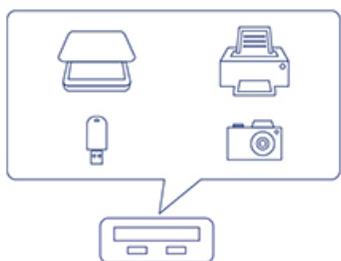


Flexible Connector

Attached flexible 10.1 cm (4 in.) USB-C cable accommodates most installation scenarios

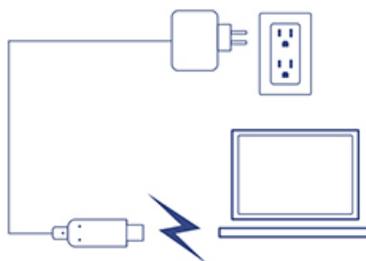

Power Delivery Port

USB-C power delivery port lets you charge a USB-C compatible notebook with the original charger while simultaneously using the USB 3.0 hub

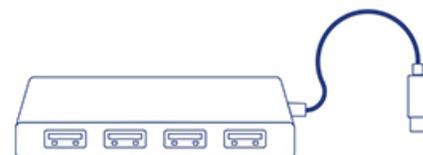

USB 3.0 Hub

4-Port USB 3.0 hub allows you to plug in flash drives, printers, scanners and other USB devices

Networking Solution



LED indicator

USB 3.0 ports

USB 3.0 charging port

USB Type-C

USB Type C power delivery (PD) port



Easy Setup

Simple installation in minutes



USB 3.0 Hub

Four USB 3.0 ports



Backwards Compatibility

Compatible with USB 2.0 and 1.1 ports



Compact Design

Reclaim desktop space and reduce clutter with this compact housing design



Flexible Connector

Attached flexible 10.1 cm (4 in.) USB-C cable accommodates most installation scenarios



Power Delivery

USB-C power delivery compliant port supports up to PD power profile 4



Operating Systems

Compatible with Chrome, Windows 10 and Mac operating systems

Specifications

Standards

- USB 3.0
- USB 2.0
- USB 1.1
- USB Type-C

Interfaces

- 3 x USB 3.0 ports
- 1 x USB 3.0 charging port
- 1 x USB Type C power delivery (PD) port
- LED indicator

Maximum Data Rate

- Up to 5 Gbps

Special Features

- Compact form factor
- Flexible USB-C cable
- Charging port

USB bus powered

- Output: 5 V DC, 0.9 A
- Consumption: 4.5 W max.

USB Charging

- USB charging specification v1.2
- Supports Apple 1.0A / 2.4A charging modes

Operating Temperature

- 0 - 40 °C (32 - 104 °F)

Operating Humidity

- Max. 95% non-condensing

Certifications

- CE
- FCC

Dimensions

- 90 x 40 x 12 mm (3.5 x 1.6 x 0.5 in.)

Weight

- 45 g (1.6 oz.)

Warranty

- 2-year limited

Package Contents

- TUC-H4E2
- Quick Installation Guide

