



FCC TEST REPORT

REPORT NO.: RF921203R03C

MODEL NO.: TEW-401PCplus

RECEIVED: TRENDware

TESTED: December 03 ~ December 23, 2003

APPLICANT: TRENDware International Inc.

ADDRESS: 3135 Kashiwa Street
Torrance CA, 90701, USA

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 69 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS	12
4.1.7	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2	TEST INSTRUMENTS	20
4.2.3	TEST PROCEDURES	21
4.2.4	DEVIATION FROM TEST STANDARD	21
4.2.5	TEST SETUP	22
4.2.6	EUT OPERATING CONDITIONS	22
4.2.7	TEST RESULTS	23
4.2.8	TEST RESULTS (A)	25
4.2.9	TEST RESULTS (B)	28
4.3	6dB BANDWIDTH MEASUREMENT	31
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	31
4.3.2	TEST INSTRUMENTS	31
4.3.3	TEST PROCEDURE	32
4.3.4	DEVIATION FROM TEST STANDARD	32
4.3.5	TEST SETUP	32
4.3.6	EUT OPERATING CONDITIONS	32
4.3.7	TEST RESULTS (A)	33
4.3.8	TEST RESULTS (B)	37



4.4	MAXIMUM PEAK OUTPUT POWER	41
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	41
4.4.2	TEST INSTRUMENTS	41
4.4.3	TEST PROCEDURES	42
4.4.4	DEVIATION FROM TEST STANDARD	42
4.4.5	TEST SETUP	42
4.4.6	EUT OPERATING CONDITIONS	42
4.4.7	TEST RESULTS (A)	43
4.4.8	TEST RESULTS (B)	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT	45
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	45
4.5.2	TEST INSTRUMENTS	45
4.5.3	TEST PROCEDURE	46
4.5.4	DEVIATION FROM TEST STANDARD	46
4.5.5	TEST SETUP	46
4.5.6	EUT OPERATING CONDITIONS	46
4.5.7	TEST RESULTS (A)	47
4.5.8	TEST RESULTS (B)	51
4.6	BAND EDGES MEASUREMENT	55
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	55
4.6.2	TEST INSTRUMENTS	55
4.6.3	TEST PROCEDURE	55
4.6.4	DEVIATION FROM TEST STANDARD	55
4.6.5	EUT OPERATING CONDITION	55
4.6.6	TEST RESULTS (A)	56
4.6.7	TEST RESULTS (B)	61
4.7	ANTENNA REQUIREMENT	66
4.7.1	STANDARD APPLICABLE	66
4.7.2	ANTENNA CONNECTED CONSTRUCTION	66
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	67
6	INFORMATION ON THE TESTING LABORATORIES	69



1 CERTIFICATION

PRODUCT : 125/54Mbps 11g Wireless PC Card
BRAND NAME : TRENDnet
MODEL NO. : TEW-401PCplus
APPLICANT : TRENDware International Inc.
TESTED: December 03 ~ December 23, 2003.
TEST ITEM: Engineering Sample
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Wendy Liao , **DATE:** May 13, 2004
(Wendy Liao)

APPROVED BY: Cody Chang **DATE:** May 13, 2004
(Cody Chang/ Supervisor)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -10.21dB at 0.166MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.66dB at 7311.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

Note: The information of measurement uncertainty is available upon the customer's request.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	125/54Mbps 11g Wireless PC Card
MODEL NO.	TEW-401PCplus
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	54/48/36/24/18/12/11/9/6/5.5/2/1/Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUN CONDUCTED OUTPUT POWER	16.10dBm
ANTENNA TYPE	Printed dipole antenna with 0dBi antenna gain
DATA CABLE	NA
I/O PORTS	PCMCIA
ASSOCIATED DEVICES	NA

NOTE:

1. This is a duplicate report of RF921203R03, the difference is changing the brand name, model name and product name.
2. The following OEMs were provided to this EUT. They are identical to each other except for their model number and brand name due to marketing requirement.

ITEM	MODEL NO.	BRAND	PRODUCT
1	TEW-401PCplus	TRENDnet	125/54Mbps 11g Wireless PC Card

3. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
4. There are two test results presented in the following sections: The test result A is for CCK technique and the test result B is for OFDM technique.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 125/54Mbps 11g Wireless PC Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4 : 2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Dell	C600	6DRV601	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017054	FCC DoC Approved
3	MODEM	ACEEX	1414	980020519	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

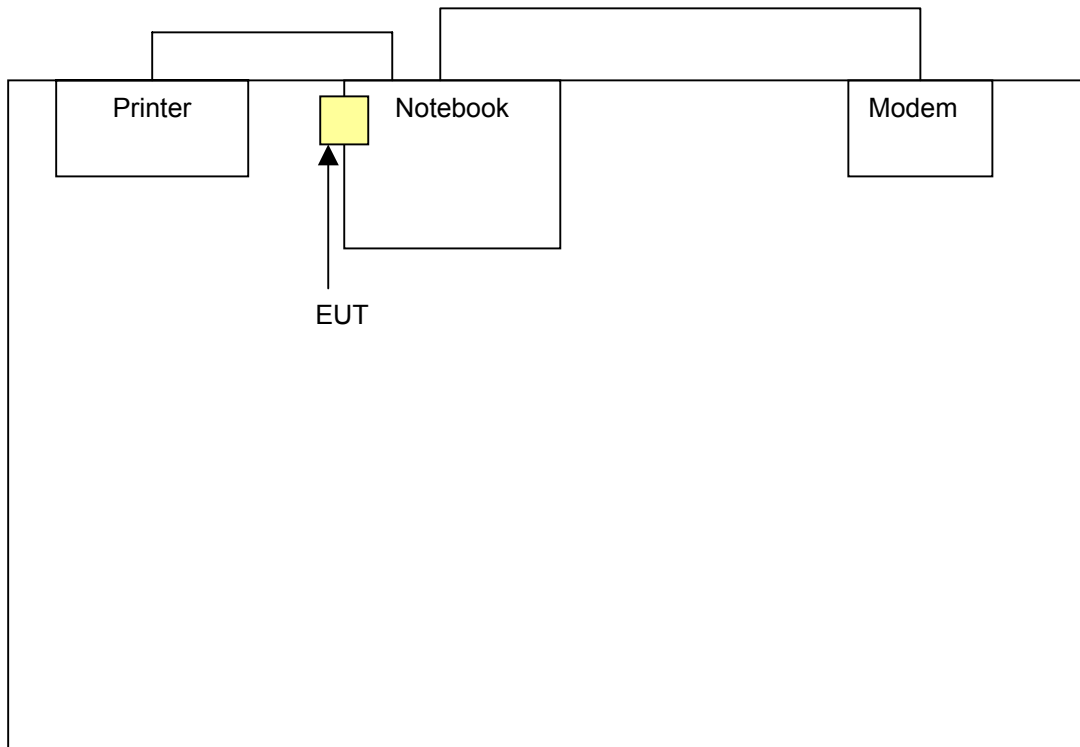



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED ON
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 09, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 09, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 09, 2004
*ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 19, 2004
*ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 19, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May 01, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels (Limit -20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

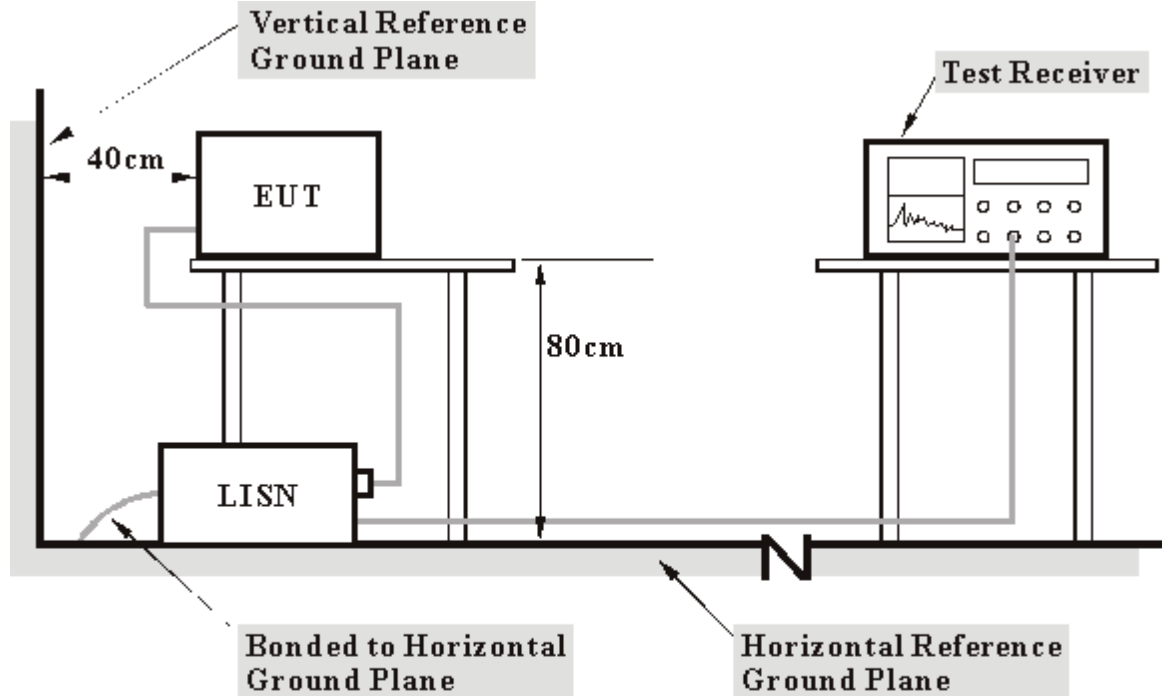

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Steps c-e are repeated.




4.1.7 TEST RESULTS

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Martine Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.06	54.91	-	54.97	-	65.18
2	0.279	0.06	43.39	-	43.45	-	60.85	50.85	-17.40	-
3	0.502	0.08	35.14	-	35.22	-	56.00	46.00	-20.78	-
4	3.840	0.22	29.24	-	29.46	-	56.00	46.00	-26.54	-
5	6.177	0.29	24.25	-	24.54	-	60.00	50.00	-35.46	-
6	20.586	0.67	23.26	-	23.93	-	60.00	50.00	-36.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

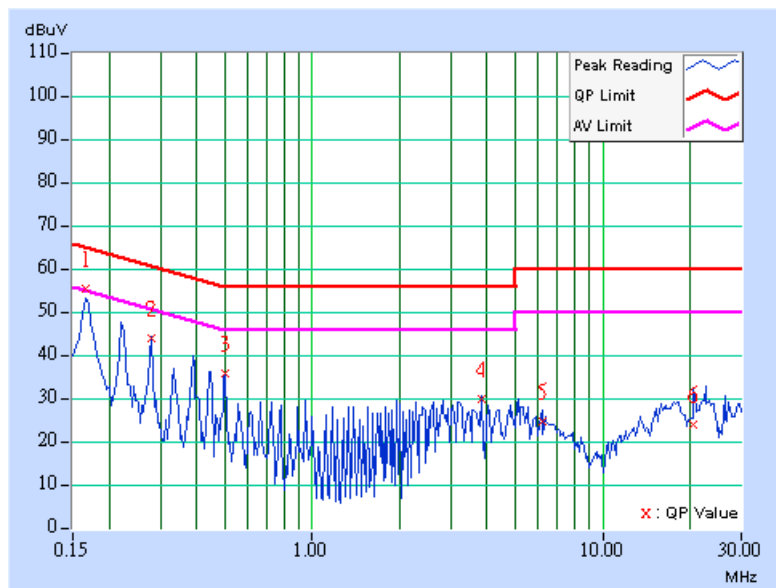




EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Martine Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.05	51.95	-	52.00	-	65.18
2	0.224	0.05	43.06	-	43.11	-	62.66	52.66	-19.55	-
3	0.502	0.07	32.92	-	32.99	-	56.00	46.00	-23.01	-
4	3.613	0.20	32.10	-	32.30	-	56.00	46.00	-23.70	-
5	5.506	0.25	26.73	-	26.98	-	60.00	50.00	-33.02	-
6	18.367	0.50	23.86	-	24.36	-	60.00	50.00	-35.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

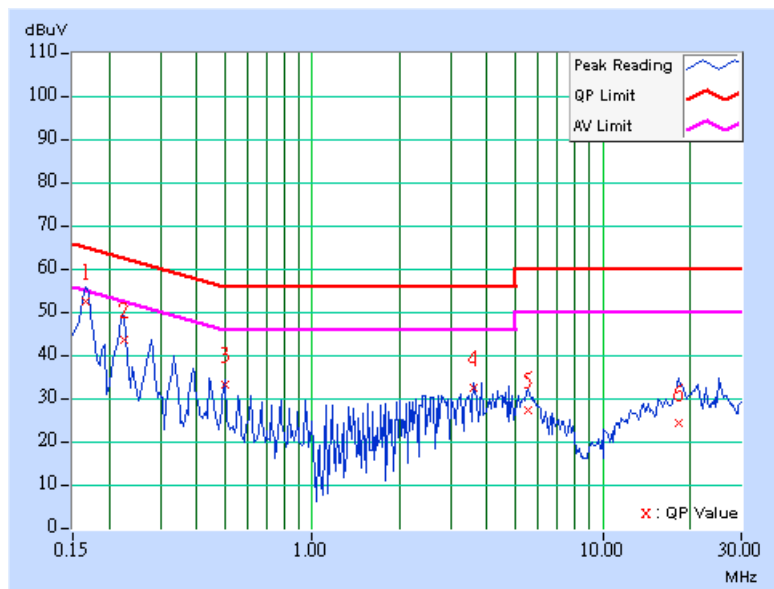




EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Martine Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.06	51.65	-	51.71	-	64.98
2	0.279	0.06	42.16	-	42.22	-	60.85	50.85	-18.63	-
3	0.502	0.08	35.62	-	35.70	-	56.00	46.00	-20.30	-
4	1.391	0.17	27.84	-	28.01	-	56.00	46.00	-27.99	-
5	4.008	0.22	28.77	-	28.99	-	56.00	46.00	-27.01	-
6	18.277	0.61	26.37	-	26.98	-	60.00	50.00	-33.02	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

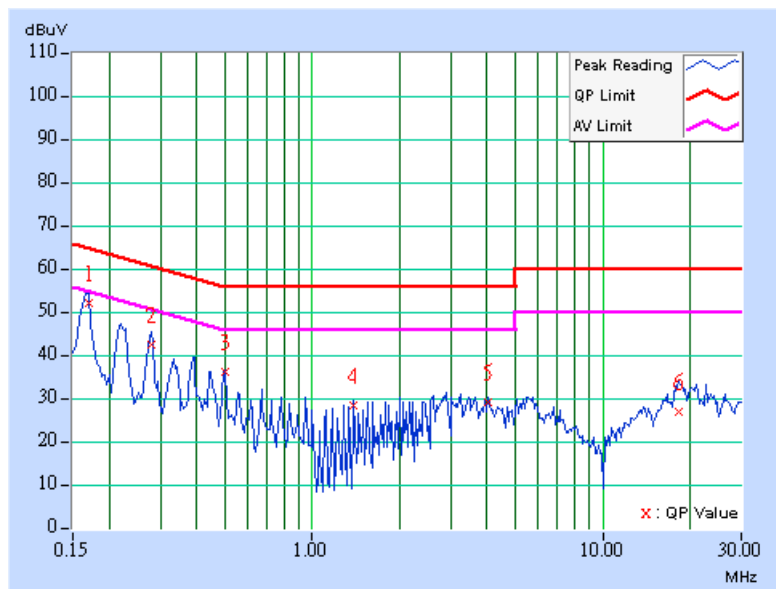




EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Martine Lee	

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.05	50.85	-	50.90	-	64.98
2	0.279	0.05	39.87	-	39.92	-	60.85	50.85	-20.93	-
3	0.502	0.07	33.17	-	33.24	-	56.00	46.00	-22.76	-
4	1.391	0.17	27.21	-	27.38	-	56.00	46.00	-28.62	-
5	4.008	0.21	33.14	-	33.35	-	56.00	46.00	-22.65	-
6	22.570	0.62	31.41	-	32.03	-	60.00	50.00	-27.97	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

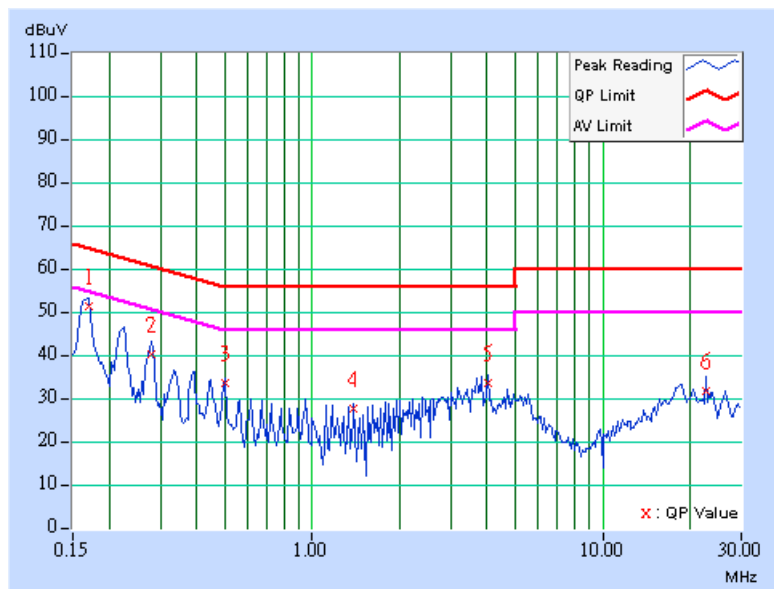




EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Martine Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.06	51.23	-	51.29	-	64.98	54.98	-13.70	-
2	0.279	0.06	41.65	-	41.71	-	60.85	50.85	-19.14	-
3	0.502	0.08	35.71	-	35.79	-	56.00	46.00	-20.21	-
4	2.617	0.19	28.71	-	28.90	-	56.00	46.00	-27.10	-
5	5.735	0.28	25.70	-	25.98	-	60.00	50.00	-34.02	-
6	18.176	0.61	26.57	-	27.18	-	60.00	50.00	-32.82	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

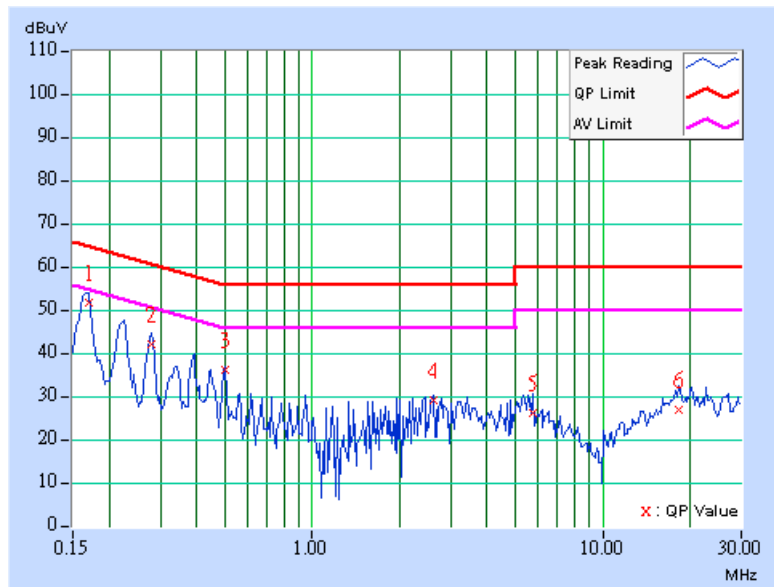




EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Martine Lee	

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.05	51.50	-	51.55	-	65.18
2	0.279	0.05	39.91	-	39.96	-	60.85	50.85	-20.89	-
3	0.502	0.07	33.27	-	33.34	-	56.00	46.00	-22.66	-
4	3.898	0.21	30.95	-	31.16	-	56.00	46.00	-24.84	-
5	18.492	0.50	26.63	-	27.13	-	60.00	50.00	-32.87	-
6	22.570	0.62	31.20	-	31.82	-	60.00	50.00	-28.18	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

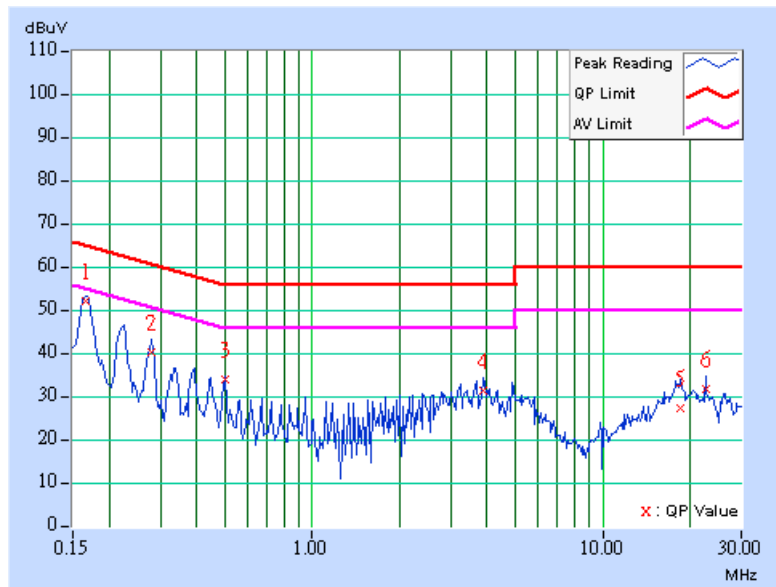



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED ON
*HP Spectrum Analyzer	8594E	3911A07465	Jul. 07, 2004
*HP Preamplifier	8447D	2944A10386	Aug. 12, 2004
HP Preamplifier	8449B	3008A01201	Nov. 11, 2004
* HP Preamplifier	8449B	3008A01292	Aug. 11, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Jun. 26, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
*SCHAFFNER TEST RECEIVER	SCR 3501	409	Jan. 26, 2004
* SCHAFFNER BILOG Antenna	CBL6111C	2727	Jul. 15, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun 30, 2004
* ADT. Turn Table	TT100	0201	NA
* ADT. Tower	AT100	0201	NA
* Software	ADT_Radiated_V 5.14	NA	NA
* ANRITSU RF Switches	MP59B	6100237246	Oct. 17, 2004
* TIMES RF cable	LMR-600	CABLE-ST10-01	Oct. 17, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Open Site No. 10.
 5. The VCCI Site Registration No. is R-1625.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

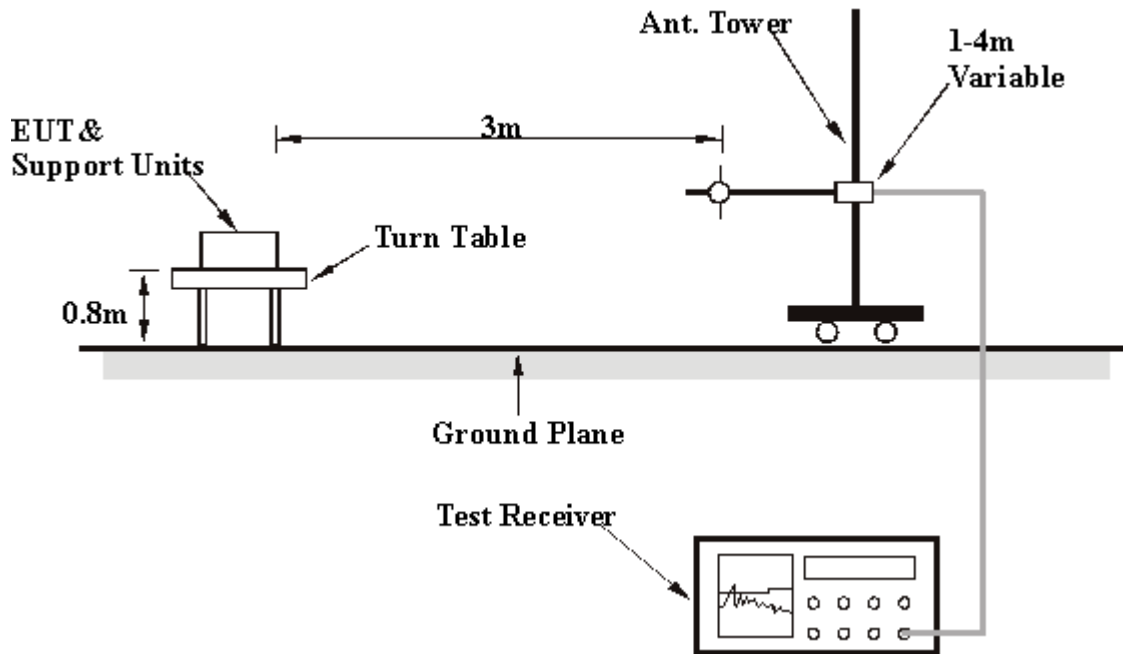

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.91	30.38 QP	40.00	-9.62	1.04 H	53	14.45	15.93
2	36.80	34.52 QP	40.00	-5.48	1.00 H	59	19.13	15.39
3	42.87	27.25 QP	40.00	-12.75	1.51 H	301	15.24	12.01
4	169.31	33.03 QP	43.50	-10.47	1.51 H	2	22.59	10.44
5	175.26	30.04 QP	43.50	-13.46	1.76 H	17	19.80	10.24
6	195.78	31.97 QP	43.50	-11.53	1.39 H	0	21.58	10.39
7	200.40	36.23 QP	43.50	-7.27	1.34 H	2	25.73	10.50
8	244.70	35.93 QP	46.00	-10.07	1.22 H	0	22.38	13.55
9	270.34	33.35 QP	46.00	-12.65	1.65 H	308	18.15	15.20
10	277.60	40.16 QP	46.00	-5.84	1.00 H	45	24.69	15.47
11	293.88	32.36 QP	46.00	-13.64	1.37 H	217	16.29	16.07
12	303.50	31.53 QP	46.00	-14.47	1.34 H	274	15.17	16.36
13	310.50	35.07 QP	46.00	-10.93	1.60 H	195	18.57	16.50
14	459.30	32.82 QP	46.00	-13.18	1.56 H	88	12.17	20.65
15	503.00	31.43 QP	46.00	-14.57	1.00 H	0	9.44	21.99
16	818.00	31.21 QP	46.00	-14.79	1.05 H	102	3.29	27.92
17	916.00	32.88 QP	46.00	-13.12	1.18 H	158	2.99	29.89

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.45	32.94 QP	40.00	-7.06	1.00 V	102	17.34	15.60
2	75.73	29.48 QP	40.00	-10.52	1.40 V	333	22.31	7.17
3	125.00	29.53 QP	43.50	-13.97	1.70 V	248	17.06	12.47
4	169.30	30.12 QP	43.50	-13.38	1.01 V	103	19.68	10.44
5	245.05	32.05 QP	46.00	-13.95	1.46 V	141	18.47	13.58
6	261.33	36.21 QP	46.00	-9.79	1.33 V	223	20.74	15.47
7	277.78	34.37 QP	46.00	-11.63	1.14 V	75	18.89	15.48
8	310.50	33.77 QP	46.00	-12.23	1.72 V	330	17.27	16.50
9	377.00	34.69 QP	46.00	-11.31	1.48 V	245	16.26	18.43
10	440.45	33.08 QP	46.00	-12.92	1.34 V	56	12.89	20.19
11	459.30	36.00 QP	46.00	-10.00	1.55 V	154	15.35	20.65

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2.8 TEST RESULTS (A)

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 1	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.10 PK	74.00	-7.90	1.09 H	236	33.43	32.67
1	2390.00	47.94 AV	54.00	-6.06	1.09 H	236	15.27	32.67
2	*2412.00	109.10 PK			1.09 H	236	76.33	32.77
2	*2412.00	101.82 AV			1.09 H	236	69.05	32.77
3	4824.00	51.60 PK	74.00	-22.40	1.48 H	299	12.57	39.04
3	4824.00	44.32 AV	54.00	-9.68	1.48 H	299	5.28	39.04
4	7236.00	56.84 PK	74.00	-17.16	1.43 H	179	11.33	45.51
4	7236.00	49.56 AV	54.00	-4.44	1.43 H	179	4.05	45.51
5	9648.00	63.80 PK	89.10	-25.30	1.22 H	216	14.83	48.97
5	9648.00	52.96 AV	81.82	-28.84	1.22 H	216	3.99	48.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.45 PK	74.00	-8.55	1.09 V	95	32.78	32.67
1	2390.00	46.97 AV	54.00	-7.03	1.09 V	95	14.30	32.67
2	*2412.00	108.45 PK			1.09 V	95	75.68	32.77
2	*2412.00	101.17 AV			1.09 V	95	68.40	32.77
3	4824.00	47.20 PK	74.00	-26.80	1.48 V	284	8.17	39.04
3	4824.00	39.92 AV	54.00	-14.08	1.48 V	284	0.88	39.04
4	7236.00	54.67 PK	74.00	-19.33	1.29 V	50	9.16	45.51
4	7236.00	47.39 AV	54.00	-6.61	1.29 V	50	1.88	45.51
5	9648.00	59.96 PK	88.45	-28.49	1.22 V	52	10.99	48.97
5	9648.00	50.47 AV	81.17	-30.70	1.22 V	52	1.50	48.97

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 6	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.90 PK			1.29 H	211	75.00	32.90
1	*2437.00	100.62 AV			1.29 H	211	67.72	32.90
2	4874.00	46.29 PK	74.00	-27.71	1.00 H	52	7.23	39.05
3	7311.00	53.79 PK	74.00	-20.21	1.29 H	211	14.73	39.05
3	7311.00	46.51 AV	54.00	-7.49	1.29 H	211	7.46	39.05
4	9748.00	62.34 PK	87.90	-25.56	1.29 H	211	13.14	49.20
4	9748.00	51.52 AV	80.62	-29.10	1.29 H	211	2.32	49.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.07 PK			1.27 V	260	78.17	32.90
1	*2437.00	103.79 AV			1.27 V	260	70.89	32.90
2	4874.00	52.29 PK	74.00	-21.71	1.37 V	48	13.23	39.05
2	4874.00	45.01 AV	54.00	-8.99	1.37 V	48	5.96	39.05
3	7311.00	56.00 PK	74.00	-18.00	1.64 V	360	10.31	45.69
3	7311.00	48.72 AV	54.00	-5.28	1.64 V	360	3.03	45.69
4	9748.00	60.84 PK	91.07	-30.23	1.28 V	204	11.64	49.20
4	9748.00	49.84 AV	83.79	-33.95	1.28 V	204	0.64	49.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 11	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.50	56.52 PK	74.00	-17.48	1.02 H	58	23.38	33.14
1	2483.50	49.24 AV	54.00	-4.76	1.02 H	58	16.10	33.14
2	*2462.00	107.20 PK			1.02 H	58	74.17	33.03
2	*2462.00	99.92 AV			1.02 H	58	66.89	33.03
3	4924.00	51.17 PK	74.00	-22.83	1.00 H	228	12.06	39.11
3	4924.00	43.89 AV	54.00	-10.11	1.00 H	228	4.78	39.11
4	9848.00	60.03 PK	87.20	-27.17	1.00 H	228	10.45	49.58
4	9848.00	50.70 AV	79.92	-29.22	1.00 H	228	1.12	49.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.50	59.18 PK	74.00	-14.82	1.27 V	260	26.04	33.14
1	2483.50	51.90 PK	54.00	-2.10	1.27 V	260	18.76	33.14
2	*2462.00	109.86 PK			1.27 V	260	76.83	33.03
2	*2462.00	102.58 AV			1.27 V	260	69.55	33.03
3	4924.00	52.84 PK	74.00	-21.16	1.30 V	58	13.73	39.11
3	4924.00	45.56 AV	54.00	-8.44	1.30 V	58	6.45	39.11
4	9848.00	62.20 PK	89.86	-27.68	1.54 V	277	12.62	49.58
4	9848.00	49.87 AV	82.58	-32.71	1.54 V	277	0.29	49.58

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



4.2.9 TEST RESULTS (B)

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 1	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.27 PK	74.00	-9.73	1.26 H	125	31.60	32.67
1	2390.00	48.27 AV	54.00	-5.73	1.26 H	125	15.60	32.67
2	*2412.00	105.10 PK			1.26 H	125	72.33	32.77
2	*2412.00	94.94 AV			1.26 H	125	62.17	32.77
3	4824.00	47.43 PK	74.00	-26.57	1.26 H	125	8.40	39.04
4	7234.00	59.00 PK	74.00	-15.00	1.43 H	173	13.49	45.51
4	7234.00	48.84 AV	54.00	-5.16	1.43 H	173	3.33	45.51
5	9648.00	61.30 PK	85.10	-23.80	1.00 H	257	12.33	48.97
5	9648.00	51.14 AV	74.94	-23.80	1.00 H	257	2.17	48.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.44 PK	74.00	-9.56	1.00 V	147	31.77	32.67
1	2390.00	48.11 AV	54.00	-5.89	1.00 V	147	15.44	32.67
2	*2412.00	105.27 PK			1.00 V	147	72.50	32.77
2	*2412.00	95.11 AV			1.00 V	147	62.34	32.77
3	4824.00	44.93 PK	74.00	-29.07	1.25 V	147	5.90	39.04
4	7236.00	61.27 PK	74.00	-12.73	1.41 V	72	15.76	45.51
4	7236.00	51.11 AV	54.00	-2.89	1.41 V	72	5.60	45.51

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 6	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.90 PK			1.13 H	162	75.00	32.90
1	*2437.00	97.74 AV			1.13 H	162	64.84	32.90
2	4874.00	48.79 PK	74.00	-25.21	1.47 H	294	9.73	39.05
3	7311.00	63.16 PK	74.00	-10.84	1.48 H	267	17.47	45.69
3	7311.00	53.00 AV	54.00	-1.00	1.48 H	267	7.31	45.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.07 PK			1.05 V	68	73.17	32.90
1	*2437.00	95.91 AV			1.05 V	68	63.01	32.90
2	4874.00	44.92 PK	74.00	-29.08	1.25 V	24	5.86	39.05
3	7311.00	63.50 PK	74.00	-10.50	1.37 V	70	17.81	45.69
3	7311.00	53.34 AV	54.00	-0.66	1.37 V	70	7.65	45.69

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
MODE	Channel 11	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.50	54.43 PK	74.00	-19.57	1.24 H	116	21.29	33.14
1	2483.50	44.27 AV	54.00	-9.73	1.24 H	116	11.13	33.14
2	*2462.00	102.53 PK			1.24 H	116	69.50	33.03
2	*2462.00	92.37 AV			1.24 H	116	59.34	33.03
3	4924.00	45.00 PK	74.00	-29.00	1.24 H	254	5.89	39.11
4	7382.00	60.04 PK	74.00	-13.96	1.26 H	166	14.29	45.75
4	7382.00	49.88 AV	54.00	-4.12	1.26 H	166	4.13	45.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.50	54.60 PK	74.00	-19.40	1.02 V	47	21.46	33.14
1	2483.50	44.44 AV	54.00	-9.56	1.02 V	47	11.30	33.14
2	*2462.00	102.70 PK			1.02 V	47	69.67	33.03
2	*2462.00	92.54 AV			1.02 V	47	59.51	33.03
3	4924.00	46.47 PK	74.00	-27.53	1.03 V	165	7.36	39.11
4	7386.00	62.04 PK	74.00	-11.96	1.56 V	73	16.28	45.76
4	7386.00	51.88 AV	54.00	-2.12	1.56 V	73	6.12	45.76

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS (A)

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 57%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.12	0.5	PASS
6	2437	10.68	0.5	PASS
11	2462	10.72	0.5	PASS




CH1

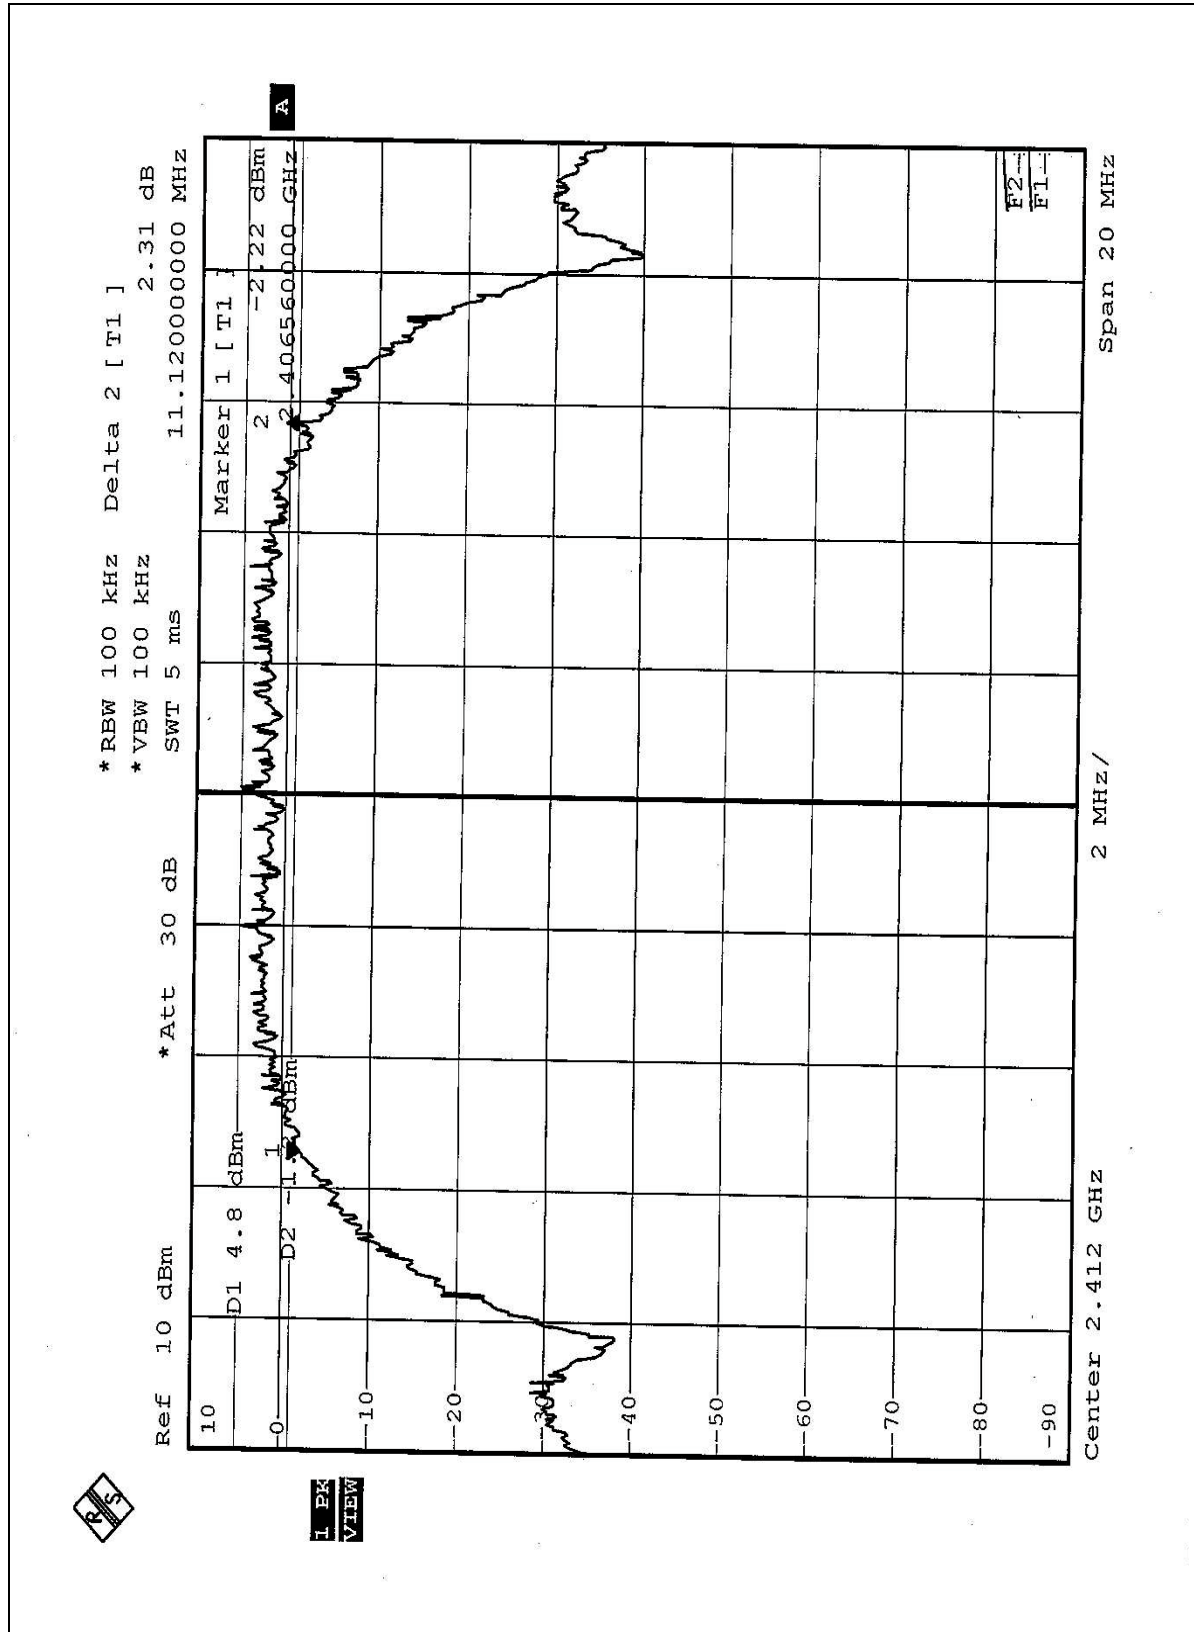




CH6

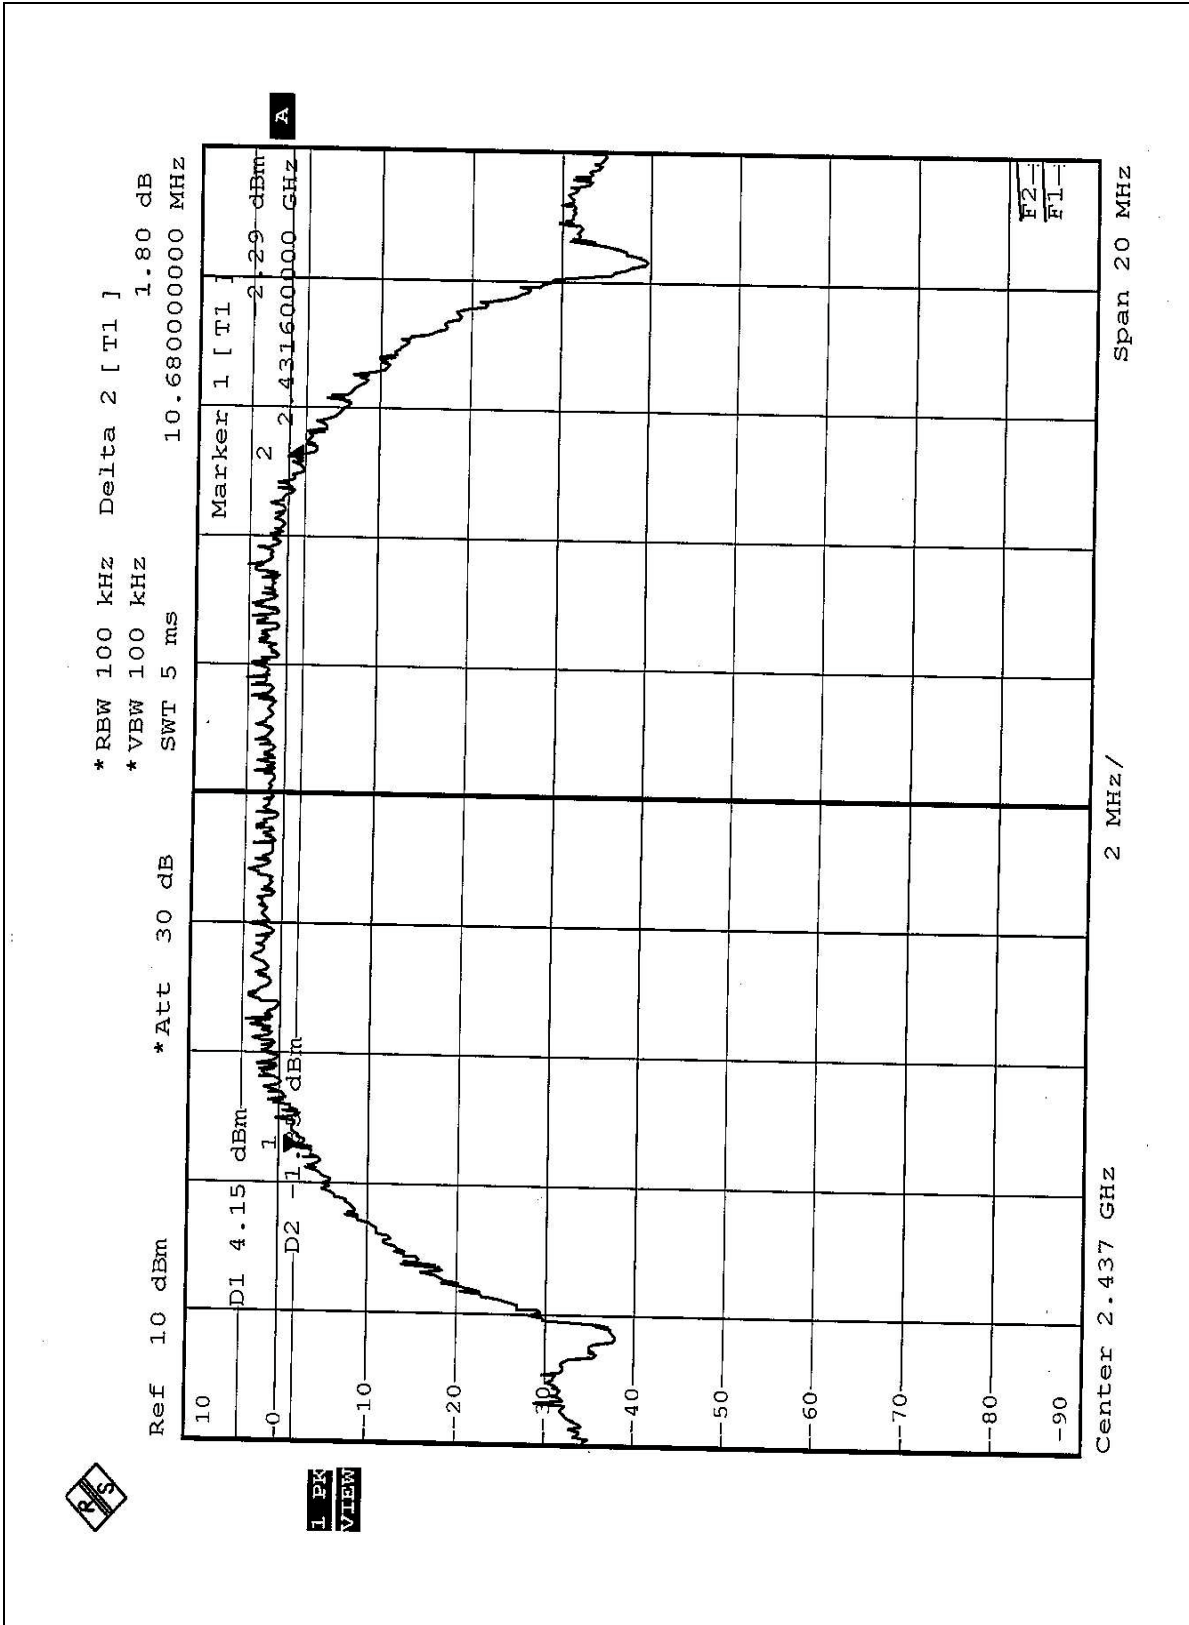



CH11

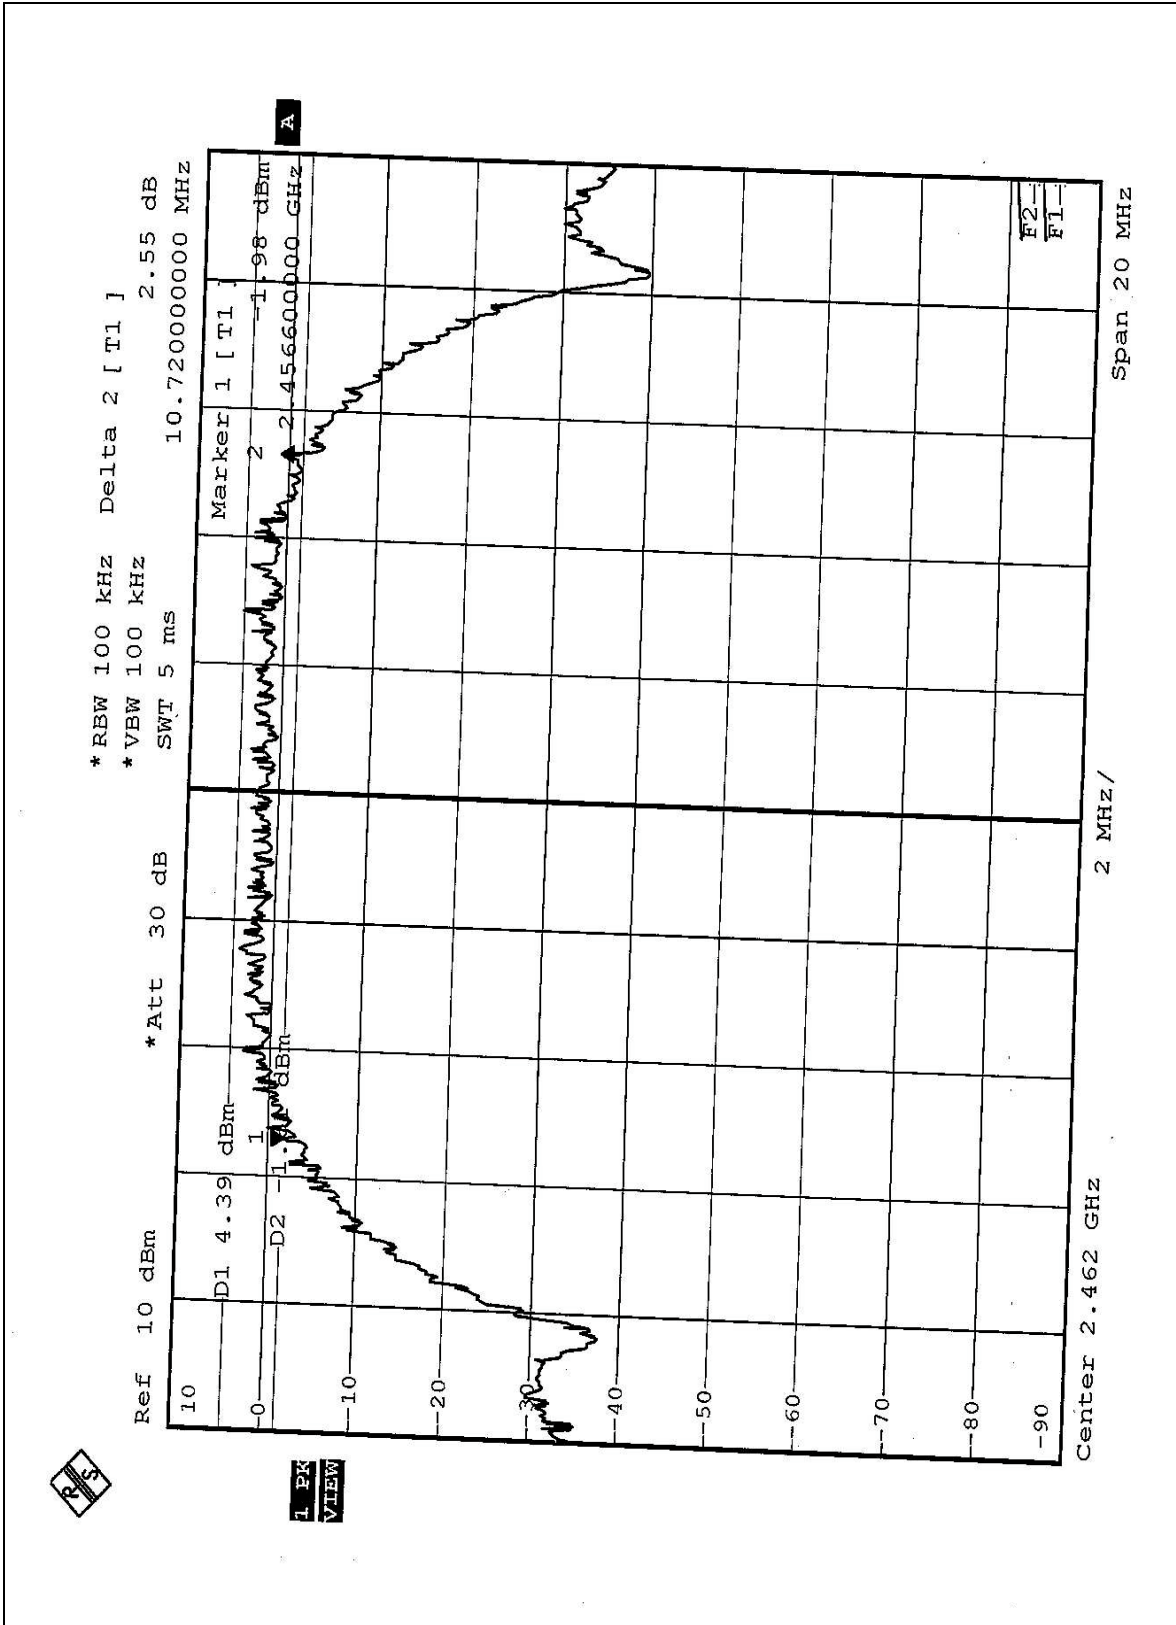




4.3.8 TEST RESULTS (B)

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 57%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.36	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.36	0.5	PASS




CH1

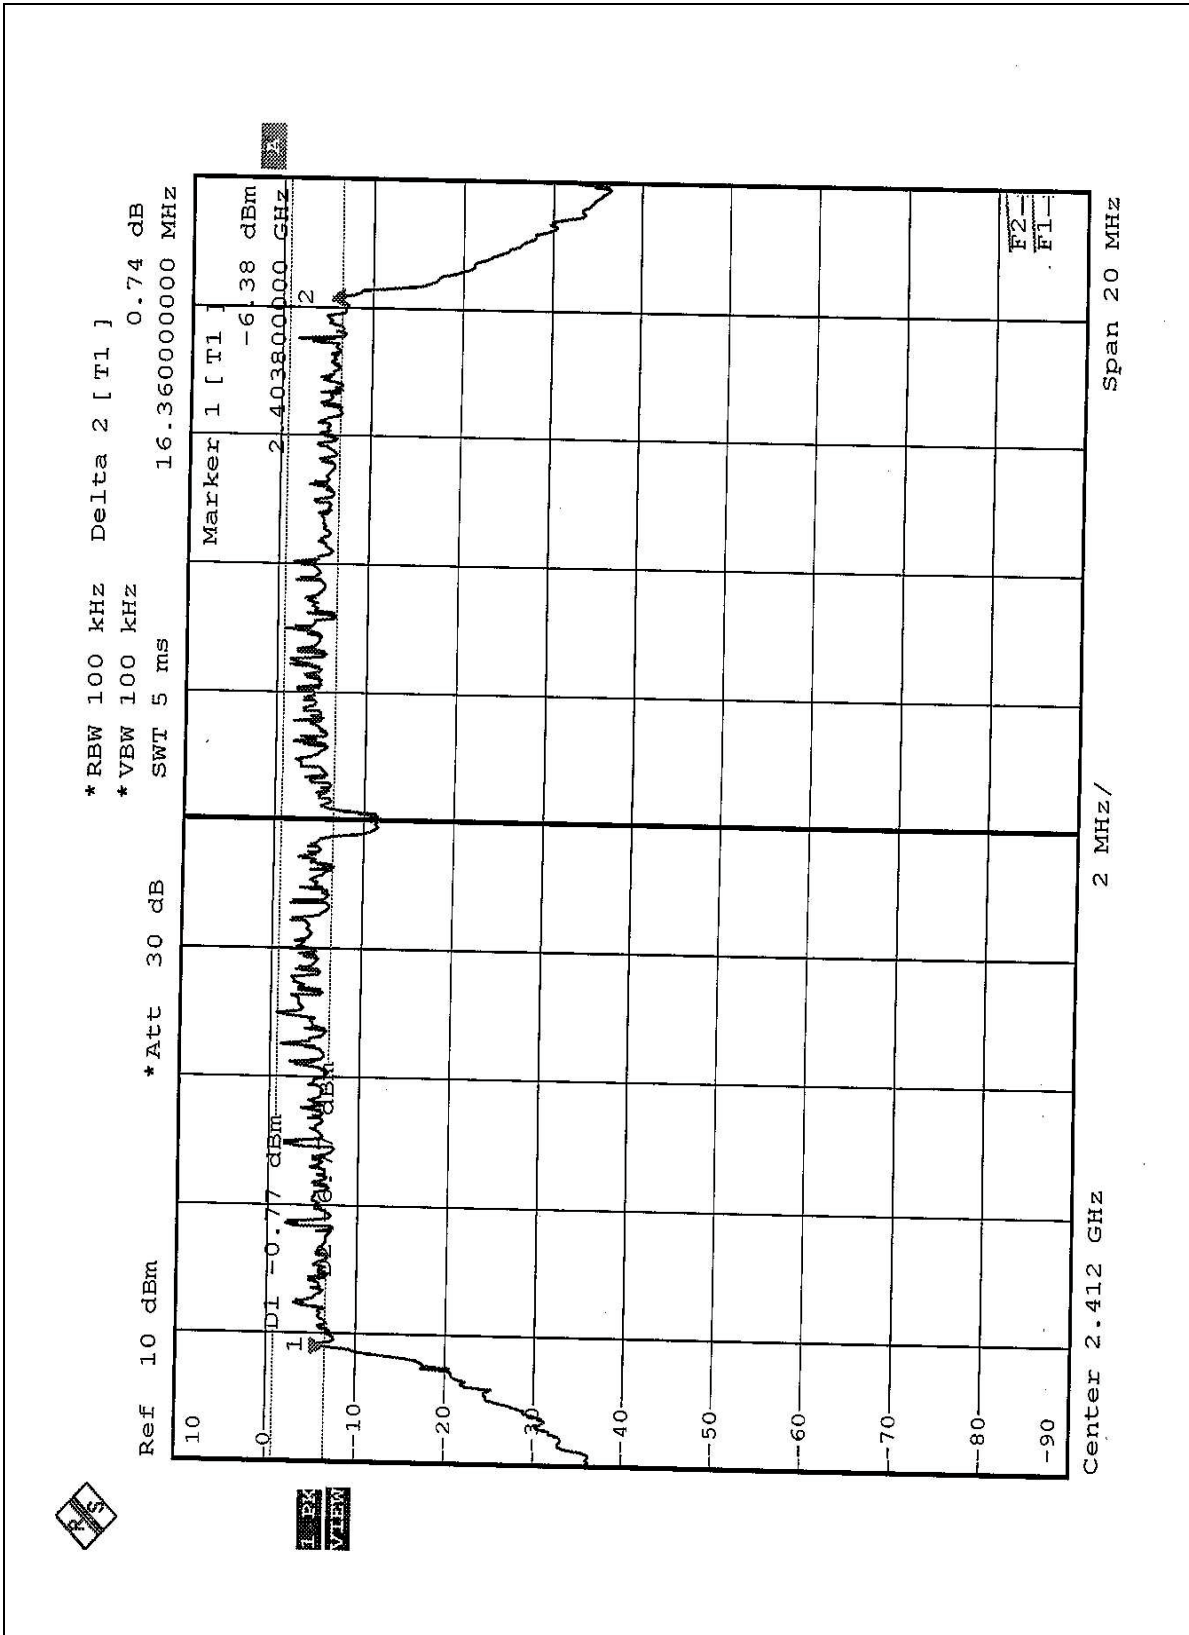



CH6

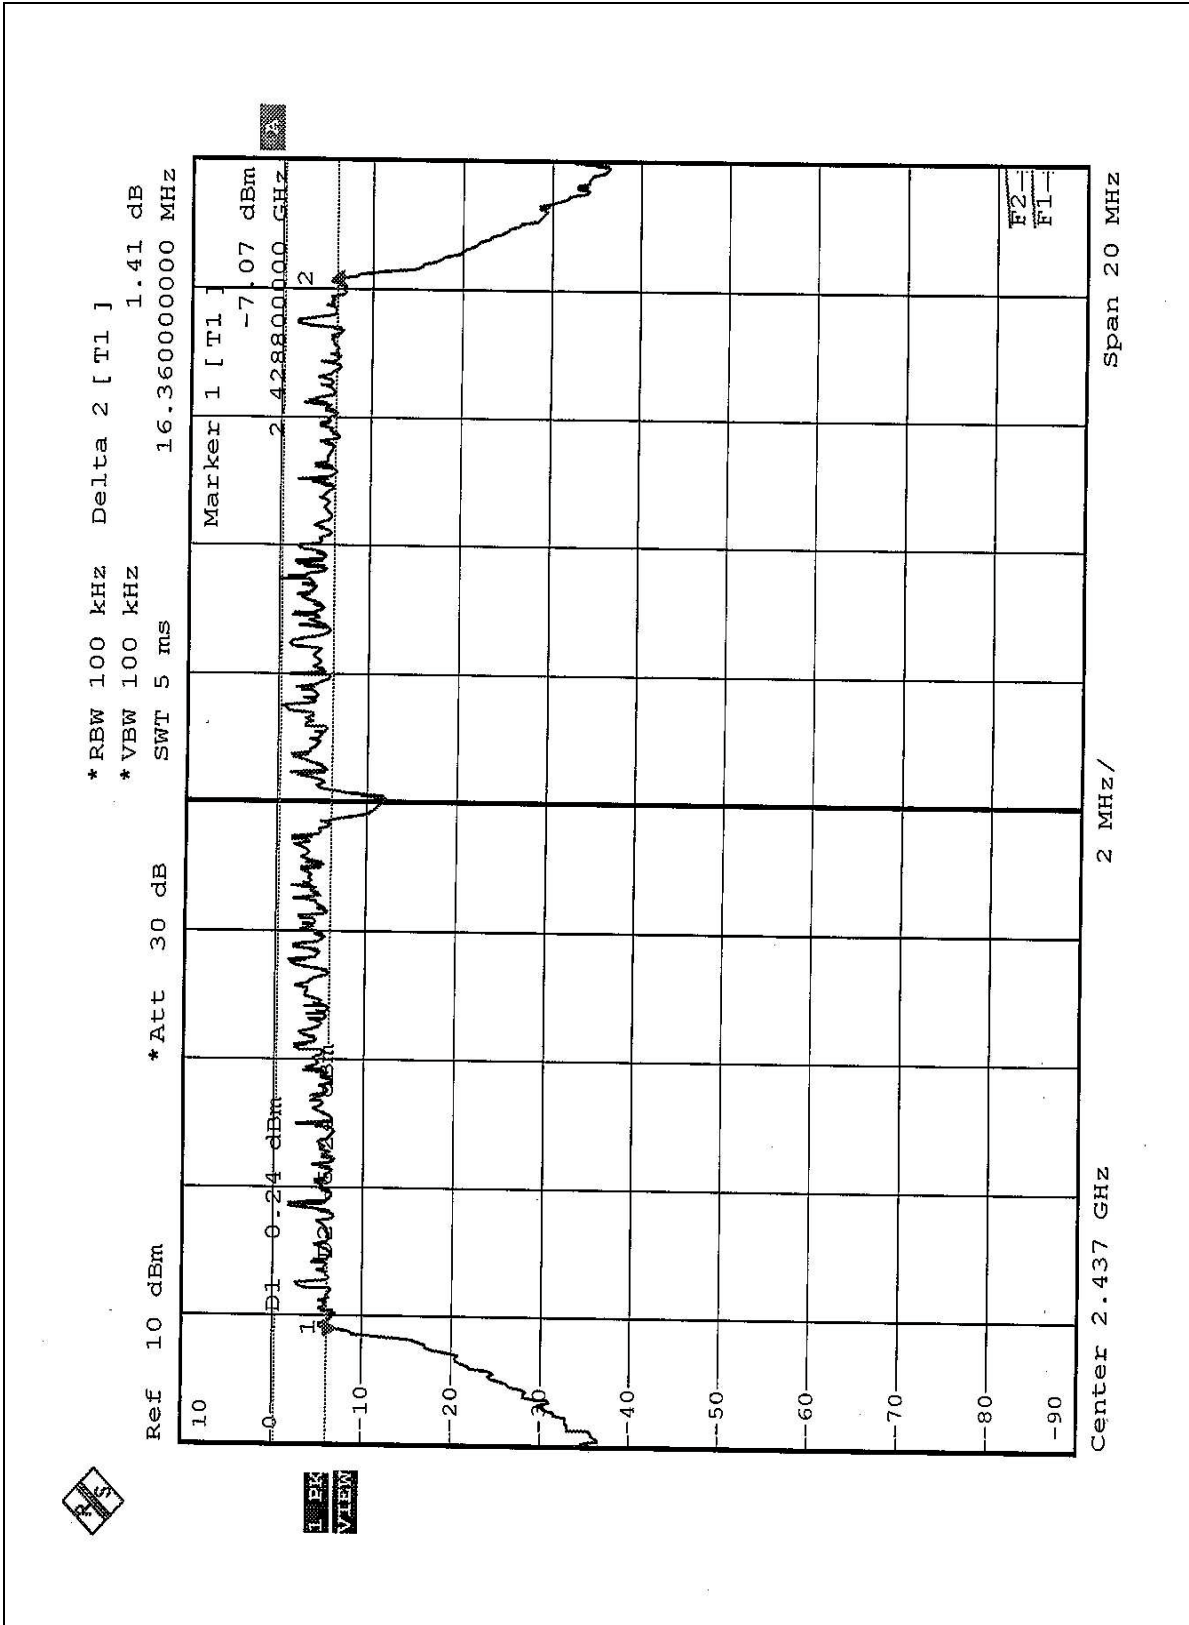



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated On
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS (A)

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 57%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.00	30	PASS
6	2437	16.10	30	PASS
11	2462	16.10	30	PASS



4.4.8 TEST RESULTS (B)

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 57%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.10	30	PASS
6	2437	15.20	30	PASS
11	2462	15.10	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

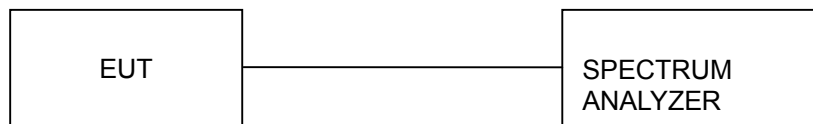

4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS (A)

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 57%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.76	8	PASS
6	2437	-10.00	8	PASS
11	2462	-10.27	8	PASS




CH1

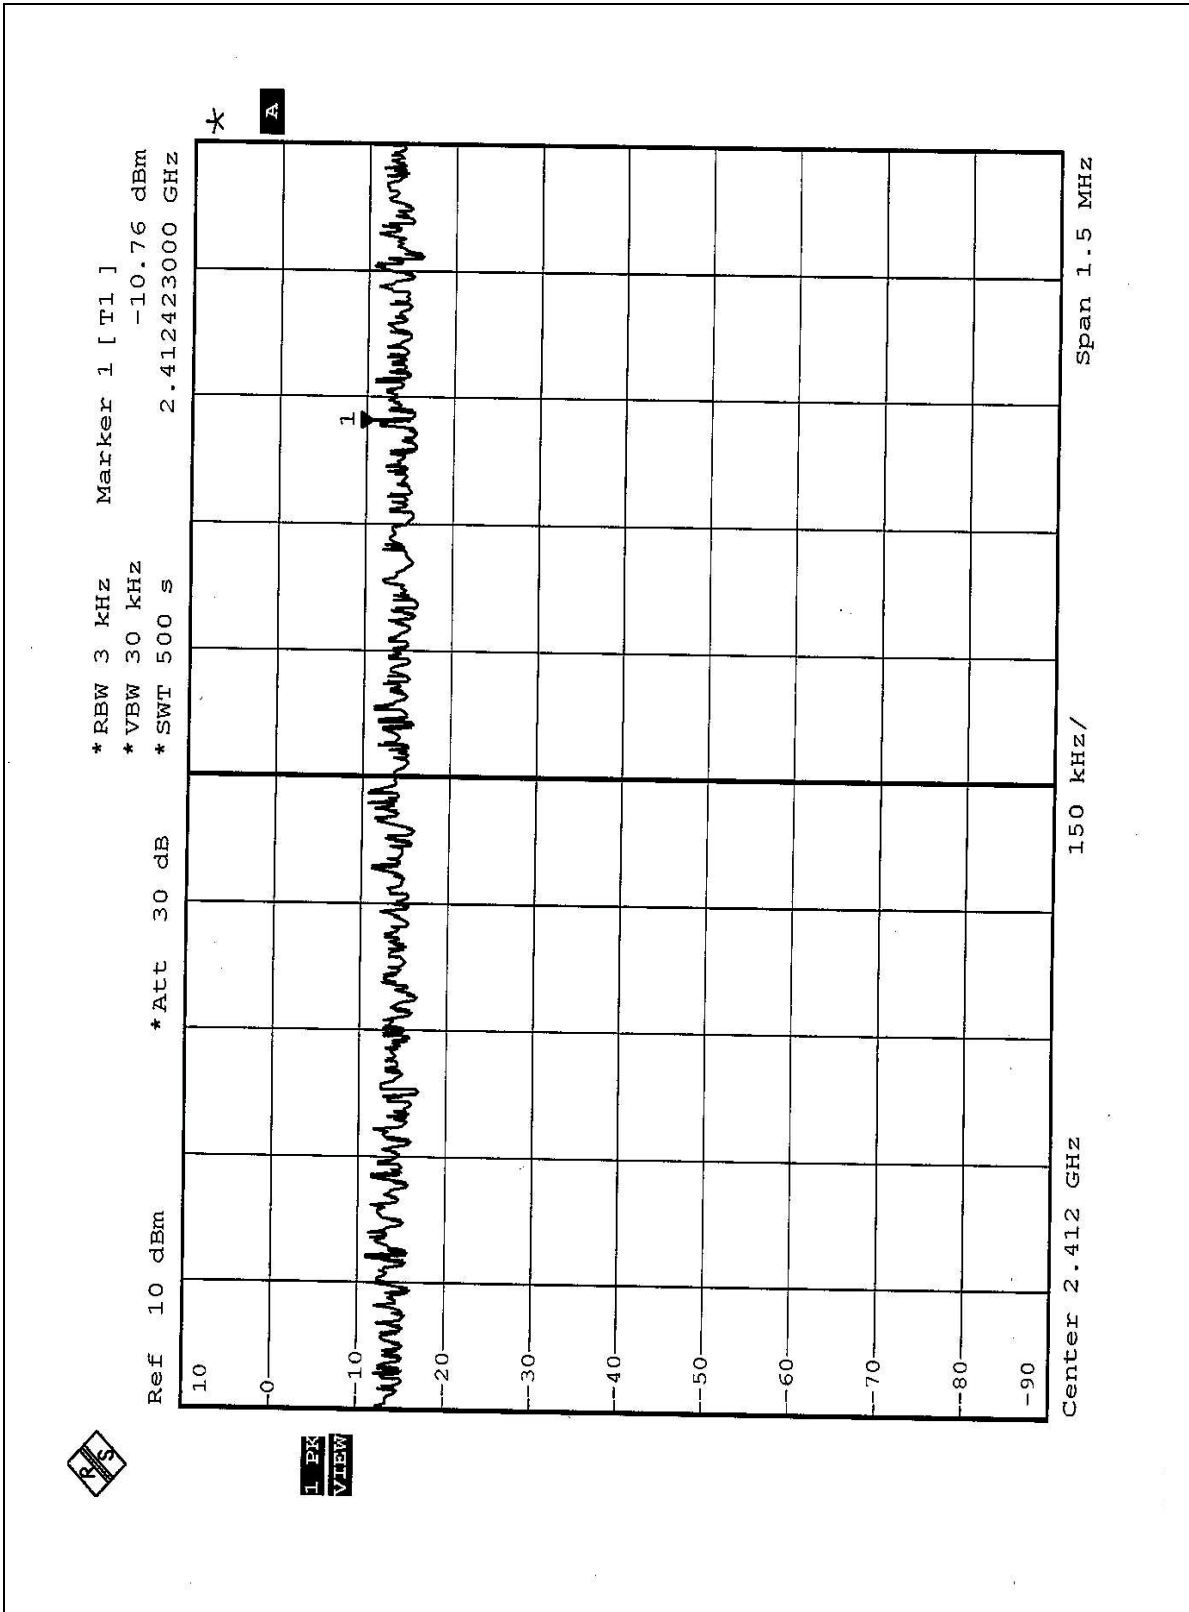




CH6

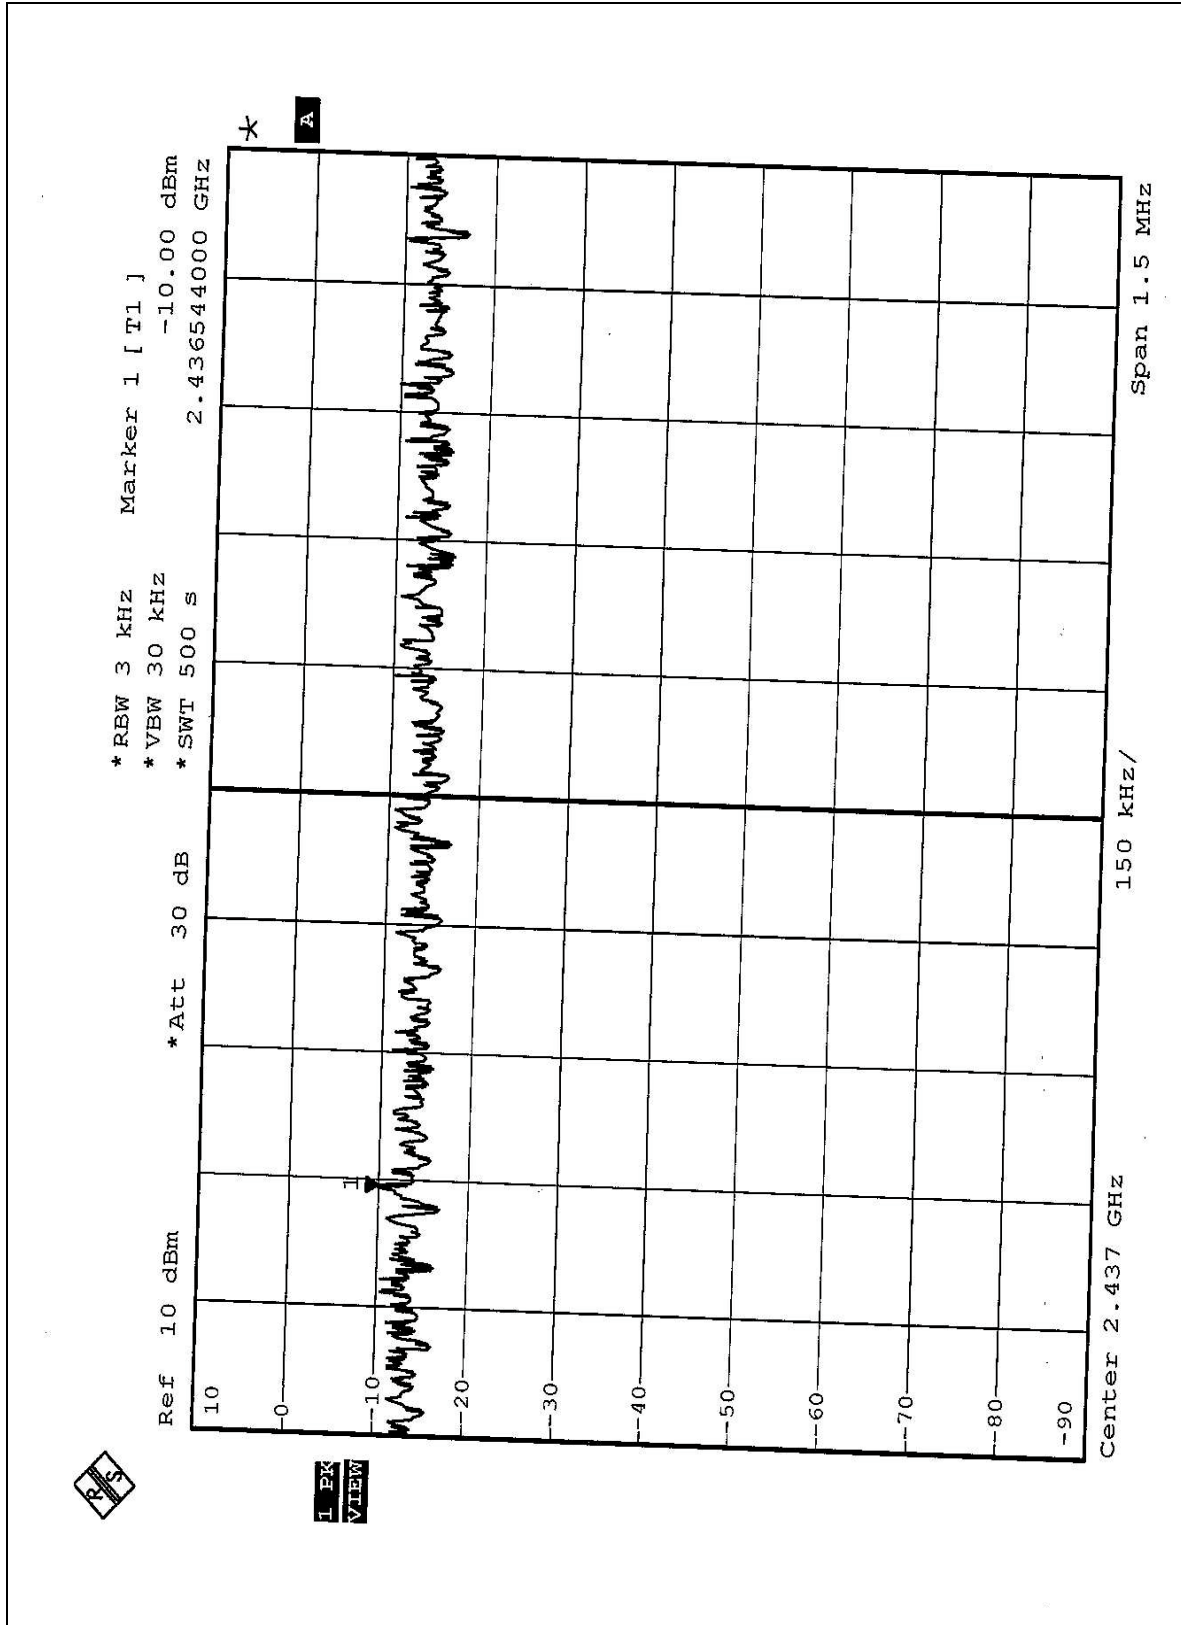



CH11

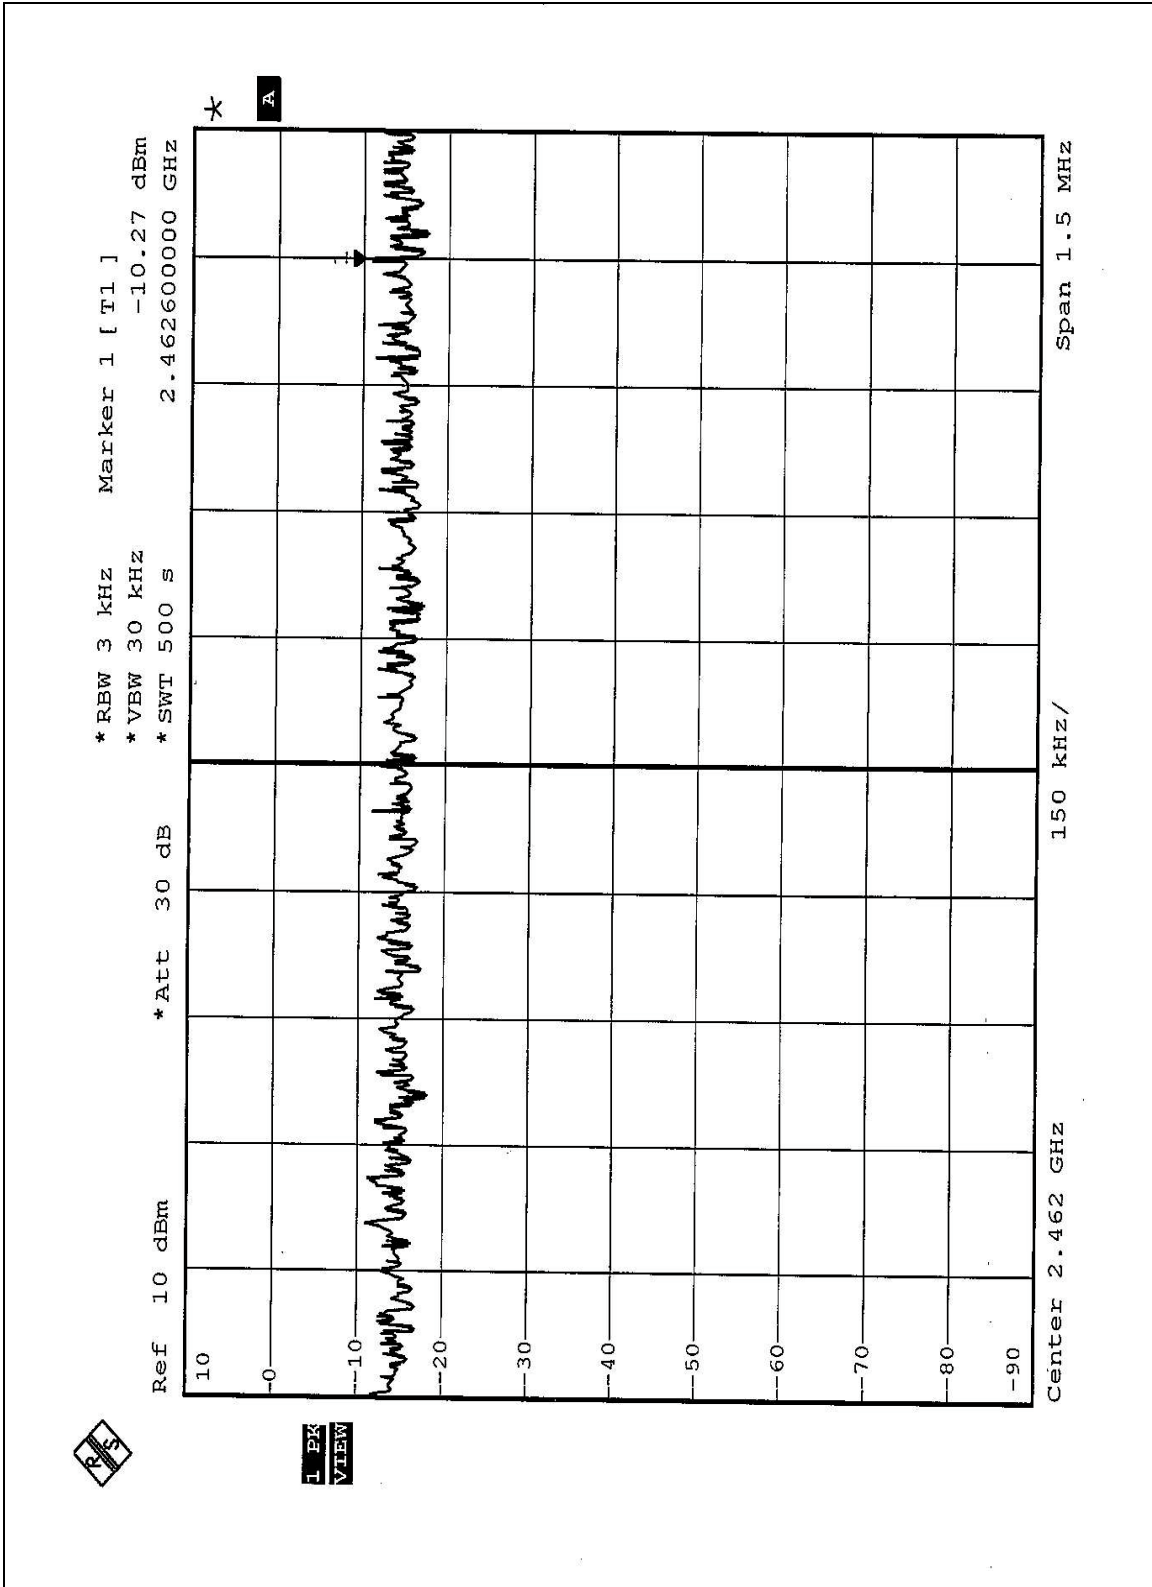




4.5.8 TEST RESULTS (B)

EUT	125/54Mbps 11g Wireless PC Card	MODEL	TEW-401PCplus
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 57%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.18	8	PASS
6	2437	-14.22	8	PASS
11	2462	-14.02	8	PASS




CH1

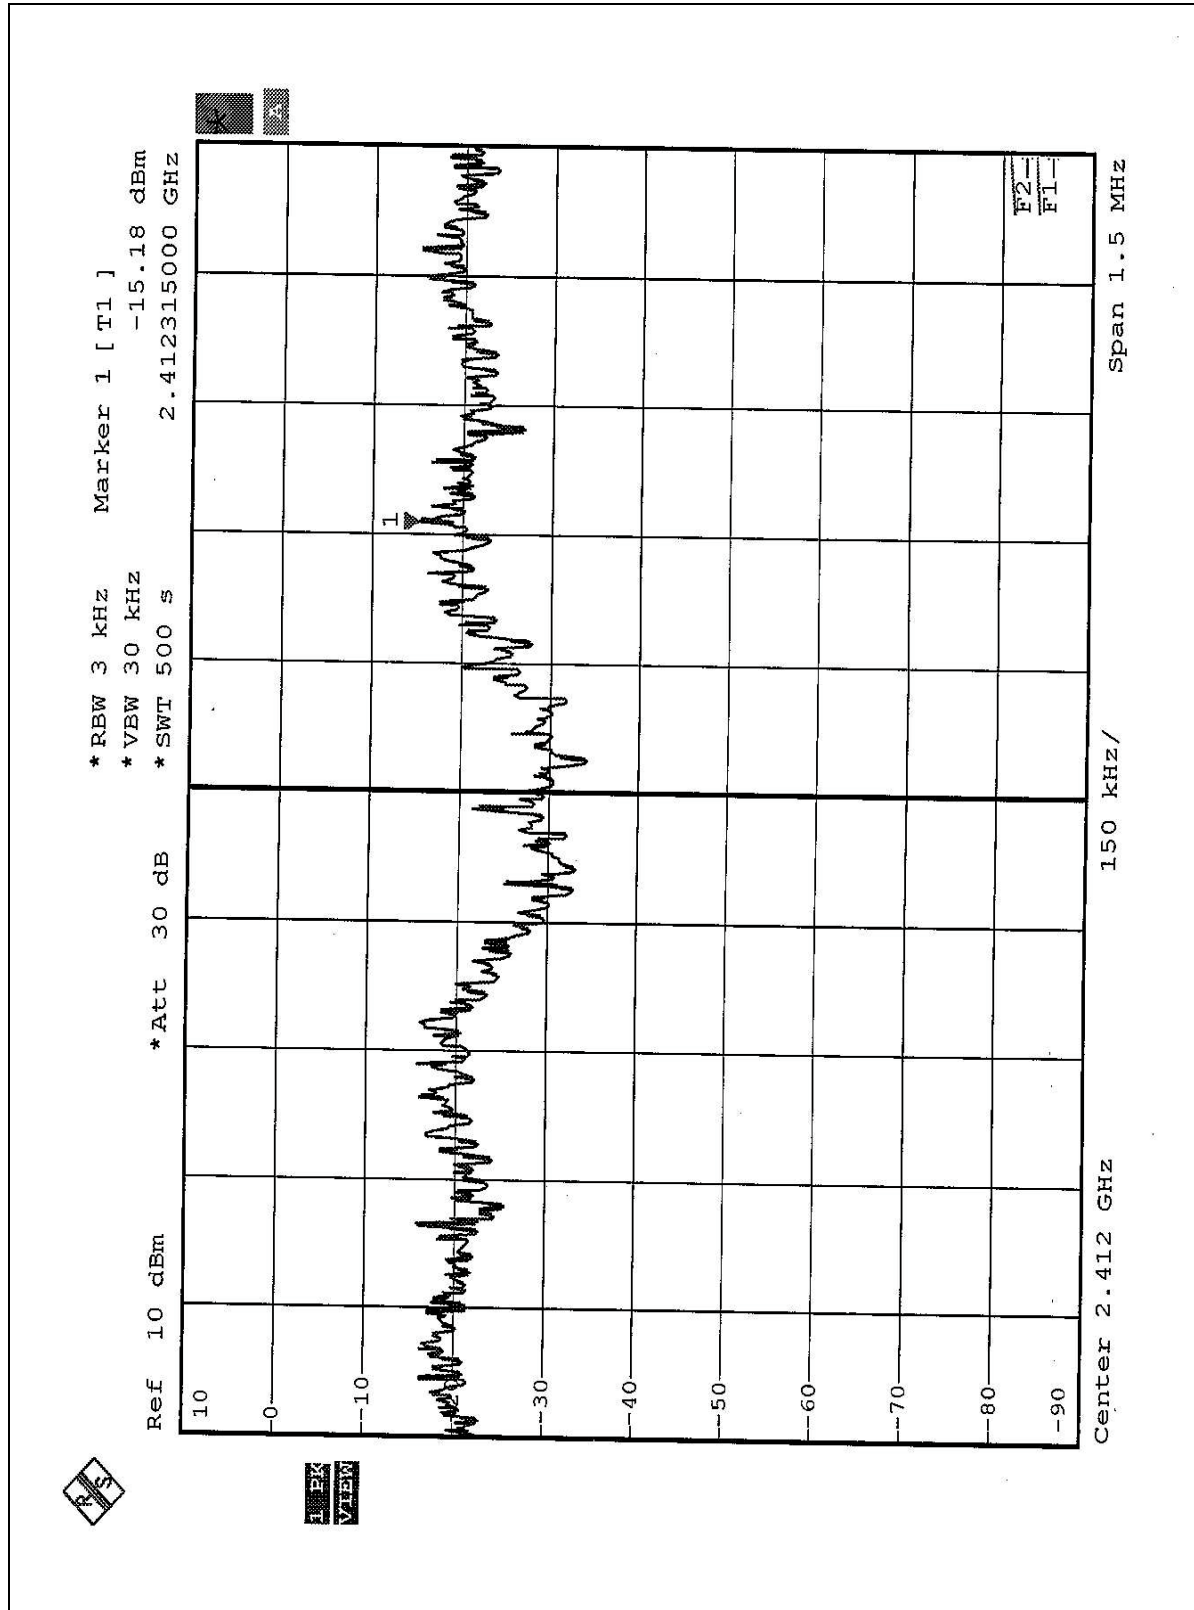




CH6

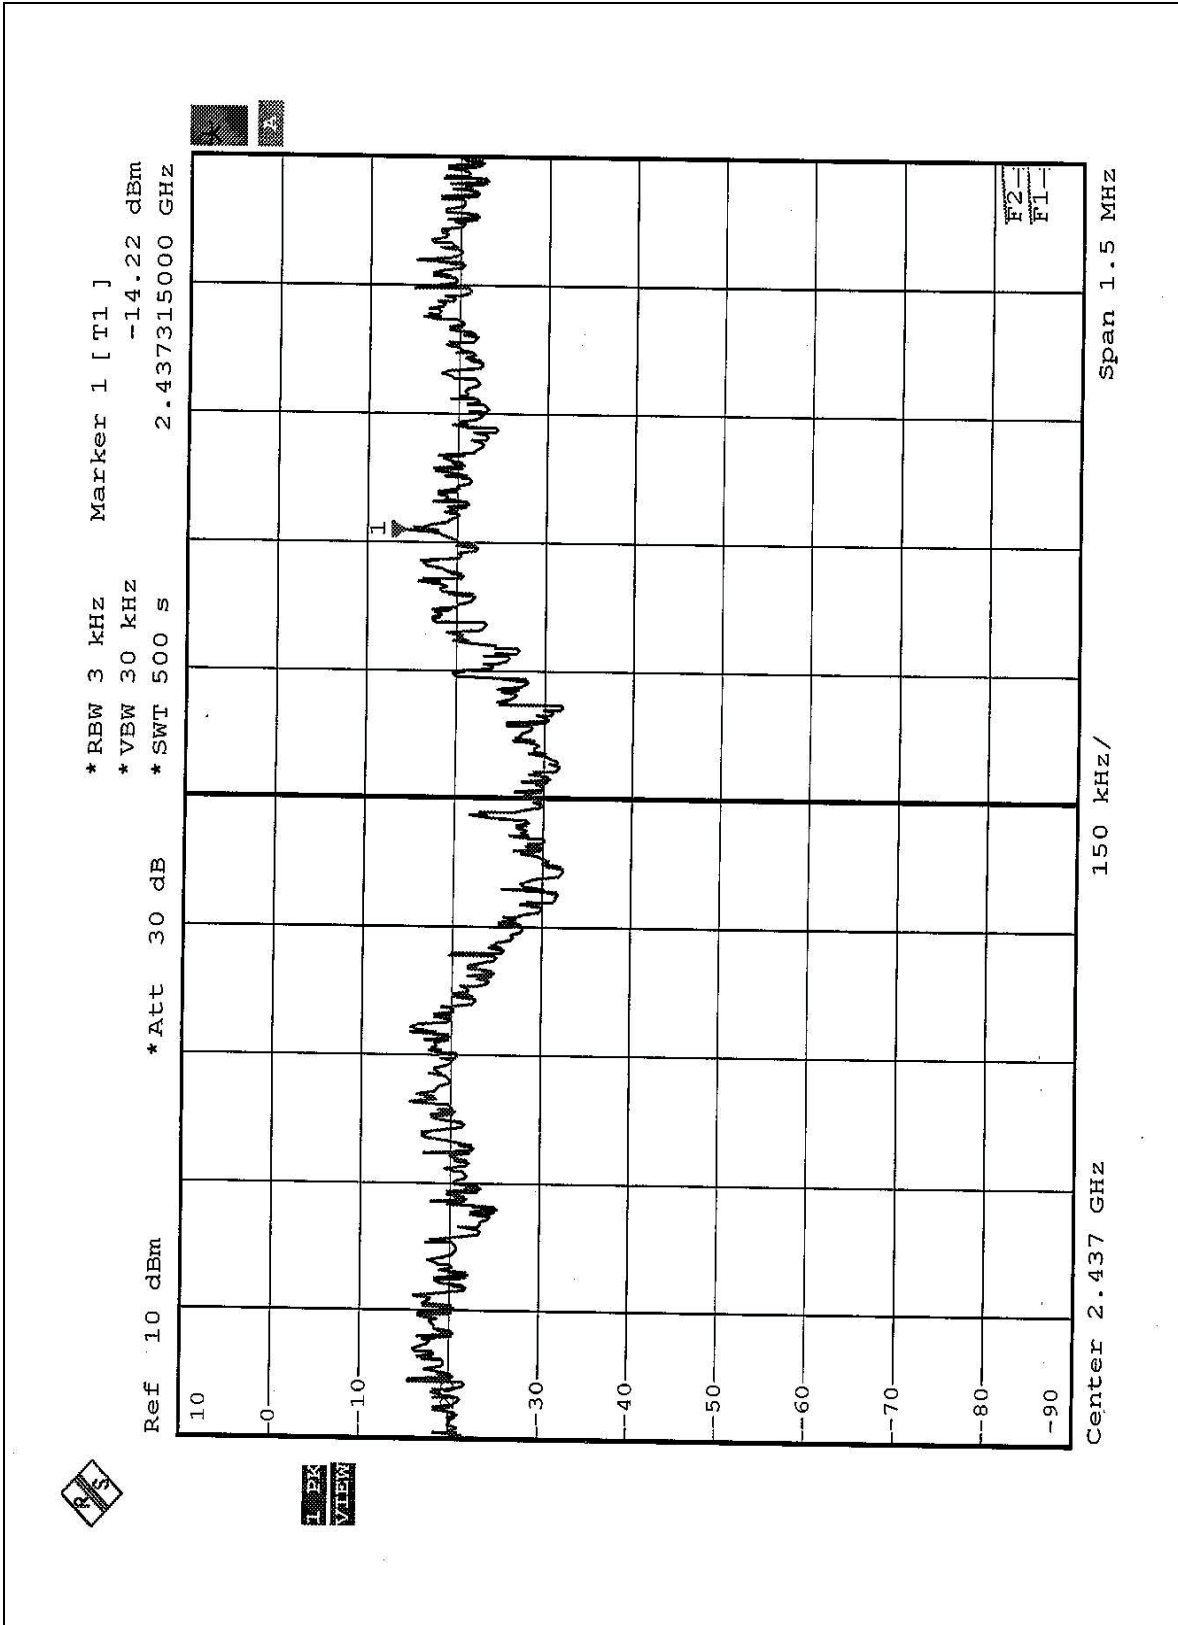



CH11

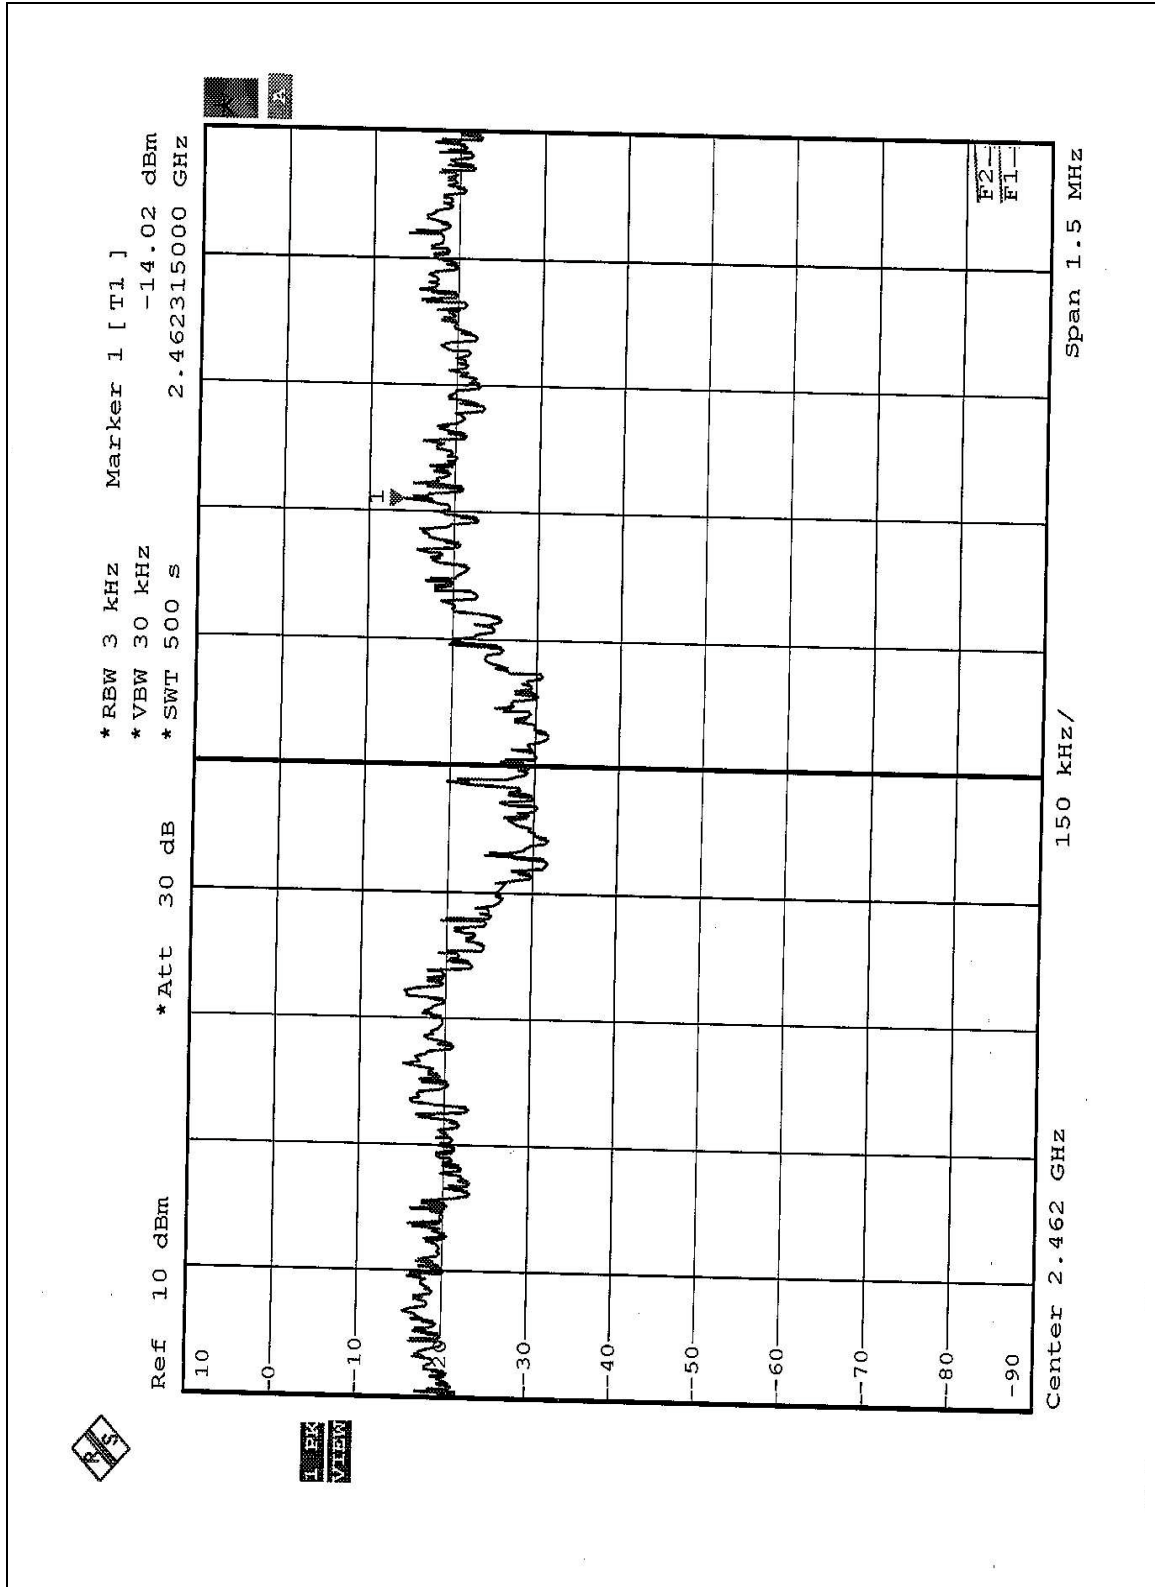



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6




4.6.6 TEST RESULTS (A)


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE:


The band edge emission plot on the following 1-2 pages shows 52.26dB delta between carrier maximum power and local maximum emission in restrict band (2.3874GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 101.82dBuV/m, so the maximum field strength in restrict band is $101.82-52.26=49.56$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following 3-4 pages shows 50.68dB delta between carrier maximum power and local maximum emission in restrict band (2.4834GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 102.58dBuV/m, so the maximum field strength in restrict band is $102.58-50.68=51.90$ dBuV/m which is under 54 dBuV/m limit.

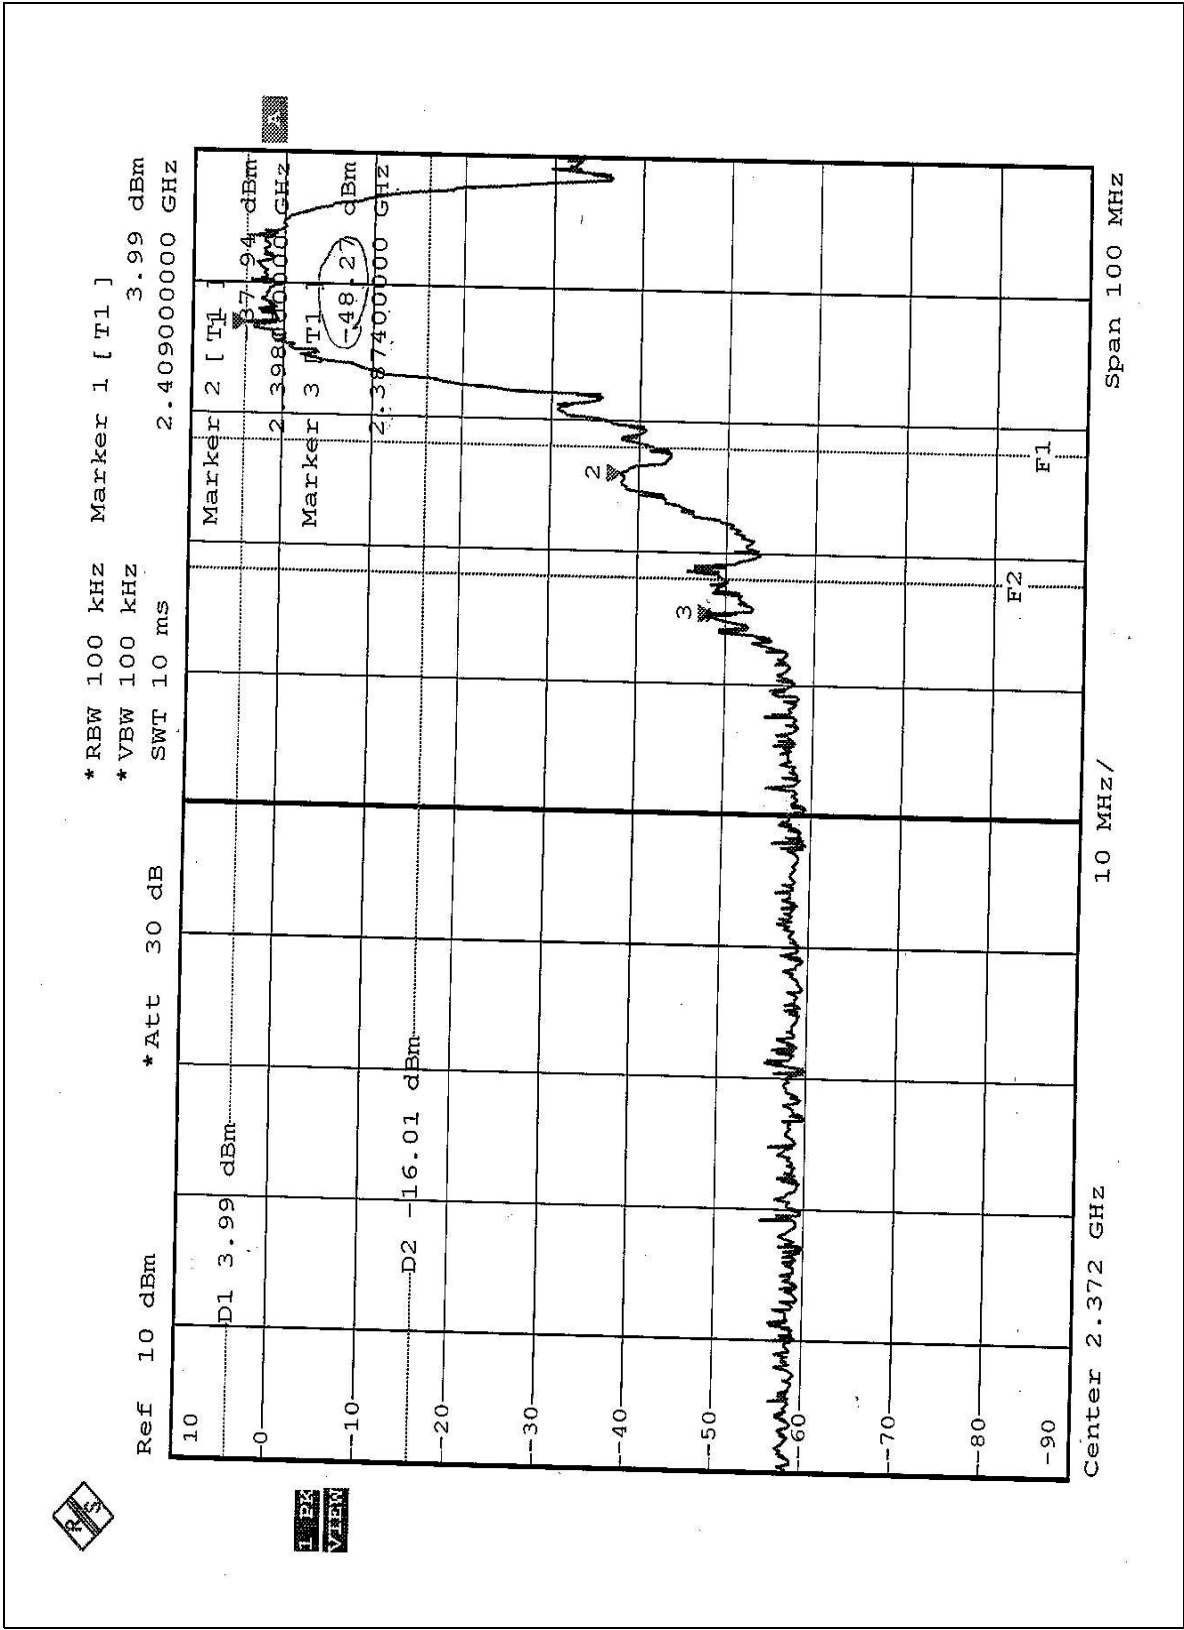

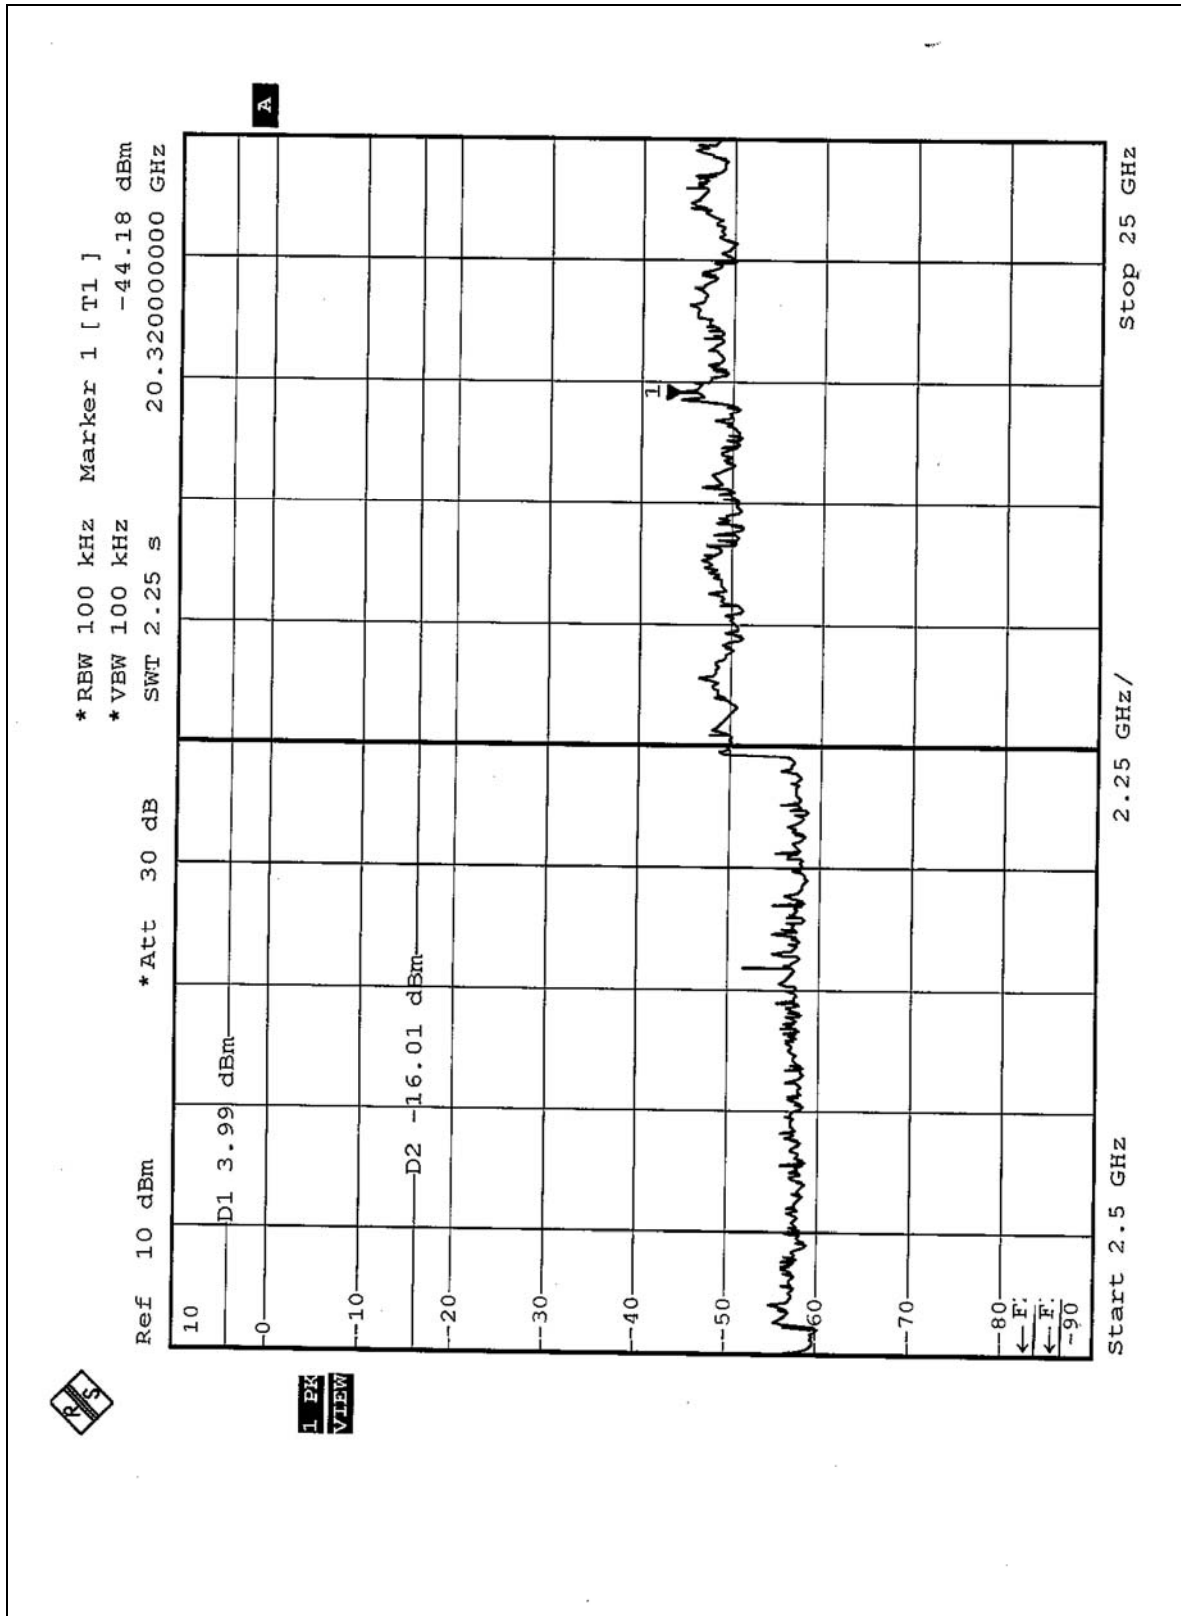

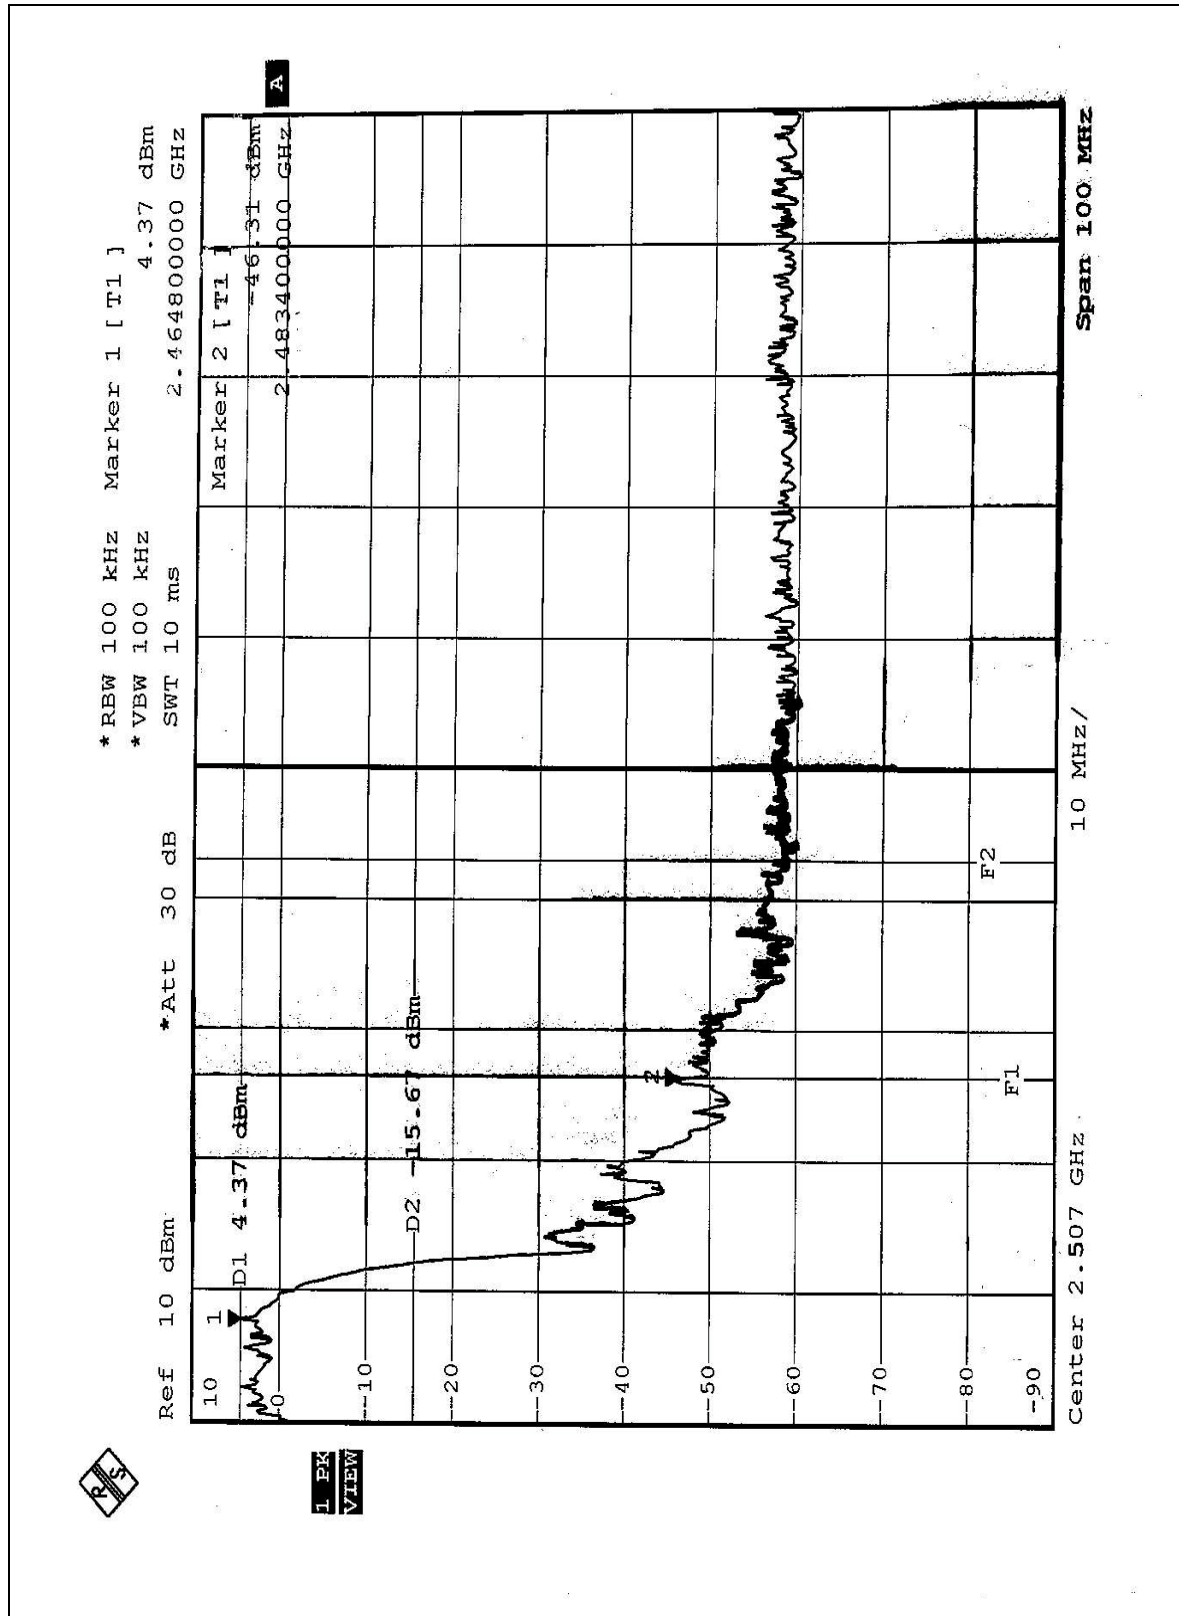

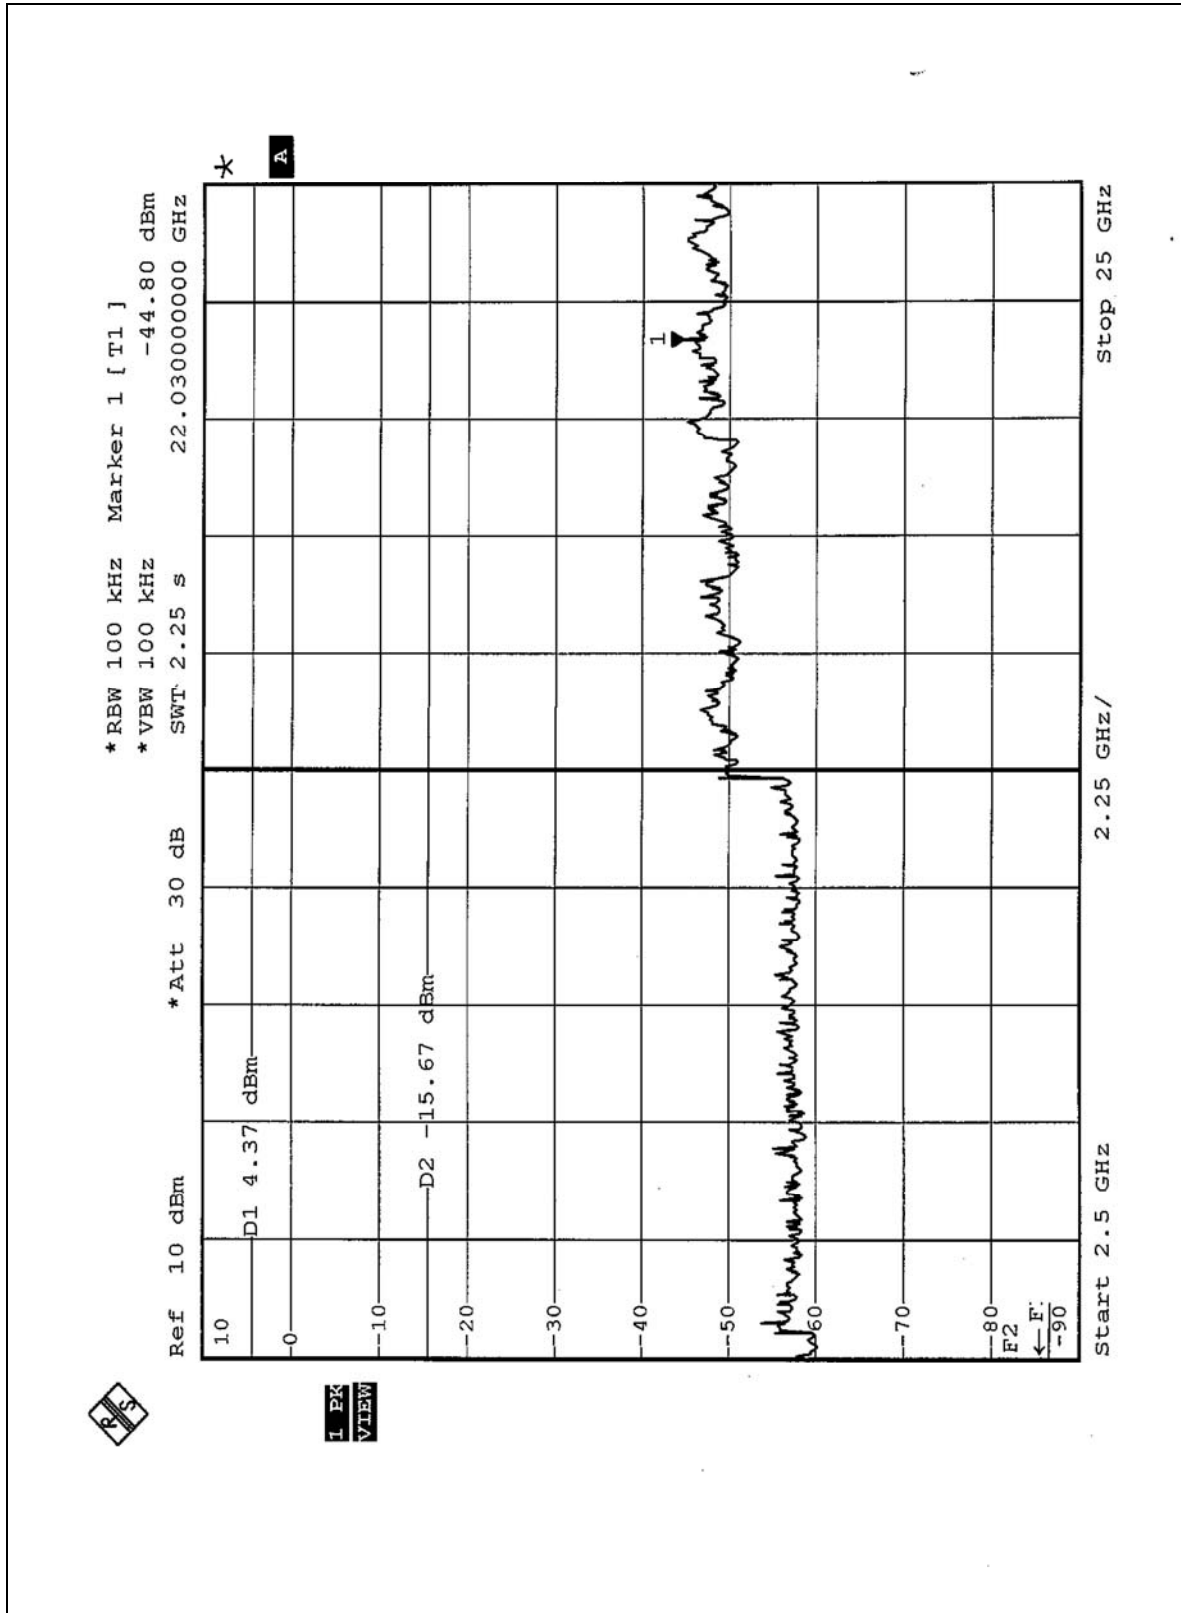




4.6.7 TEST RESULTS (B)


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE:


The band edge emission plot on the following 1-2 pages shows 48.66dB delta between carrier maximum power and local maximum emission in restrict band (2.3898GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 95.11dBuV/m, so the maximum field strength in restrict band is $95.11 - 48.66 = 46.45$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following 3-4 pages shows 48.10dB delta between carrier maximum power and local maximum emission in restrict band (2.4838GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 92.54dBuV/m, so the maximum field strength in restrict band is $92.54 - 48.10 = 44.44$ dBuV/m which is under 54 dBuV/m limit.

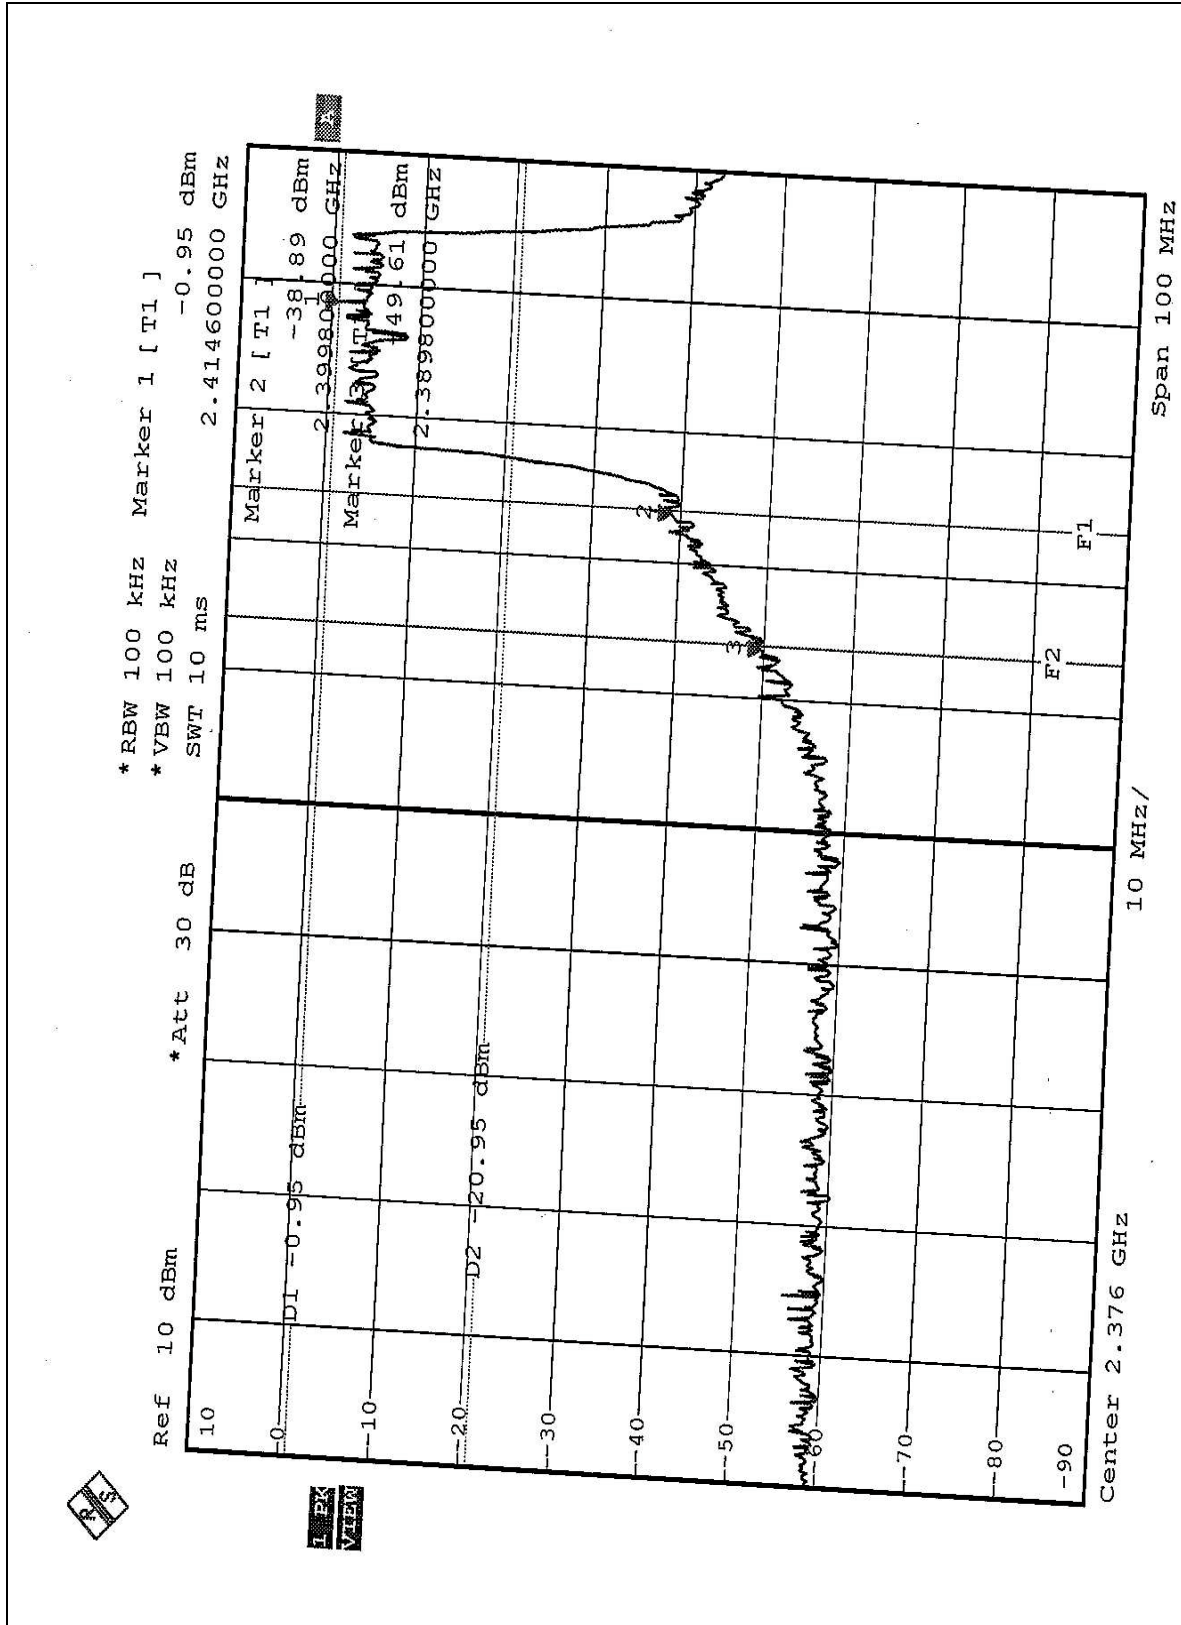

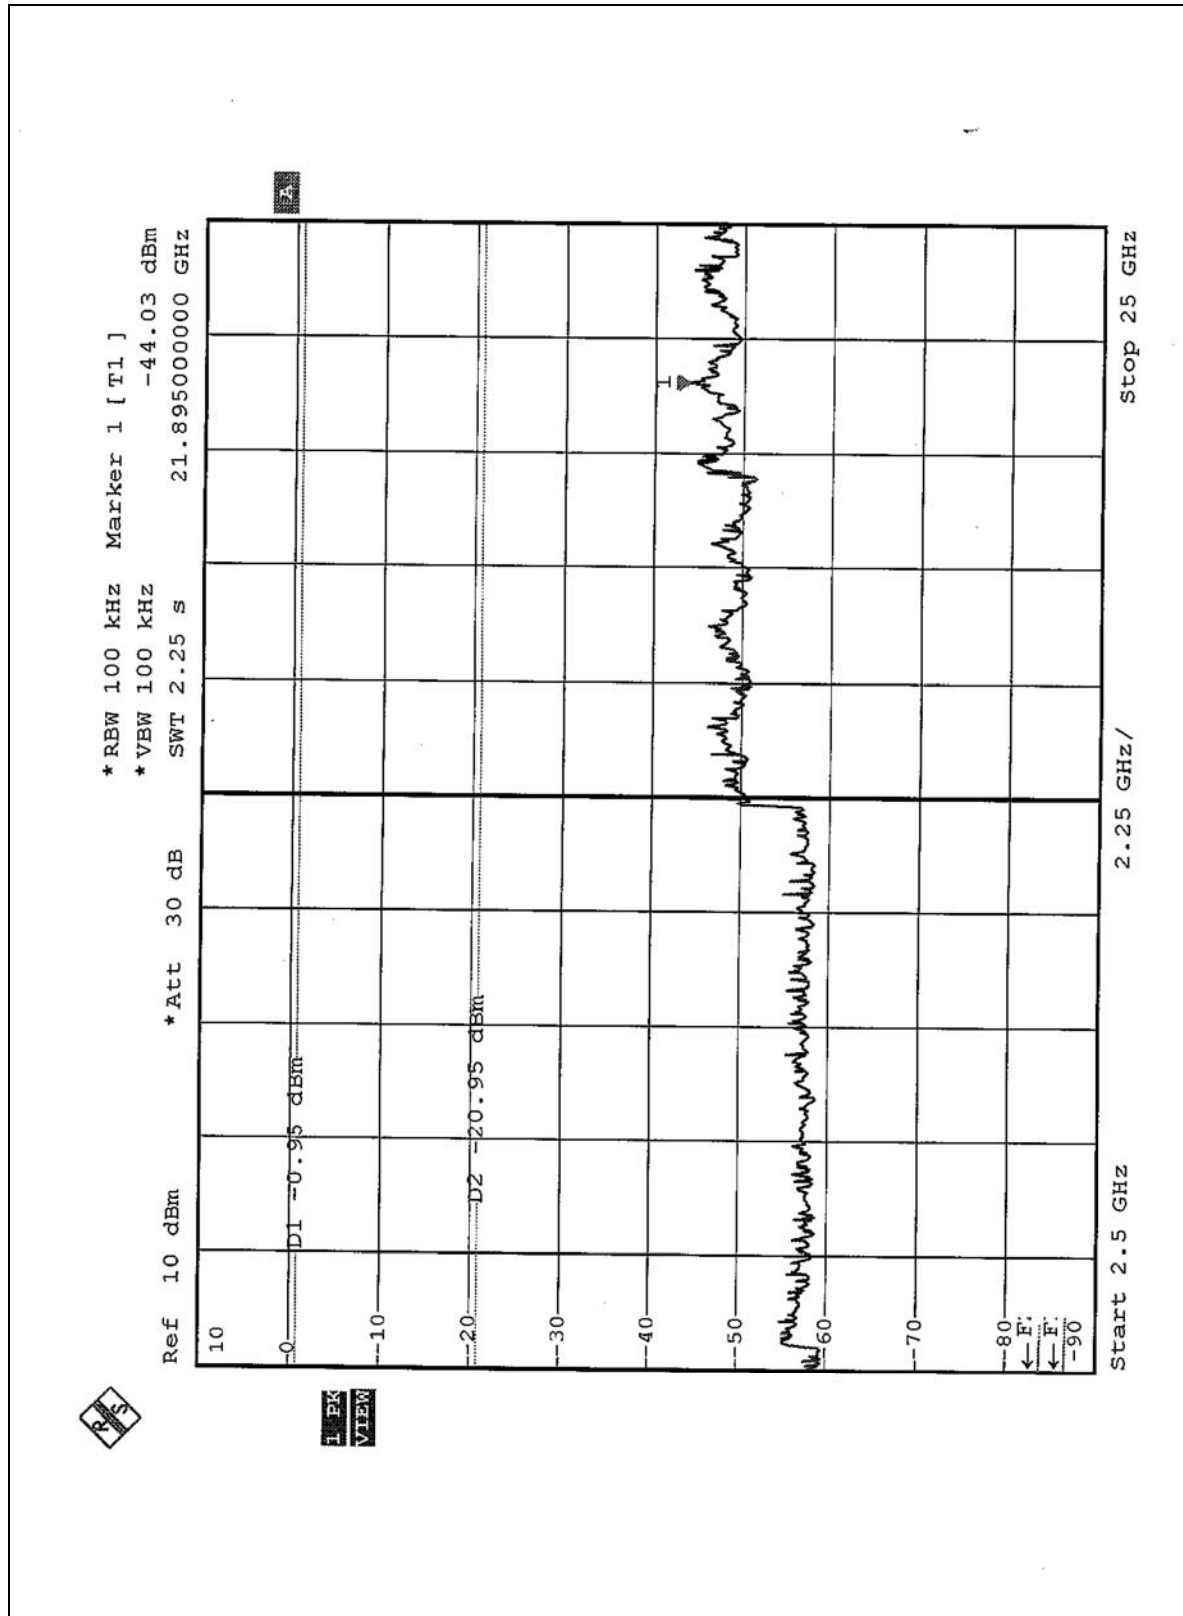

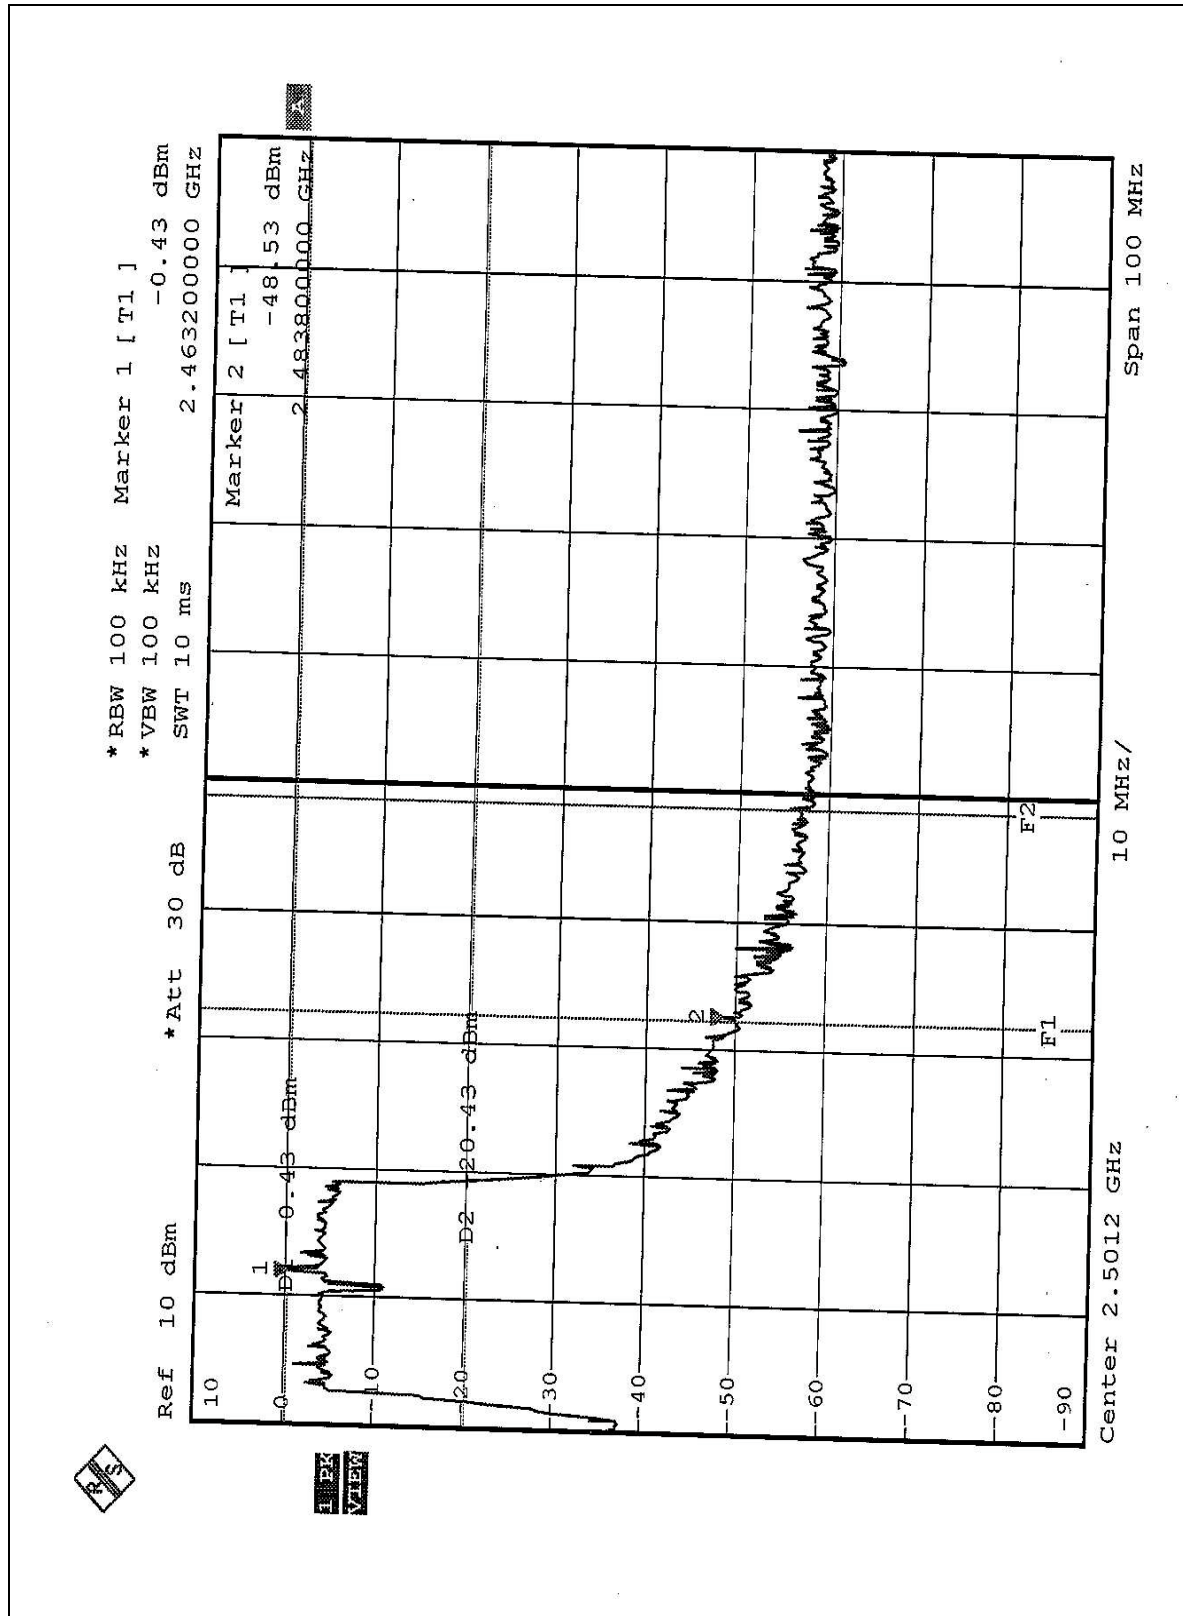

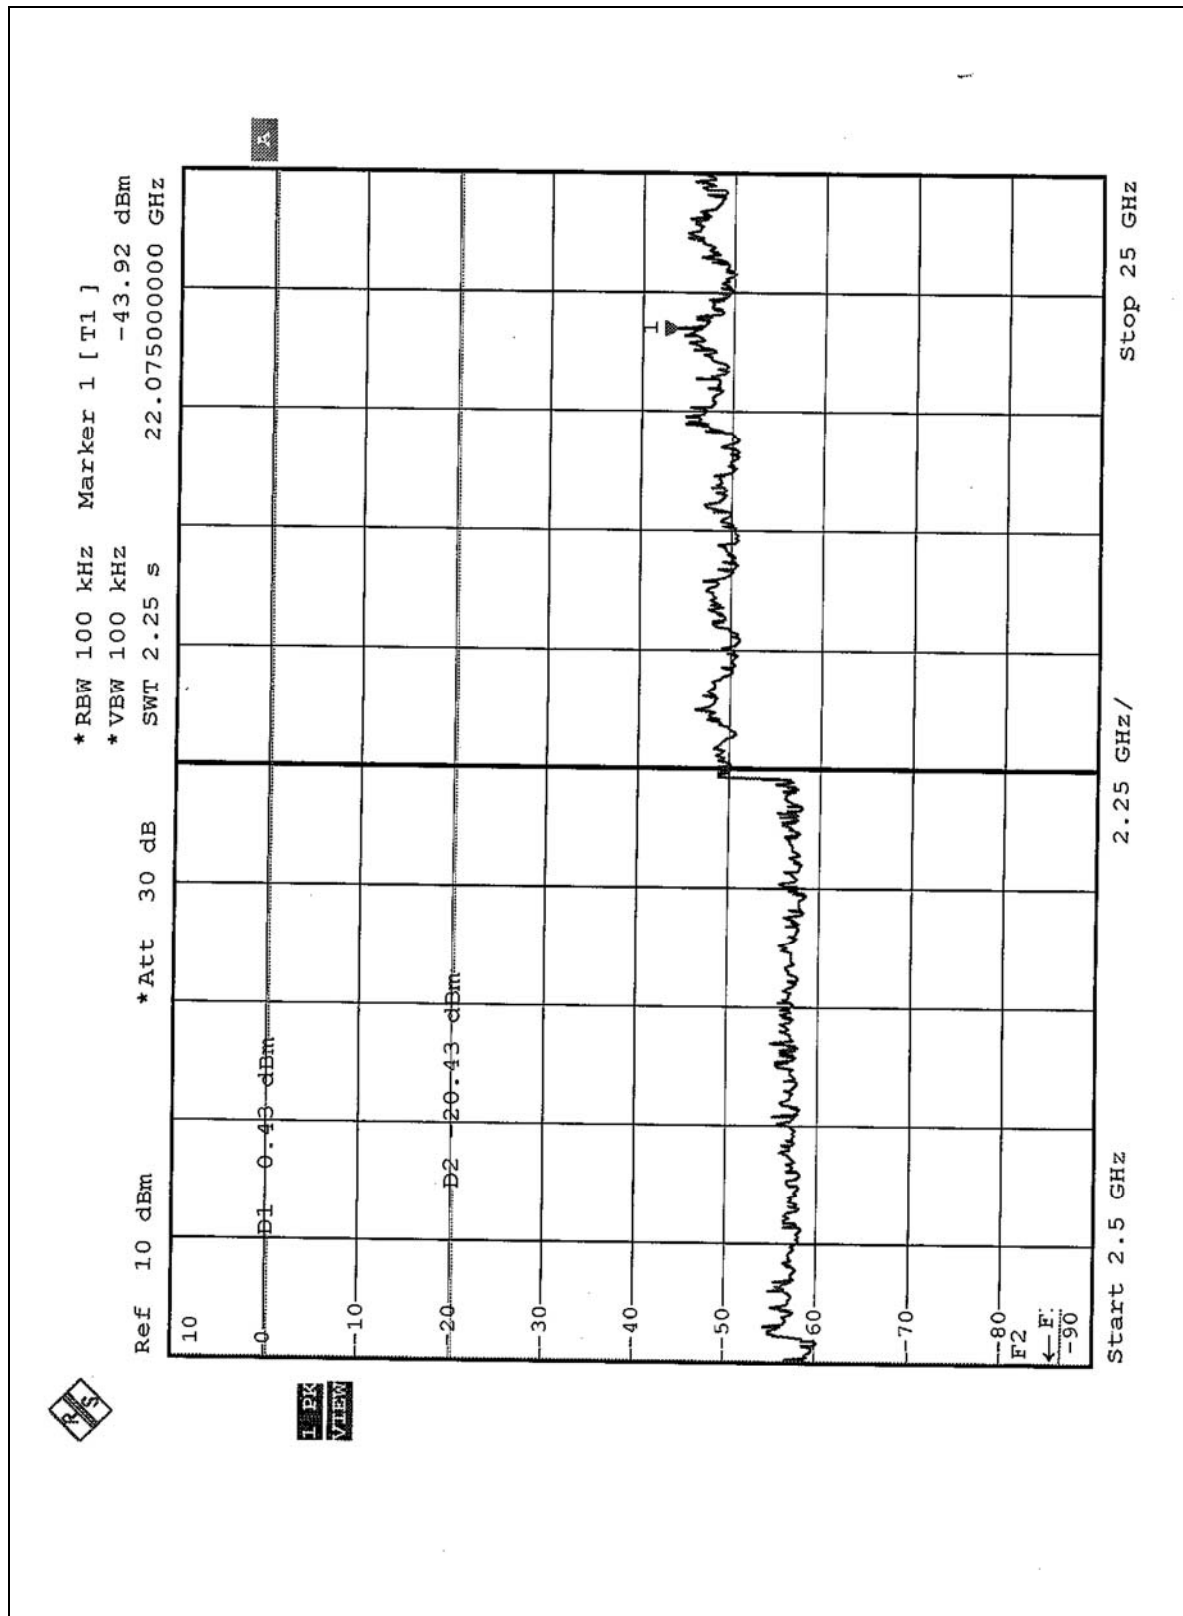



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed Dipole antenna without any antenna connector. And the maximum Gain of this antenna is 0dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.0