



FCC DoC TEST REPORT

REPORT NO.: D920829R02A

MODEL NO.: TEW-410APBplus

RECEIVED: August 18, 2003

TESTED: August 18, 2003 for low frequency test

January 05, 2004 ~ January 27, 2004 for other test

APPLICANT: TRENDware International Inc.

ADDRESS: 3135 Kashiwa Street
Torrance, CA 90505, USA

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 28 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



LAB CODE: 200102-0



Table of Contents

| | | |
|-------|--|----|
| 1 | CERTIFICATION | 3 |
| 2 | SUMMARY OF TEST RESULTS | 4 |
| 3 | GENERAL INFORMATION | 5 |
| 3.1 | GENERAL DESCRIPTION OF EUT | 5 |
| 3.2 | DESCRIPTION OF TEST MODES | 6 |
| 3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS | 6 |
| 3.4 | DESCRIPTION OF SUPPORT UNITS | 7 |
| 3.5 | CONFIGURATION OF SYSTEM UNDER TEST | 8 |
| 4 | TEST TYPES AND RESULTS | 8 |
| 4.1 | CONDUCTED EMISSION MEASUREMENT | 9 |
| 4.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT | 9 |
| 4.1.2 | TEST INSTRUMENTS | 9 |
| 4.1.3 | TEST PROCEDURES | 10 |
| 4.1.4 | DEVIATION FROM TEST STANDARD | 10 |
| 4.1.5 | TEST SETUP | 11 |
| 4.1.6 | EUT OPERATING CONDITIONS | 11 |
| 4.1.7 | TEST RESULTS | 12 |
| 4.2 | RADIATED EMISSION MEASUREMENT | 18 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 18 |
| 4.2.2 | TEST INSTRUMENTS | 19 |
| 4.2.3 | TEST PROCEDURES | 20 |
| 4.2.4 | DEVIATION FROM TEST STANDARD | 20 |
| 4.2.5 | TEST SETUP | 21 |
| 4.2.6 | EUT OPERATING CONDITIONS | 21 |
| 4.2.7 | TEST RESULTS | 22 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION | 26 |
| 6 | INFORMATION ON THE TESTING LABORATORIES | 28 |



1 CERTIFICATION

PRODUCT : 125/54Mbps 11g Wireless Access Point with Bridge
MODEL NO.: TEW-410APBplus
BRAND NAME : TRENDnet
APPLICANT : TRENDware International Inc. USA
TEST ITEM : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart B, Class B
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on August 18, 2003 and from January 05, 2004 to January 27, 2004. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Stacy Hsueh. , **DATE:** February 27, 2004
Stacy Hsueh

APPROVED BY: Ellis Wu , **DATE:** February 27, 2004
Ellis Wu / Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| Standard Section | Test Type | Result | Remarks |
|------------------------------------|--------------------|--------|--|
| FCC Part 15, Subpart B, class B | Conducted Emission | PASS | Meet the requirement of limit Minimum passing margin is -20.42dB at 0.451MHz |
| | Radiated Emissions | PASS | Meet the requirement of limit Minimum passing margin is -2.11dB at 47.49MHz |

NOTE: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|---------------------------|--|
| PRODUCT | 125/54Mbps Wireless Access Point with Bridge |
| MODEL NO. | TEW-410APBplus |
| BRAND NO. | TRENDnet |
| POWER SUPPLY | 12.0Vdc from power adapter |
| MODULATION TYPE | BPSK, QPSK, CCK, 16QAM, 64QAM |
| RADIO TECHNOLOGY | DSSS, OFDM |
| TRANSFER RATE | 1/2/5.5/6/9/11/12/18/24/36/48/54Mbps |
| FREQUENCY RANGE | 2412MHz ~ 2462MHz |
| NUMBER OF CHANNEL | 11 |
| OUTPUT POWER | 11b:15.86dBm 11g:14.96dBm |
| ANTENNA TYPE | dipole antenna with 2.0dBi gain |
| DATA CABLE | NA |
| I/O PORTS | RJ45(1.5m nonshielded) |
| ASSOCIATED DEVICES | NA |

NOTE:

- The EUT were powered by the following adapter:

| | |
|-----------------|--------------------------------|
| BRAND : | RONG-HORNG ELECTRONIC CO., LTD |
| MODEL : | RH41-1200500DU |
| INPUT : | 120Vac, 60Hz |
| OUTPUT : | 12Vdc, 500mA |

- The EUT operates in the 2.4GHz frequency spectrum and compatible with the draft 802.11g standard to provide a wireless data rate of up to 54Mbps.
- Model TEW-410APBplus

| Brand name | Model | Product name |
|------------|----------------|--|
| TRENDnet | TEW-410APBplus | 125/54Mbps Wireless Access Point with Bridge |

- For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1 | 2412 MHz | 7 | 2442 MHz |
| 2 | 2417 MHz | 8 | 2447 MHz |
| 3 | 2422 MHz | 9 | 2452 MHz |
| 4 | 2427 MHz | 10 | 2457 MHz |
| 5 | 2432 MHz | 11 | 2462 MHz |
| 6 | 2437 MHz | | |

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate at 6Mbps with OFDM technique, the worst case, was chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 54Mbps Wireless Access Point with Bridge.
According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart B, Class B
ANSI C63.4-1992

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-------------------|--------|-----------|--------------------------|------------------|
| 1 | NOTEBOOK | DELL | PP01L | TW-0791UH-12800-123-5423 | FCC DoC Approved |
| 2 | NOTEBOOK | DELL | PP01L | TW-0791UH-12800-114-2290 | FCC DoC Approved |
| 3 | WIRELESS LAN CARD | D-Link | G650 | NA | NA |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |
| 2 | NA |
| 3 | NA |

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 act as a communication partner and transfer data.

3.5 CONFIGURATION OF SYSTEM UNDER TEST

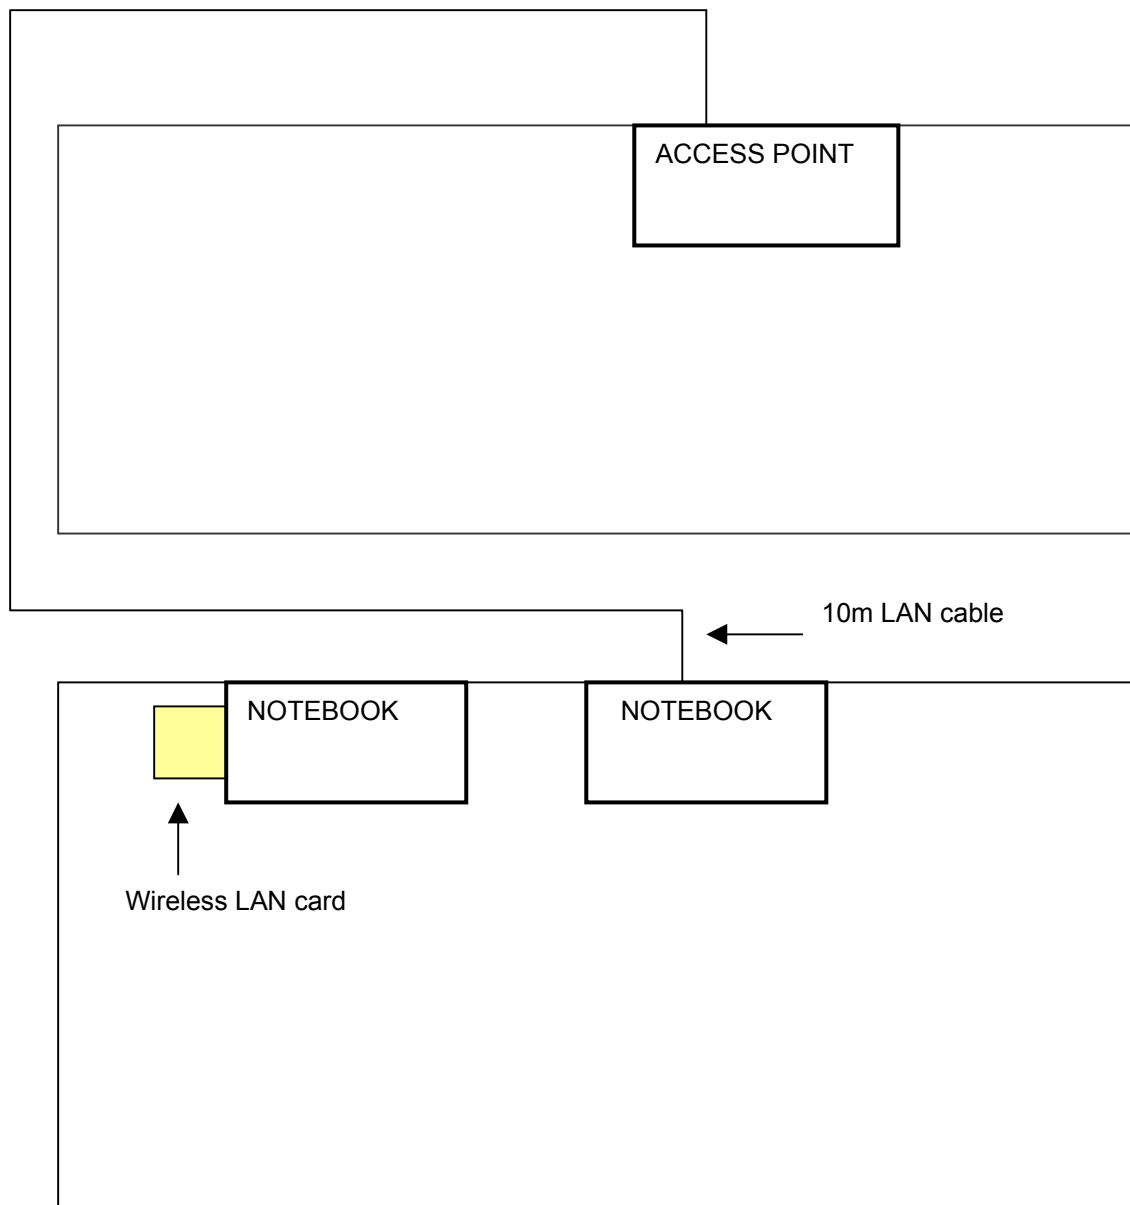

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--|------------|--------------|------------------|
| ROHDE & SCHWARZ Test Receiver | ESCS 30 | 838251/021 | Jan. 04, 2005 |
| ROHDE & SCHWARZ Artificial Mains Network (for EUT) | ESH3-Z5 | 100218 | Dec. 09, 2004 |
| ROHDE & SCHWARZ Artificial Mains Network (for peripherals) | ESH3-Z5 | 100219 | Dec. 09, 2004 |
| ROHDE & SCHWARZ Artificial Mains Network (for peripherals) | ESH3-Z5 | 100220 | Dec. 09, 2004 |
| *ROHDE & SCHWARZ 4-wire ISN | ENY41 | 837032/016 | Nov. 19, 2004 |
| *ROHDE & SCHWARZ 2-wire ISN | ENY22 | 837497/016 | Nov. 19, 2004 |
| Software | Cond-V2M3 | NA | NA |
| RF cable (JYEBAO) | 5D-FB | Cable-C10.01 | May 01, 2004 |
| SUHNER Terminator (For ROHDE & SCHWARZ LISN) | 65BNC-5001 | E1-010770 | Mar. 24, 2004 |
| SUHNER Terminator (For ROHDE & SCHWARZ LISN) | 65BNC-5001 | E1-010773 | Apr. 06, 2004 |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

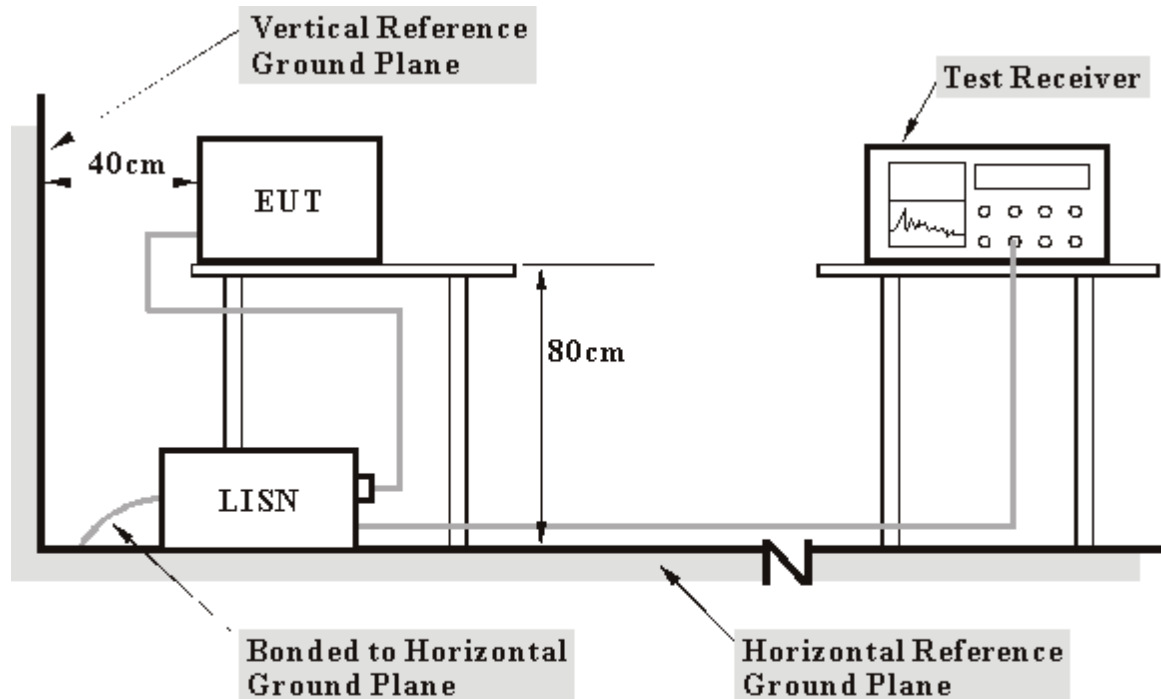

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared another notebook system to act as a communication partner and placed it outside of testing area.
- c. The communication partner ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- d. The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

| | | | |
|---------------------------------|--|-----------------------------|-------------|
| EUT | 125/54Mbps 11g Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 16deg.C, 60%RH, 991hPa | TESTED BY: Steven Lu | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.181 | 0.10 | 42.53 | - | 42.63 | - | 64.43 | 54.43 | -21.80 | - |
| 2 | 0.478 | 0.11 | 33.51 | - | 33.62 | - | 56.37 | 46.37 | -22.75 | - |
| 3 | 0.839 | 0.17 | 26.01 | - | 26.18 | - | 56.00 | 46.00 | -29.82 | - |
| 4 | 1.203 | 0.20 | 14.22 | - | 14.42 | - | 56.00 | 46.00 | -41.58 | - |
| 5 | 4.625 | 0.33 | 32.29 | - | 32.62 | - | 56.00 | 46.00 | -23.38 | - |
| 6 | 25.871 | 1.20 | 24.76 | - | 25.96 | - | 60.00 | 50.00 | -34.04 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

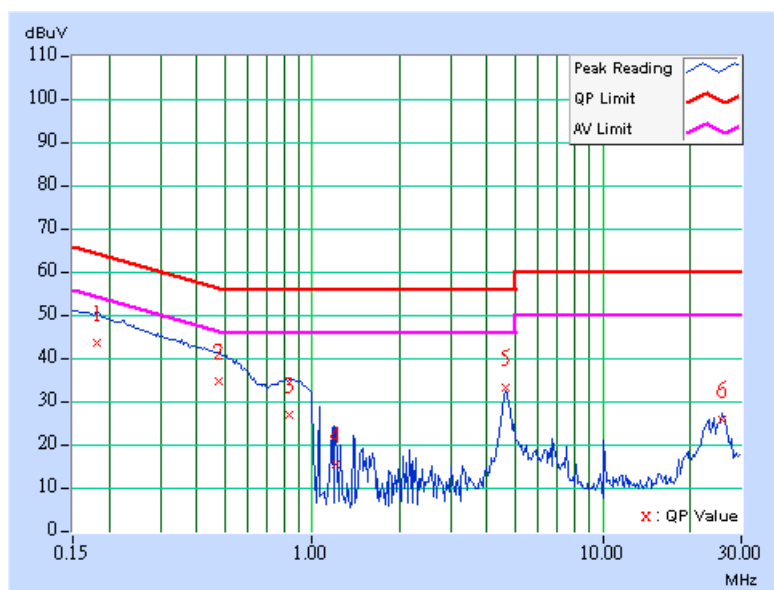

| | | | |
|---------------------------------|--|-----------------------------|-------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 16deg.C, 60%RH, 991hPa | TESTED BY: Steven Lu | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.179 | 0.10 | 43.49 | - | 43.59 | - | 64.51 | 54.51 | -20.92 | - |
| 2 | 0.447 | 0.11 | 36.26 | - | 36.37 | - | 56.93 | 46.93 | -20.57 | - |
| 3 | 0.861 | 0.18 | 24.97 | - | 25.15 | - | 56.00 | 46.00 | -30.85 | - |
| 4 | 1.141 | 0.20 | 8.75 | - | 8.95 | - | 56.00 | 46.00 | -47.05 | - |
| 5 | 4.625 | 0.32 | 28.79 | - | 29.11 | - | 56.00 | 46.00 | -26.89 | - |
| 6 | 25.938 | 1.00 | 17.73 | - | 18.73 | - | 60.00 | 50.00 | -41.27 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

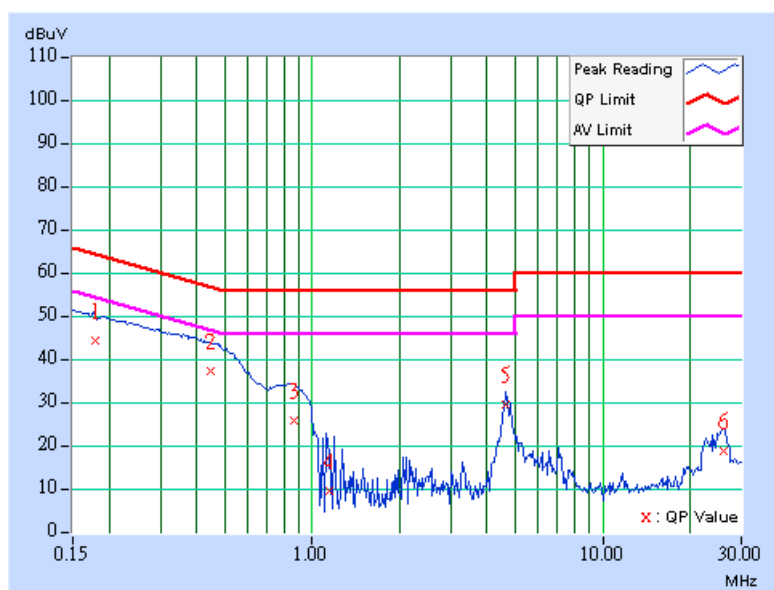

| | | | |
|---------------------------------|--|-----------------------------|-------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 16deg.C, 60%RH, 991hPa | TESTED BY: Steven Lu | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.180 | 0.10 | 42.75 | - | 42.85 | - | 64.51 | 54.51 | -21.66 | - |
| 2 | 0.420 | 0.10 | 35.43 | - | 35.53 | - | 57.46 | 47.46 | -21.92 | - |
| 3 | 0.844 | 0.17 | 26.28 | - | 26.45 | - | 56.00 | 46.00 | -29.55 | - |
| 4 | 1.140 | 0.20 | 15.26 | - | 15.46 | - | 56.00 | 46.00 | -40.54 | - |
| 5 | 4.680 | 0.33 | 31.20 | - | 31.53 | - | 56.00 | 46.00 | -24.47 | - |
| 6 | 25.813 | 1.20 | 26.20 | - | 27.40 | - | 60.00 | 50.00 | -32.60 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

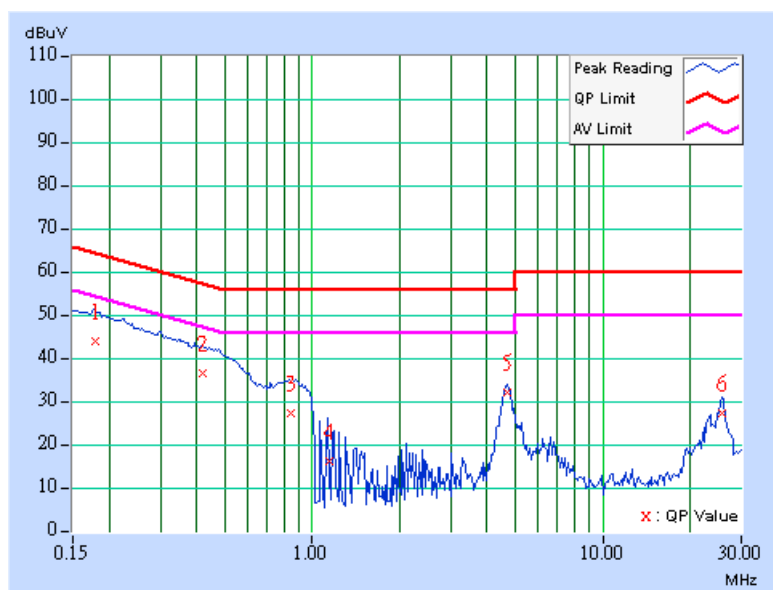

| | | | |
|---------------------------------|--|-----------------------------|-------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 16deg.C, 60%RH, 991hPa | TESTED BY: Steven Lu | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|--------------|----------------|-------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.181 | 0.10 | 42.71 | - | 42.81 | - | 64.43 |
| 2 | 0.451 | 0.11 | 36.33 | - | 36.44 | - | 56.86 | 46.86 | -20.42 | - |
| 3 | 0.841 | 0.17 | 25.52 | - | 25.69 | - | 56.00 | 46.00 | -30.31 | - |
| 4 | 2.160 | 0.21 | 10.87 | - | 11.08 | - | 56.00 | 46.00 | -44.92 | - |
| 5 | 4.621 | 0.32 | 24.49 | - | 24.81 | - | 56.00 | 46.00 | -31.19 | - |
| 6 | 25.574 | 1.00 | 23.89 | - | 24.89 | - | 60.00 | 50.00 | -35.11 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

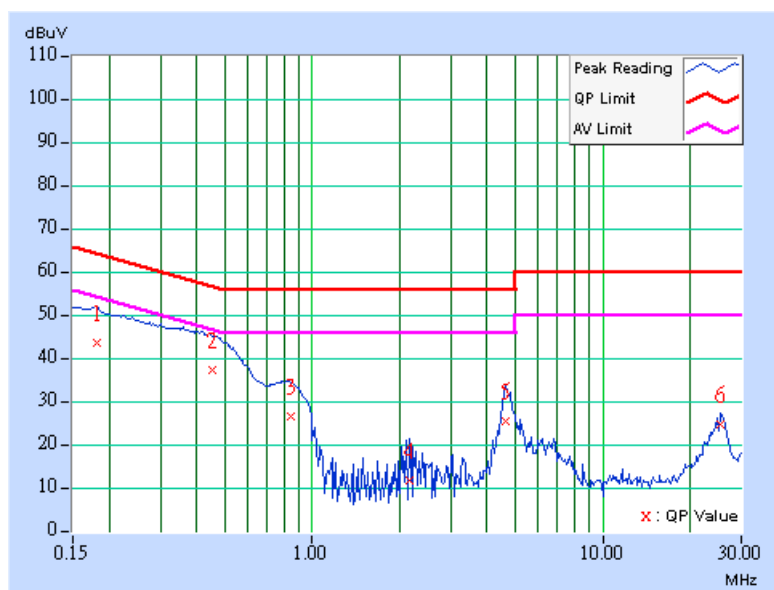

| | | | |
|---------------------------------|--|-----------------------------|-------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 16deg.C, 60%RH, 991hPa | TESTED BY: Steven Lu | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.177 | 0.10 | 42.57 | - | 42.67 | - | 64.61 | 54.61 | -21.94 | - |
| 2 | 0.359 | 0.10 | 37.13 | - | 37.23 | - | 58.75 | 48.75 | -21.52 | - |
| 3 | 0.824 | 0.17 | 25.99 | - | 26.16 | - | 56.00 | 46.00 | -29.84 | - |
| 4 | 1.078 | 0.20 | 15.36 | - | 15.56 | - | 56.00 | 46.00 | -40.44 | - |
| 5 | 4.625 | 0.33 | 22.33 | - | 22.66 | - | 56.00 | 46.00 | -33.34 | - |
| 6 | 25.813 | 1.20 | 25.53 | - | 26.73 | - | 60.00 | 50.00 | -33.27 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

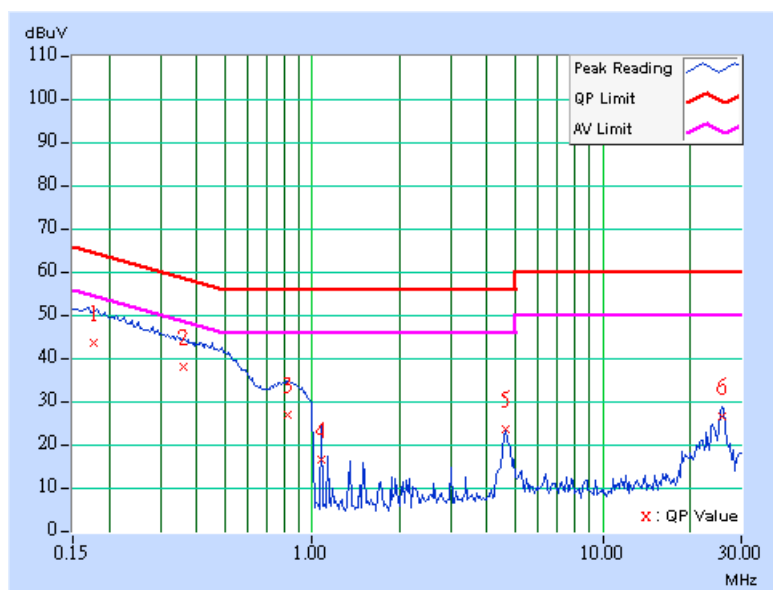

| | | | |
|---------------------------------|--|----------------------|-------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 16deg.C, 60%RH, 991hPa | TESTED BY: | Steven Lu |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-------|--------------------------|-------|-----------------|-------|-------------|-------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.181 | 0.10 | 42.45 | - | 42.55 | - | 64.43 |
| 2 | 0.449 | 0.11 | 36.15 | - | 36.26 | - | 56.89 | 46.89 | -20.63 | - |
| 3 | 0.841 | 0.17 | 25.52 | - | 25.69 | - | 56.00 | 46.00 | -30.31 | - |
| 4 | 1.200 | 0.20 | 7.25 | - | 7.45 | - | 56.00 | 46.00 | -48.55 | - |
| 5 | 4.621 | 0.32 | 23.73 | - | 24.05 | - | 56.00 | 46.00 | -31.95 | - |
| 6 | 26.113 | 1.00 | 22.91 | - | 23.91 | - | 60.00 | 50.00 | -36.09 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

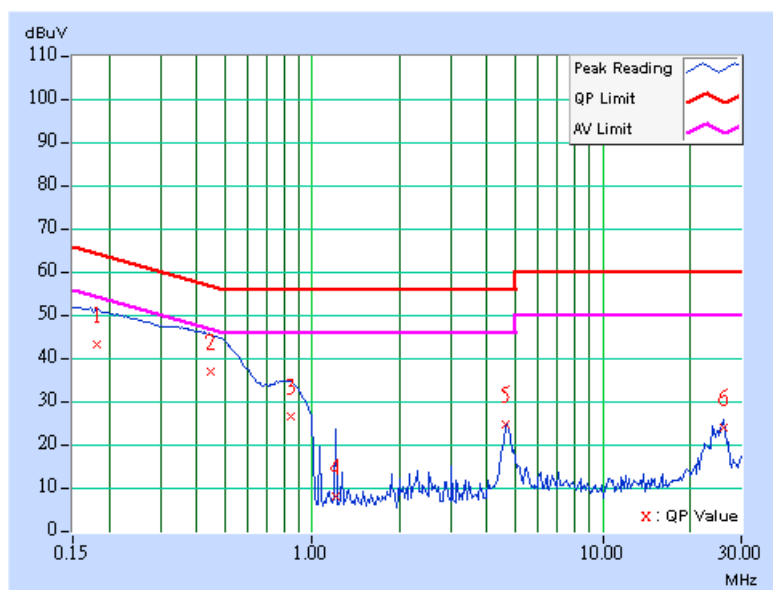

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.109 as following:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED ON |
|------------------------------------|------------------------|--------------------------|---------------|
| * HP Spectrum Analyzer | 8590L | 3544A01176 | Jun. 10, 2004 |
| * HP Preamplifier | 8447D | 2944A08485 | May 01, 2004 |
| * HP Spectrum Analyzer | 8593E | 3926A04191 | Mar. 24, 2004 |
| * HP Preamplifier | 8449B | 3008A01292 | Aug. 13, 2004 |
| ROHDE & SCHWARZ TEST RECEIVER | ESI7 | 838496/016 | Feb. 23, 2004 |
| * ROHDE & SCHWARZ TEST RECEIVER | ESMI | 839013/007 839379/002 | Feb. 13, 2004 |
| SCHAFFNER Tunable Dipole Antenna | VHBA 9123 | 459 | Jun. 26, 2004 |
| SCHWARZBECK Tunable Dipole Antenna | UHA 9105 | 977 | |
| * CHASE BILOG Antenna | CBL6112A | 2221 | Jul. 26, 2004 |
| * SCHWARZBECK Horn Antenna | BBHA9120-D1 | D130 | Jun. 30, 2004 |
| * EMCO Turn Table | 1060 | 1115 | NA |
| * CHANCE Tower | CM-AT40 | CM-A010 | NA |
| * Software | ADT_Radiate d_V5.14 | NA | NA |
| * ANRITSU RF Switches | MP59B | M35046 | Jan. 04, 2005 |
| * TIMES RF cable | LMR-600 | CABLE-ST5-01 | Jan. 04, 2005 |

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

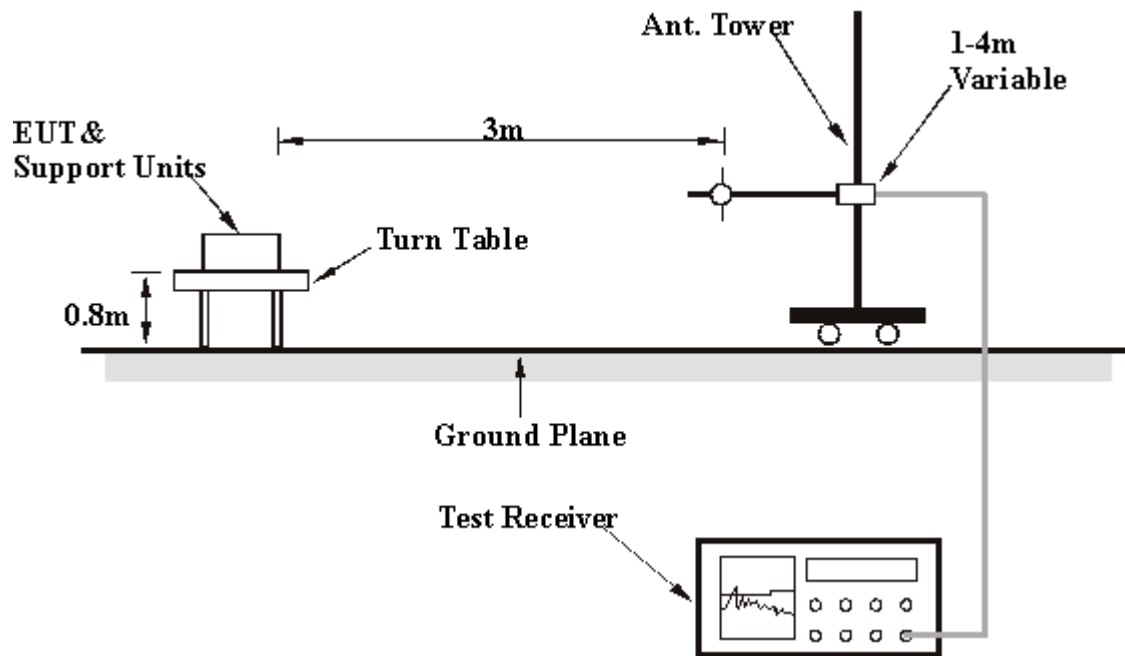

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

| | | | |
|---------------------------------|--|-------------------------------|---------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 11 | FREQUENCY RANGE | Below 1000MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 60%RH, 991hPa | TESTED BY: Vincent Lin | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 107.76 | 35.38 QP | 43.50 | -8.12 | 1.12 H | 60 | 23.25 | 12.13 |
| 2 | 125.25 | 35.00 QP | 43.50 | -8.50 | 1.50 H | 100 | 22.19 | 12.81 |
| 3 | 249.66 | 37.29 QP | 46.00 | -8.71 | 1.00 H | 70 | 23.70 | 13.59 |
| 4 | 300.20 | 42.70 QP | 46.00 | -3.30 | 1.00 H | 262 | 27.04 | 15.66 |
| 5 | 399.34 | 40.41 QP | 46.00 | -5.59 | 1.00 H | 295 | 22.19 | 18.22 |
| 6 | 500.42 | 39.47 QP | 46.00 | -6.53 | 1.75 H | 247 | 19.33 | 20.14 |
| 7 | 552.91 | 36.55 QP | 46.00 | -9.45 | 1.50 H | 67 | 15.63 | 20.92 |
| 8 | 650.10 | 37.24 QP | 46.00 | -8.76 | 1.00 H | 199 | 14.79 | 22.45 |
| 9 | 700.64 | 39.60 QP | 46.00 | -6.40 | 1.00 H | 130 | 16.90 | 22.70 |
| 10 | 751.18 | 36.60 QP | 46.00 | -9.40 | 1.00 H | 142 | 12.73 | 23.87 |
| 11 | 900.86 | 41.73 QP | 46.00 | -4.27 | 1.00 H | 283 | 17.31 | 24.42 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----------|--------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 47.49 | 37.89 QP | 40.00 | -2.11 | 1.25 V | 277 | 27.29 | 10.60 |
| 2 | 64.99 | 37.47 QP | 40.00 | -2.53 | 1.00 V | 169 | 29.79 | 7.68 |
| 3 | 249.66 | 35.05 QP | 46.00 | -10.95 | 1.50 V | 154 | 21.46 | 13.59 |
| 4 | 300.02 | 39.82 QP | 46.00 | -6.18 | 1.25 V | 319 | 24.16 | 15.66 |
| 5 | 399.94 | 43.78 QP | 46.00 | -2.22 | 1.25 V | 319 | 25.54 | 18.24 |
| 6 | 411.00 | 41.40 QP | 46.00 | -4.60 | 1.00 V | 175 | 23.02 | 18.38 |
| 7 | 500.42 | 43.82 QP | 46.00 | -2.18 | 1.00 V | 100 | 23.68 | 20.14 |
| 8 | 549.02 | 38.78 QP | 46.00 | -7.22 | 1.00 V | 184 | 17.95 | 20.83 |
| 9 | 601.50 | 39.59 QP | 46.00 | -6.41 | 1.50 V | 190 | 17.30 | 22.29 |
| 10 | 900.86 | 41.80 QP | 46.00 | -4.20 | 1.00 V | 181 | 17.38 | 24.42 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| | | | |
|---------------------------------|--|-------------------------------|--------------------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25 GHz |
| MODE | CCK | | |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 60%RH, 991hPa | TESTED BY: Vincent Lin | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1608.00 | 45.60 PK | 74.00 | -28.40 | 1.52 H | 60 | 18.34 | 27.26 |
| 2 | 3216.00 | 48.90 PK | 74.00 | -25.10 | 1.30 H | 72 | 17.36 | 31.54 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1608.00 | 44.60 PK | 74.00 | -29.40 | 1.22 V | 110 | 17.34 | 27.26 |
| 2 | 3216.00 | 48.60 PK | 74.00 | -25.40 | 1.36 V | 92 | 17.06 | 31.54 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| | | | |
|---------------------------------|--|-------------------------------|--------------------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25 GHz |
| MODE | CCK | | |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 60%RH, 991hPa | TESTED BY: Vincent Lin | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1624.60 | 45.30 PK | 74.00 | -28.70 | 1.28 H | 91 | 17.99 | 27.31 |
| 2 | 3248.90 | 48.60 PK | 74.00 | -25.40 | 1.05 H | 82 | 17.02 | 31.58 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1624.80 | 42.60 PK | 74.00 | -31.40 | 1.63 V | 222 | 15.29 | 27.31 |
| 2 | 3248.90 | 45.10 PK | 74.00 | -28.90 | 1.02 V | 11 | 13.52 | 31.58 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| | | | |
|---------------------------------|--|-------------------------------|--------------------------|
| EUT | 125/54Mbps Wireless Access Point with Bridge | MODEL | TEW-410APB+ |
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25 GHz |
| MODE | CCK | | |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 60%RH, 991hPa | TESTED BY: Vincent Lin | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1641.30 | 41.20 PK | 74.00 | -32.80 | 1.03 H | 201 | 13.85 | 27.35 |
| 2 | 3282.50 | 49.00 PK | 74.00 | -25.00 | 1.50 H | 112 | 17.39 | 31.61 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1641.30 | 44.90 PK | 74.00 | -29.10 | 1.30 V | 60 | 17.55 | 27.35 |
| 2 | 3282.40 | 45.20 PK | 74.00 | -28.80 | 1.39 V | 62 | 13.59 | 31.61 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

| | |
|--------------------|-----------------------|
| USA | FCC, NVLAP, UL |
| Germany | TUV Rheinland |
| Japan | VCCI |
| Norway | NEMKO |
| Canada | INDUSTRY CANADA , CSA |
| R.O.C. | CNLA, BSMI, DGT |
| Netherlands | Telefication |
| Singapore | PSB , GOST-ASIA(MOU) |
| Russia | CERTIS(MOU) |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF & Telecom Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.