



TEW-203PI **11Mbps Wireless PCI Network Adapter**

TRENDnet's TEW-203PI 11Mbps Wireless LAN PCI Card creates freedom for your desktop PC. This PCI Card plugs right into your PCI Bus Slot providing wire-free access to networked resources from your LAN and Internet or create a network without networking cables. It dynamically shifts between 11, 5.5, 2, and 1 Mbps for maximum availability and reliability. Complying with 2.4 GHz frequency band and IEEE 802.11b standard, TRENDnet's TEW-203PI ensures great security and performance for your wireless networking environment.



FEATURES

- ...→ Wire-Free access to networked resources for desktop PC
- ...→ Uses 2.4 GHz frequency band (DSSS), which complies with world wide requirements
- ...→ Delivers data rate up to 11 Mbps
- ...→ Dynamically shifts between 11, 5.5, 2, and 1 Mbps network speed, based on signal strength, for maximum availability and reliability of connection
- ...→ Reverse SMA connector with detachable external Antenna
- ...→ Supports Windows 98/2000/ME/NT4.0 (SP6)/XP and Linux
- ...→ Ensures great security by providing the 64-bit and 128-bit Wired Equivalent Privacy (WEP) defined in IEEE 802.11b standard
- ...→ 3-Year Warranty

BENEFITS

- ...→ **Integration Friendly:**
Drivers support most popular Network Operating Systems.
- ...→ **Economical:**
Save time, labor, and material for network cable installation.
- ...→ **Flexible:**
Creates wireless peer-to-peer network in Ad-Hoc mode or connects to Ethernet LAN in Infrastructure mode using wireless Access Point.
- ...→ **Cost Effective:**
Supports IEEE 802.11b wireless standard, user can connect to any IEEE 802.11b wireless network.
- ...→ **Performance:**
Connects at a speed up to 11Mbps, wirelessly!

TEW-203PI

11Mbps Wireless PCI Network Adapter

SPECIFICATIONS

Interface Type:

- PCI Bus Power Management Specification 1.0

Standards:

- IEEE 802.11b WLAN Standard, PCI Rev 2.2, ACPI 1.0

Antenna:

- External 2dbi Antenna (length = 103mm) with Reverse SMA connector

Data Rate:

- 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps

Media Access Protocol:

- CSMA/CA with ACT

Module Technique:

- Direct Sequence Spread Spectrum (DSSS), CCK, DQPSK, DBPSK

Frequency:

- 2.4 to 2.4835GHz (Industrial Scientific Medical Band)

LED Indicator:

- Power

Output Power:

- 15 dBm (typical)

Receiving Sensitivity:

- 10-5 BER @ -80 dbm (11Mbps) min.

Channels:

- 11 Channels (US & Canada)

Power Consumption:

- 3.3V, 350mA (Max.)

Dimensions:

- 134 x 120 x 23 mm without antenna (5.27 x 4.72 x 0.9 inches)

Weight:

- Appr. 85 grams (3.0 Oz.) with antenna

Temperature:

- Operating: 0° ~ 55°C (32° ~ 131°F)
- Storage: -20° ~ 65°C (-4° ~ 149°F)

Humidity:


- 95% max. (Non-condensing)

Certification:

- FCC, CE



NETWORKING SOLUTIONS

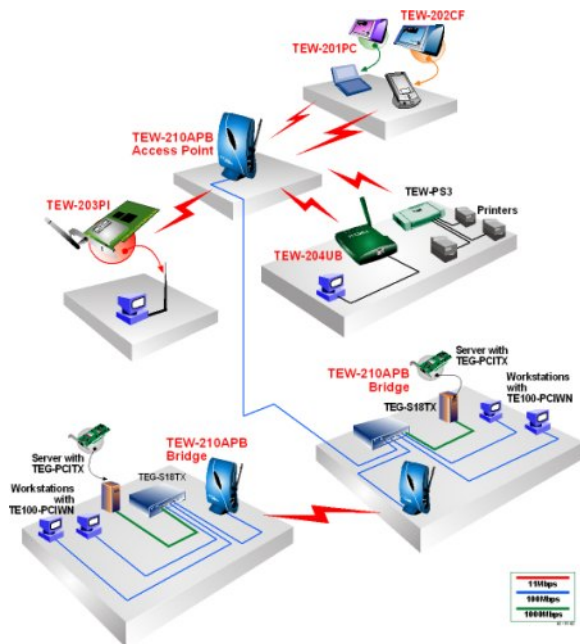

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- > **TEW-201PC** 11Mbps Wireless PCMCIA Network Adapter
- > **TEW-202CF**: 11Mbps Wireless CompactFlash Network Adapter
- > **TEW-203PI**: 11Mbps Wireless PCI Network Adapter
- > **TEW-204UB**: 11Mbps Wireless USB Network Adapter
- > **TEW-210APB**: 11Mbps Wireless Access Point + Bridge
- > **TEW-211BRP**: 11Mbps Wireless Broadband Router + Access Point
- > **TEW-PS3**: 3-port Wireless Ethernet Print Server
- > **TEW-IA040**: 4.0 dBi 2.4GHz ISM Band Omni Directional Antenna (with Reverse SMA Connector)
- > **TEW-IA06D**: 6.0 dBi 2.4GHz ISM Band Patch Antenna (with Reverse SMA Connector)
- > **TEW-OA14D**: 14dBi Directional Antenna (outdoor) for IEEE 802.11b 2.4 GHz ISM Band
- > **TEW-2000F**: N-Type Male to Reverse SMA Female Antenna Cable (2 meters) for Outdoor Antenna

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA

Tel: 310-891-1100

Fax: 310-891-1111

Web: www.TRENDNET.com

Email: sales@trendware.com

