



TEW-P1P *Wireless Print Server with 1 Parallel Port*

TRENDnet TEW-P1P is a direct attached wireless print server that transforms virtually all stand-alone Parallel printer into a shared network printer. The TEW-P1P provides IEEE 802.11b 11Mbps wireless interface for integrating into existing wireless network. The TEW-P1P has a standard 36-pin centronics connector for fast and easy connection to the printer without using printer cable. The TEW-P1P is an ideal network solution that transforms conventional parallel printer into a shared resource on the network. Network professionals can easily manage the print server using Web Browser or Windows based setup wizard and utilize the TEW-P1P to promote productivity in a workgroup environment with low equipment cost.



FEATURES

- ...→ Compliant with IEEE 802.11b 11Mbps Wireless LAN
- ...→ One DB-36 Male Centronics Parallel Printer Port provides direct connection to printer
- ...→ Supports Ad-Hoc or Infrastructure wireless mode
- ...→ 64/128-bit Wired Equivalent Privacy (WEP) in wireless mode
- ...→ Supports TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB and IPP network protocols
- ...→ DHCP client
- ...→ Works with Windows 95/98/Me/NT4.0/2000/XP, Mac OS 8.1 or higher, Unix/Linux, and NetWare (Bindery/NDS)
- ...→ Supports SNMP & HP Web JetAdmin
- ...→ Bi-directional Communication
- ...→ 2MB System Memory and 1 MB Flash Memory
- ...→ Easy configuration with Web Browser or Windows-Based administrative program
- ...→ Diagnostic DIP switch and Reset button
- ...→ Compact pocket size
- ...→ 3-year warranty

BENEFITS

- ...→ **Integration Friendly:**
Supports TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB (over IP) protocols and all popular operating systems.
- ...→ **Flexible:**
Works in Ad-Hoc Wireless LAN mode or in Infrastructure Wireless LAN Mode and you can install the Print Server anywhere in the network.
- ...→ **Cost Effective:**
Go wireless; save time, space and money for laying network cables.
- ...→ **Performance:**
Up to 11Mbps bandwidth for wireless network.



TEW-P1P

Wireless Print Server with 1 Parallel Port

SPECIFICATIONS

Wireless Standard:

- IEEE 802.11b 11Mbps 2.4GHz DSSS ISM band

Wireless Mode:

- Ad-hoc or Infrastructure

Wireless Encryption:

- 64/128-bit WEP

Wireless Data Rate:

- 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps (auto-fallback)

Wireless Channels:

- 11 Channels (US/Canada)

Radio Output Power:

- 13 ~ 17 dBm (typical 15dBm)

Antenna:

- 2 dBi Internal Antenna

Printer Interface:

- IEEE 1284 Bi-directional DB-36 parallel centronics connector

Supported Protocols:

- TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB (over IP) and IPP

LED Indicator:

- Status, WLAN

Power:

- 3.3V DC, 2A; External Power Adapter

Dimensions (LxWxH):

- 78 x 60 x 26 mm (3.07 x 2.36 x 1.02 inches)

Weight:

- 69 g. (2.4 Oz.)

Temperature:

- Operating: 0° ~ 50°C (32° ~ 122°F)
- Storage: -5° ~ 65°C (23° ~ 149°F)

Humidity:

- Operating: 0% ~ 70%

Storage:


- 0% ~ 80%

Emission:

- FCC class B, CE class B



NETWORKING SOLUTIONS

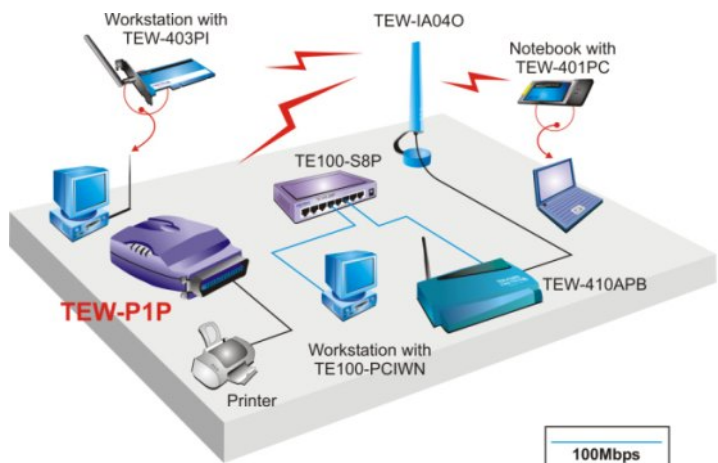

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- ➔ **TEW-P1P:** 11Mbps Wireless 1 Parallel Port Print Server
- ➔ **TEW-P1U:** 11Mbps Wireless 1 USB Port Print Server
- ➔ **TEW-P1U1P:** 11Mbps Wireless 1 USB + 1 Parallel Port Print Server
- ➔ **TE100-PS1U:** 10/100Mbps 1 USB Port Print Server
- ➔ **TE100-P2U1P:** 10/100Mbps 2 USB + 1 Parallel Port Print Server
- ➔ **TE100-PS1plus:** 10/100Mbps 1-Parallel Port Print Server
- ➔ **TE100-PS3plus:** 10/100Mbps 3-Parallel Port Print Server

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

