



TK-1601R 16-Port Rack Mount KVM Switch

TRENDnet TK-1601R 16-Port KVM Switch allows you to manage up to 16 PC's with just one keyboard, monitor, and mouse. Switches between multiple PCs with a simple press of a button! Eliminates the hassle of cable swapping, save money and space with the TK-1601R. This KVM Switch also comes with a rack-mount kit for mounting on standard EIA-19" equipment rack in the Server Room and Computer Lab. Rich in features such as Hot-Plug, Auto-Scan, and Hot-Key operations; TRENDnet TK-1601R is the perfect choice for managing multiple Pcs.



FEATURES

- Support Microsoft Intellimouse, Microsoft Intellimouse Explorer, Logitech NetMouse, Optical Mouse, Cordless Mouse and other Microsoft compatible mouse
- PS/2 Keyboard/Mouse emulation
- Supports DOS, Windows 3.x/95/98/ME/NT/2000/XP, Netware, Unix, Linux, and more
- Very high video quality – up to 1920 x 1440 resolution and 200Mhz bandwidth
- No software required – easy PC selection via Push Buttons and Hot-Key Operations
- Hot-Plug feature – add or remove PCs without powering off the KVM Switch or other Pcs
- Auto-Scan Mode for monitoring PCs; with configurable scan interval from 5 ~ 99 seconds
- Keyboard status restored when switching between Pc's
- LED Display for easy status monitoring
- Beeping sound for port switching confirmation (could be disabled in auto-scan mode)
- EIA-19" rack-mountable (hardware included)
- 1-Year Warranty

BENEFITS

- **Integration Friendly:**
Does not require driver/software for the installation and operation. Switching between PCs with the Push Buttons and Hot-Key operations.
- **Flexible:**
Hot-Plug feature – add PCs or remove connected PCs without powering off the KVM Switch or the other Pcs.
- **Cost Effective:**
Manage multiple PCs with single keyboard, monitor, and mouse. Save on equipment cost, utility, and space.
- **Performance:**
Support very High Video Quality up to 1920 x 1440 with 200Mhz bandwidth. Keyboard status is saved for each PC.



TK-1601R

16-Port Rack Mount KVM Switch

SPECIFICATIONS

Computer Port:

- 16 ports.
- Keyboard and Mouse:
- PS/2 type mini Din 6-pin (female), VGA: HDDB 15-pin (female)

Console Port:

- 1 port.
- Keyboard and Mouse: PS/2 type mini Din 6-pin (female), VGA HDDB 15-pin (female)

PC Selection:

- Hot-Keys and Push Buttons

LED Segment:

- Two LED indicators per port (PC Link (green) and PC Active (red))

Auto-Scan Interval:

- 5 ~ 99 seconds

Keyboard State:

- Saved and restored

Video Bandwidth:

- 200MHz

Power Adapter (Optional):

- External AC Power adapter, 12V DC, 1A (or 9V DC, 1A)

Dimensions:

- 406.0 x 163.5 x 85.0 mm (15.98 x 6.44 x 3.35 inches)

Weight:

- 2.65 Kg. (5.85 lbs)

Temperature:

- Operating: 0° ~ 40° C (32° ~ 104° F)
- Storage: -20° ~ 60° C (-4° ~ 140° F)

Operating Humidity:


- 0% ~ 80% (non-condensing)

Emissions:

- FCC, CE



NETWORKING SOLUTIONS

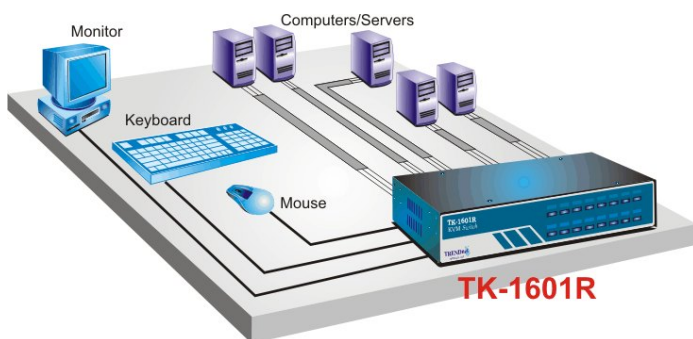

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- **TK-1601R:** 16-Port Rack Mount KVM Switch
- **TK-200K:** 2-Port KVM Switch Kit TK-205i 2-Port KVM Switch with Integrated Cables
- **TK-400K:** 4-Port KVM Switch Kit TK-401R 4-Port Rack Mount KVM Switch
- **TK-801R:** 8-Port Rack Mount KVM Switch
- **TK-802R:** 8-Port Stackable Rack Mount KVM Switch (with OSD)
- **TK-C06:** 6-Feet KVM Cable (male-to-male)
- **TK-C10:** 10-Feet KVM Cable (male-to-male)
- **TK-C15:** 15-Feet KVM Cable (male-to-male)

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

