



TU-400E **4-Port Bus-Powered USB Hub**

TRENDnet's TU-400E is a highly integrated 4-port USB hub. It consists of one upstream and four downstream ports and was designed to bridge USB interfaced peripherals to your desktop or notebook computer. The TU-400E complies with USB 1.0/1.1 specifications and supports both full (12Mbps) and low (1.5Mbps) data rate speeds. With Plug-and-Play and Hot-Swap, you can easily connect/disconnect USB equipped camera, network adapter, modem, and joystick to your computer. Connect each port to another USB hub for limited expansion. Compact, light-weighted, and requiring no external power, the TU-400E is ideal for SOHO and mobile computing.



FEATURES

- Compatible with Universal Serial Bus Rev. 1.0 and 1.1 Specification
- Plug-and-Play (PnP) and Hot-Swappable
- Supports Windows 98/ME/2000/XP and iMAC / Macintosh
- Easy expansion with other USB Hubs, allows the use of up to 127 devices
- Supports 1 upstream and 4 downstream USB ports
- All downstream ports support high-speed (12Mbps) and low-speed (1.5Mbps) operations mode
- Power control/overload detection on each individual USB port
- Single status LED
- Bus-Powered; does not require AC Power Adapter
- 5 Year Warranty

BENEFITS

- **Compatibility:**
4-port USB Hub is compatible with Windows 98/ME/2000 and iMac/Macintosh, so it is ready to work as soon as the user plugs it into PC.
- **Flexibility:**
TU-400E provides convenient ways to connect USB devices to Desktop or Laptop.
- **Expandability:**
Daisy-chain to additional USB Hubs to allow the use of up to 127 USB devices at the same time.
- **Speed: Supports**
12Mbps high-speed and 1.5Mbps low-speed operations mode.



TU-400E

4-Port Bus-Powered USB Hub

SPECIFICATIONS

Standard:

- Universal Serial Bus Standard v1.1

USB Ports:

- 1 x Type-A upstream port
- 4 x Type-A downstream ports

Access Speed:

- 12Mbps for high-speed
- 1.5Mbps for low-speed

Output Power/Current:

- DC +5V per port / 4 ports total 500mA

Max Devices Supported:

- 127 (daisy-chaining hubs)

Power Consumption:

- 2.5 Watts (max.)

LED Indicator:

- 1 x Hub Status (Green)

Dimensions:

- 65 x 48 x 28 mm
(2.56 x 1.89 x 1.10 inches)

Weight:

- 85 g. (3 Oz.)

Temperature:

- Operating: 0° to 50° C (32° to 122° F)
- Storage: -25° to 70° C (-13° to 158° F)

Humidity:


- Storage: 10% to 90%
- Operation: 10% to 70% (non-condensing)

Certifications:

- FCC, CE, VCCI



NETWORKING SOLUTIONS

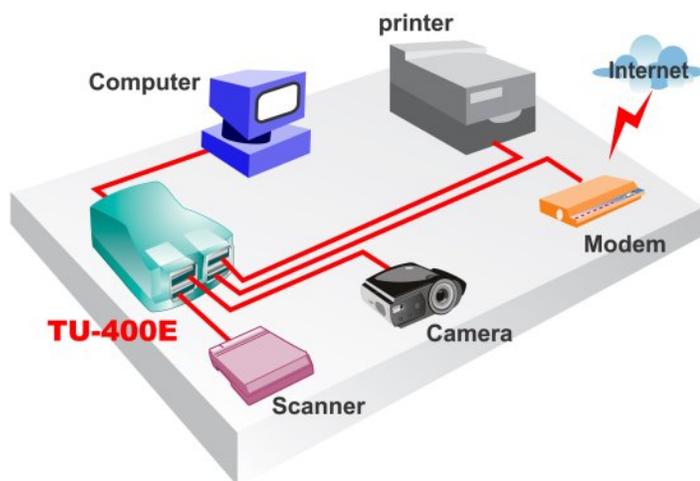

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- TU-400E: 4-port Bus-Powered USB Hub
- TU-400: 4-port Bus-/Self-Powered USB Hub
- TU-700: 7-port Self-Powered USB Hub

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA