


TU2-ET100 *Hi-Speed USB to Fast Ethernet Adapter*

The TU2-ET100 is a high speed USB network adapter. It allows you to instantly connect to a 10/100Mbps network from a USB enabled desktop or Notebook PC. Compliant with the USB 2.0 standard and backwards compatible with the USB 1.0 and 1.1, the TU2-ET100 features 480Mbps throughput that fully supports 100Mbps connection. You can instantly add network capability for sharing files and printers between PCs for your home or office. Use the TU2-ET100 to gain access to broadband Internet and explore valuable resources on the web.

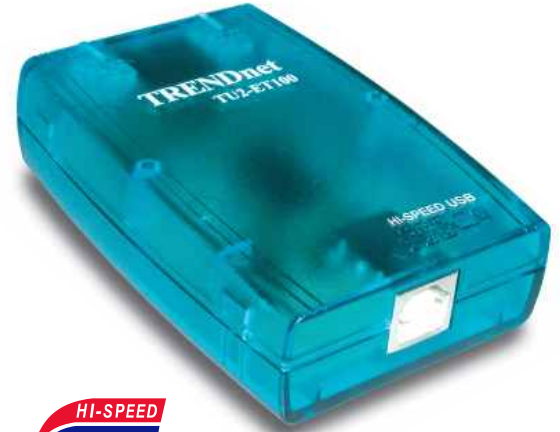

Caractéristiques

- Compliant with USB specification 1.0, 1.1, and 2.0
- Auto-sense 10/100Mbps connection speed
- Features full-duplex mode that doubles the network connection speed
- Bus Powered – no external power is required
- Easy to read LED indicators
- Compact and robust design – perfect solution for all network users both desktop and mobile
- Compatible with Windows 98/ME/2000/XP
- Supports Plug and Play
- Easy installation
- USB 2.0 A-B Cable included
- 5-years warranty

Avantages

- **Compatibility:**
TU2-ET100 is compatible with Windows 98/ME/2000/XP.
- **Flexibility:**
The “Hot Swap” feature creates flexible connection and disconnection at any time.
- **Installation:**
Provides easy installation with Plug and Play feature.
- **Speed:**
Provides 480Mbps high-speed, 12Mbps full-speed, or 1.5Mbps low-speed operation mode.



TU2-ET100

Hi-Speed USB to Fast Ethernet Adapter

Spécifications

Standard:

- IEEE 802.3 10Base-T
- 802.3u 100Base-TX,
- USB Specification 1.0, 1.1, and 2.0

Cabling:

- Cat. 5 UTP/STP cable up to 100 meters (328 feet)

Data Speed:

- 10/100Mbps for Ethernet/Fast Ethernet data transfer

Power Consumption:

- Operating Mode: +5V DC, 330mA Max.
- Suspend Mode: +5V DC, 25mA

LEDs:

- Link (10/100Mbps), TX/RX (Activity)

Driver Support:

- Windows 98/ME/2000/XP

Host Interface:

- High-Power Bus-Powered from USB Host or USB Hub (does not require power supply)
- High-Speed USB, upstream USB Type B Connector
- Supports Suspend Power Saving mode

Dimensions:

- 80 x 53 x 22 mm (3.2 x 2.1 x 0.9 inches)

Weight:

- 68 g (2.4 oz.)

Operating Temperature:

- 0° ~ 65° C (32° ~ 149° F)

Operating Humidity:


- 10 % ~ 90 % non-condensing

Certifications:

- FCC, CE, VCCI



Solution de Réseaux

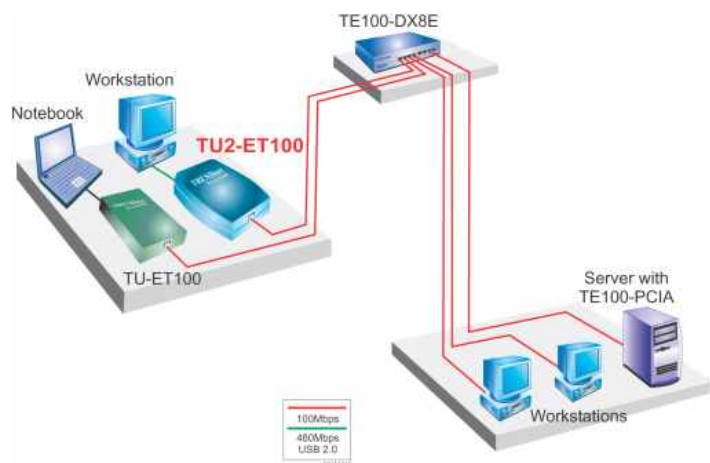

Information du Produit

- TU2-ET100
Hi-Speed USB to Fast Ethernet Adapter
- TU2-400
4-port Hi-Speed USB Hub

Nous Contacter



TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.trendware.com
Email: sales@trendware.com

Pour commander, contactez nous au:
1-310-891-1100