

TU-400 **4-Port USB Hub**

TRENDnet introduces TU-400 4-port USB Hub that includes highly integrated four USB ports. The TU-400 is convenient for a wide variety of legacies and other peripherals, such as speakers, cameras, and joysticks, to be connected that are controlled by USB enabled systems. Our TU-400 USB Hub equips with power control and over-current detection on each of four downstream ports. This feature allows to detect both modes automatically. With TRENDnet TU-400's data access rate up to 12Mbps, it provides for devices requiring more bandwidth. Compact, efficient, and easy-to-install TRENDnet's TU-400 is the choice for USB solution.



Características

- > Compatible with Universal Serial Bus Rev. 1.0 Specification
- > Plug and Play (PnP) with USB devices
- > Easy to expand USB Hub allows the use up to 127 devices
- > 6 status LEDs per USB port indication
- > Supports 1 upstream and 4 downstream USB ports
- > Supports Self-Powered mode and Bus-Powered mode indicated by power LED
- > All downstream ports support high-speed (12Mbps) and low-speed (1.5Mbps) operations mode
- > Power control/overload detection on each individual USB port
- > 2.1 Amp switching power supply - Ensures each port has 500mA current output
- > 5 Year Warranty

Beneficios

- > **Compatibilidad:**
4-port USB Hub is compatible with Windows 95/98/NT 5.0, Windows 2000, iMac, Mac G3, so it is ready to work as soon as the users plug it into PC.
- > **Flexibilidad:**
TU-400 provides the most convenient way to connect USB to any Desktop or Laptop.
- > **Expansion:**
Able to daisy-chain to additional USB Hub that allows the use up to 127 USB devices at the same time.
- > **Velocidad:**
Provides 12Mbps high-speed and 1.5Mbps low-speed operations



TU-400

4-Port USB Hub

Especificaciones

Normas:

- Universal Serial Bus Standard v1.0
- Puertos USB: 1 x upstream port, 4 x downstream ports

Velocidad de Acceso:

- 12Mbps for high-speed, 1.5Mbps for low-speed

Fuente Alimentacion:

- External power supply DC6V, 2.1A

Dispositivos Maximos:

- 127 (daisy-chaining hubs)

Bajo consumo de energía:

- DC 5V/500mA per each USB downstream ports

Indicadores LED:

- 1 Bus-Power LED (green), 1 Self-Power LED (orange), 4 Port-Status LEDs (green)

Dimensiones:

- 102 x 85 x 30 mm
(4.01 x 3.35 x 1.18 inches)

Peso:

- 113 g (0.25 lbs.)

Temperatura:

- Operating: 0° to 70° C
- Storage: -20° to 80° C

Humedad:


- 10% to 95% (non-condensing)

Certificaciones:

- FCC, CE, VCCI-II



Soluciones de Redes

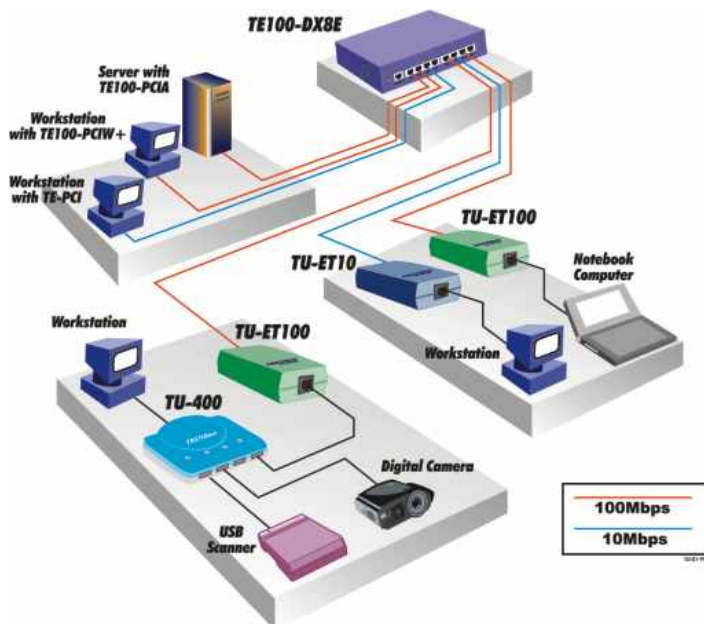

Información del Producto

- TU-ET10: USB to Ethernet Adapter
- TU-ET100: USB to 10/100Mbps Fast Ethernet Adapter
- TU-400: 4-port USB Hub
- TU-700: 7-port USB Hub

Información de cómo Ordenar



TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.trendware.com
Email: sales@trendware.com

Para ordenar por favor llamar al:
+1-888-326-6061 USA