





## 10/100Mbps Parallel Print Server TE100-P1P (v2)

The 10/100Mbps Parallel Print Server is designed to transform any conventional stand-alone parallel port printer into a shared resource on your network. Compact in design, but packed with features the TE100-P1P is the most cost effective way to add a parallel printer anywhere on your network!

- FEATURES Compliant with Bi-directional 36-pin parallel port
  - One RJ-45 10/100Mbps Auto-MDIX Fast Ethernet Port
  - Includes LPR Program for Windows 95/98/ME TCP/IP Printing Supports IPP Printing for Windows 2000/XP
  - Supports second HTTP port for Remote Web Configuration and IPP Printing
  - Supports Mac 10.2 "Rendezvous" Zero-Configuration Function
  - TCP/IP protocol supports DHCP, IPP, LPR, HTTP
  - IP Assignment Support for DHCP
  - Includes Windows-Based Administrative Program and Web-Based Configuration
  - Built-in Flash Memory for Easy Firmware Upgrade
  - 5-Years Warranty
  - \*Mac Systems are only compatible with Post-Script printers

## **BENEFITS** Integration Friendly:

Supports multiple protocols and all popular Operating Systems.

Integrates with 10Base-T, 100Base-TX

### **Cost Effective:**

Turns the stand-alone printer into a network printer.

### Performance:


100Mbps bandwidth for wired network.

# **10/100Mbps Parallel Print Server** TE100-P1P (v2)

### **SPECIFICATIONS**

Hardware	
Standards	• IEEE 802.3 10Base-T
	• IEEE 802.3u 100Base-TX
Printer Interface	IEEE 1284 Male Centronics (DB-36)
LAN Port	10/100Mbps MDIX Ethernet Port
CPU/ SDRAM / Flash ROM	RDC R2021 100MHz / 2MByte / 512KByte
LED	Power, LPT, Link/Act
Transport Protocol	• TCP/IP, SMB
TCP/IP Protocol Supported	DHCP, IPP, LPR, HTTP
OS Support	Windows 95/98(SE)/NT/ME/2000/XP/2003
	Netware 5.x NDPS LPR Remote Printing (TCP/IP)
	Unixware, Linux
	Mac OS X (IP Printing)
Management	PS Utility or Web-Browser Configuration
Power	5V DC 2.5A External Power Adapter
Dimensions	• 57 x 90 x 32mm (2.2 x 3.5 x 1.3 inches)
Weight	• 74 g (2.6 oz.)
Temperature	• Operating: 5°~40°C (41°~104°F)
	• Storage: -25°~50°C (-13°~122°F)
Humidity	• 5%~95% (non-condensing)
Certification	• CE, FCC

### **NETWORKING SOLUTIONS**

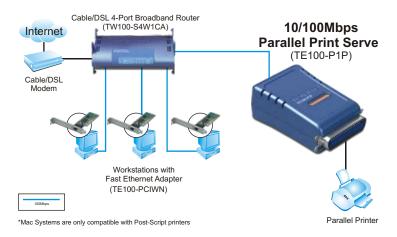

### PACKAGE CONTENTS

- TE100-P1P
- Multi-Language Quick Installation Guide
- Utility & User's Guide CD-ROM
- Power Adapter (5V DC, 2.5A)

## RELATED PRODUCTS

TEW-P1PG	54Mbps 802.11g Wireless Parallel Print Server
TEW-P21G	54Mbps 802.11g Multi-Port Print Server 2 USB 2.0 & 1 Parallel Printer Port
TE100-P21	10/100Mbps Multi-Port Print Server 2 USB 2.0 & 1 Parallel Printer Port

### ORDERING INFORMATION

### TRENDIET

3135 Kashiwa Street, Torrance, CA 90505 USA

Tel: 1-888-777-1550 Fax: 310-891-1111 Web: <u>www.trendnet</u>

Web: www.trendnet.com
Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

