



5-Port 10/100Mbps Fast Ethernet Switch TE100-S5Pplus (V. F1.0R)

TE100-S5Pplus, 5-port 10/100Mbps Fast Ethernet Switch, presents the perfect choice for small workgroups for any desktop space. It allows users to simply plug any port to either a 10Mbps or 100Mbps network to multiply bandwidth, boost response time and satisfy heavy load demands. The ports automatically negotiate between half- and full-duplex modes, and Auto-MDIX media types.

FEATURES

- 5 10/100Mbps Auto-Negotiation, Auto-MDIX Fast Ethernet RJ-45 ports
- Compliant with IEEE 802.3 / IEEE 802.3u standards
- IEEE 802.3x Flow Control support
- Provide 1K MAC address entries
- Compliant with Windows, Linux, and Mac Operating Systems
- Store-and-Forward Switching method
- Non-blocking architecture
- Diagnostic LEDs
- Plug & Play
- 5-Year Warranty


5-Port 10/100Mbps Fast Ethernet Switch

TE100-S5Pplus (V. F1.0R)

SPECIFICATIONS

| Hardware | |
|-------------------|---|
| Standards | <ul style="list-style-type: none"> • IEEE 802.3 10Base-T • IEEE 802.3u 100Base-TX |
| Network Media | <ul style="list-style-type: none"> • Ethernet: UTP/STP Cat. 3,4,5, EIA/TIA-568 100-ohm • Fast Ethernet: UTP/STP Cat. 5, EIA/TIA-568 100-ohm |
| Data Rate | <ul style="list-style-type: none"> • Ethernet: 10Mbps/20Mbps (Half/Full-Duplex)Fast • Ethernet: 100Mbps/200Mbps (Half/Full-Duplex) |
| Switch Fabric | <ul style="list-style-type: none"> • 1Gbps Forwarding Capacity |
| Topology | <ul style="list-style-type: none"> • Star |
| Interface | <ul style="list-style-type: none"> • 5 10/100Mbps Auto-MDIX RJ-45 Ports |
| Filtering Table | <ul style="list-style-type: none"> • 1K Entries Per Device |
| Power Consumption | <ul style="list-style-type: none"> • 2.5 watts (max) |
| Diagnostic LED | <ul style="list-style-type: none"> • Power, Link/ACT,100Mbps |
| Power Adapter | <ul style="list-style-type: none"> • 7.5V DC, 1A External Power Adapter |
| Dimension | <ul style="list-style-type: none"> • 165 x 73 X 33mm (6.5 x 2.87 x 0.87in.) |
| Weight | <ul style="list-style-type: none"> • 145g (5.11oz.) |
| Temperature | <ul style="list-style-type: none"> • Operating: 0°~ 40°C (32°~ 104°F) • Storage: -10°~ 70°C (14°~ 158°F) |
| Humidity | <ul style="list-style-type: none"> • Operating: 10%~90% (Non-Condensing) • Storage: 5%~90% (Non-Condensing) |
| Certification | <ul style="list-style-type: none"> • CE, FCC |

NETWORKING SOLUTIONS

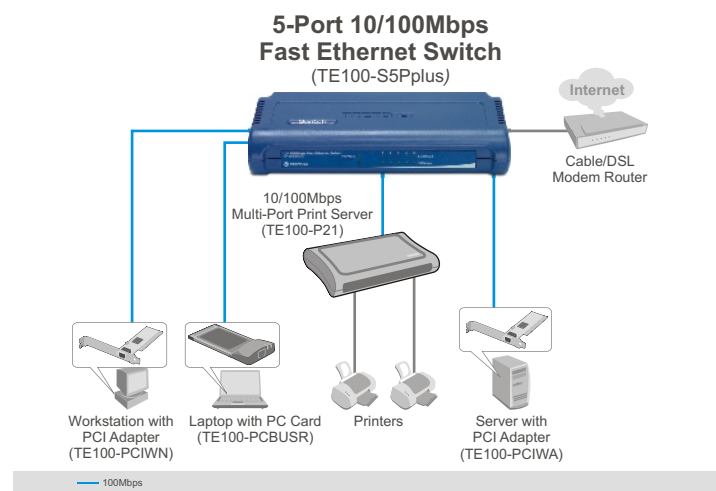

PACKAGE CONTENTS

- TE100-S5Pplus
- Multi-Language Quick Installation Guide
- Power Adapter (7V DC, 1A)

RELATED PRODUCTS

| | |
|--------------|--|
| TE100-PCIWN | 32-bit PCI 10/100Mbps N-way Fast Ethernet Card |
| TE100-PCBUSR | 10/100Mbps PCMCIA 32-bit CardBus Ethernet Card with XpressPort |

ORDERING INFORMATION

TRENDnet

3135 Kashiwa Street, Torrance, CA 90505 USA
 Tel: 1-310-891-1100
 Fax: 1-310-891-1111
 Web: www.trendnet.com
 Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

