



48-Port 10/100 Mbps Web Smart Switch w/4 Gigabit Ports and 2 Mini-GBIC Slots TEG-2248WS (B1.0R)

The 48-Port 10/100 Mbps Web Smart Switch with 4 Gigabit Ports and 2 Mini-GBIC Slots (model TEG-2248WS) delivers a 17.6 Gbps switching capacity with managed layer 2 features at a reduced cost. Support for SNMP v1, 802.1X, STP, 802.1Q VLAN, QoS, IGMP snooping, Broadcast Storm Control and port Trunking provides a cost effective, scalable and secure backbone switch solution for SMB networks.

SNMP support enables the switch to provide valuable status and event information, saving system administrators time and resources. Connect a fiber network to the shared Mini-GBIC slots and network servers and switches using the Gigabit RJ-45 ports. Access the Web-browser management interface and segment up to 256 Virtual Local Area Networks, manage network priority with 802.1p support and dedicate bandwidth with port-based Trunking.

FEATURES

- 48 x 10/100 Mbps Auto-MDIX Fast Ethernet ports
- 4 x 10/100/1000 Mbps Auto-MDIX Gigabit ports
- 2 x 1000Base-SX/LX Mini-GBIC slots (shared with 2 Gigabit ports)
- 17.6 Gbps switching capacity
- IEEE 802.3x Full Duplex Flow Control and Back Pressure
- Static Port Trunk
- IEEE 802.1D Spanning Tree Protocol
- IEEE 802.1p QoS
- IEEE 802.1X Authentication and SNMP v1 support
- Supports port based IEEE 802.1Q VLAN Tag and Asymmetric VLAN
- Store and Forward switching method
- Integrated address look-up engine with an 8K absolute MAC address table
- Supports 128 Kbytes RAM for data buffering
- Easy configuration via Web browser
- Front panel diagnostic LEDs
- Standard 1U (19") rackmount size (rackmount kit included)
- 3-year limited warranty

48-Port 10/100 Mbps Web Smart Switch w/4 Gigabit Ports and 2 Mini-GBIC Slots

TEG-2248WS (B1.0R)



SPECIFICATIONS

HARDWARE

Standards	<ul style="list-style-type: none">• IEEE 802.3 10Base-T• IEEE 802.3u 100Base-TX• IEEE 802.3ab 1000Base-T• IEEE 802.3z 1000Base-SX/LX (Mini-GBIC)• IEEE 802.3x Flow Control and Back Pressure• IEEE 802.1D Spanning Tree Protocol• IEEE 802.1p QoS• IEEE 802.1Q VLAN Tag• IEEE 802.1X Authentication• SNMP v1
Network Media	<ul style="list-style-type: none">• Ethernet: UTP/STP Cat. 3, 4, 5 up to 100m• Fast Ethernet: UTP/STP Cat. 5, 5e up to 100m• Gigabit: UTP/STP Cat. 5, 5e, 6 up to 100m
Protocol/Topology	<ul style="list-style-type: none">• CSMA/CD, Star
LAN Ports	<ul style="list-style-type: none">• 48 x 10/100 Mbps Auto-MDIX Fast Ethernet ports• 4 x 10/100/1000 Mbps Auto-MDIX Gigabit ports• 2 x 1000Base-SX/LX Mini-GBIC slots (shared with 2 Gigabit ports)
Data Transfer Rate	<ul style="list-style-type: none">• Ethernet: 10 Mbps/20 Mbps (Half/Full-Duplex)• Fast Ethernet: 100 Mbps/200 Mbps (Half/Full-Duplex)• Gigabit Ethernet: 2000 Mbps (Full-Duplex)
Address Table	<ul style="list-style-type: none">• 8K Entries
Switch Fabric	<ul style="list-style-type: none">• 17.6 Gbps forwarding capacity
Forwarding rate	<ul style="list-style-type: none">• 13 Mpps
Data RAM Buffer	<ul style="list-style-type: none">• 128 KBytes
Diagnostic LEDs	<ul style="list-style-type: none">• Per unit: Power, System• Per Fast Ethernet: Link/ACT, 100 Mbps• Per Copper Gigabit port: Link/ACT, Speed (1000 Mbps-green, 100 Mbps-amber)• Per Mini-GBIC port: Link/ACT, 1000 Mbps
Power Supply	<ul style="list-style-type: none">• 100-240V AC, 50/60 Hz internal universal power supply
Power Consumption	<ul style="list-style-type: none">• 24 watts (max)
Dimensions (W x D x H)	<ul style="list-style-type: none">• 440 x 310 x 44 mm (17.32 x 12.25 x 1.73 in.)
Weight	<ul style="list-style-type: none">• 2.6 kg (5.78 lbs)
Temperature	<ul style="list-style-type: none">• Operating: 0° ~ 40° C (32° ~ 104° F)• Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	<ul style="list-style-type: none">• Operating: 10% ~ 90% (non-condensing)• Storage: 5% ~ 90% RH (non-condensing)
Certifications	<ul style="list-style-type: none">• CE, FCC


48-Port 10/100 Mbps Web Smart Switch w/4 Gigabit Ports and 2 Mini-GBIC Slots

TEG-2248WS (B1.0R)



NETWORKING SOLUTIONS

48-Port 10/100Mbps Web Smart Switch
with 4 Gigabit Ports and 2 Mini-GBIC Slots
(TEG-2248WS)

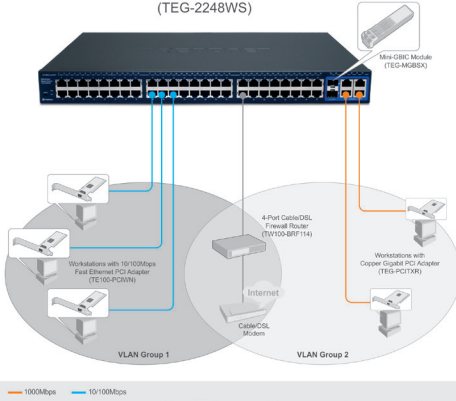

PACKAGE CONTENTS

TEG-2248WS

Multi-Language Quick Installation Guide

CD-ROM (Utility & User's Guide)

Power Supply

Rack Mount Kit

RELATED PRODUCTS

TEG-448WS	48-Port Gigabit Web Smart Switch w/ 4 Shared Mini-GBIC Slots
TEG-160WS	16-port Gigabit Web Smart Switch w/ 2 Shared Mini-GBIC Slots
TEG-240WS	24-port Gigabit Web Smart Switch w/ 2 Shared Mini-GBIC slots

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

