


Firmware Upgrade Procedure

1. Save the downloaded firmware file (.zip) to your PC
2. Right click on the downloaded file and select **Extract All** or **Extract Here** option
 - a. Make sure to remember the location where the extracted file will be saved.
3. Log into to the switch configuration page
Default URL/IP address <http://192.168.10.200>
Default User Name: admin Default Password: admin
4. Navigate to the **Tools** section, click on **Firmware** and select the Upgrade Method **HTTP** option.
For the Partition, select **Partition 1 (Active)**. Note: Make sure to select the partition marked active.
5. Click **Select File** and navigate to the location of the firmware file (.imag) extension.
6. After selecting the file, click **Apply** at the top right to start the upgrade process and wait for the timer to complete.

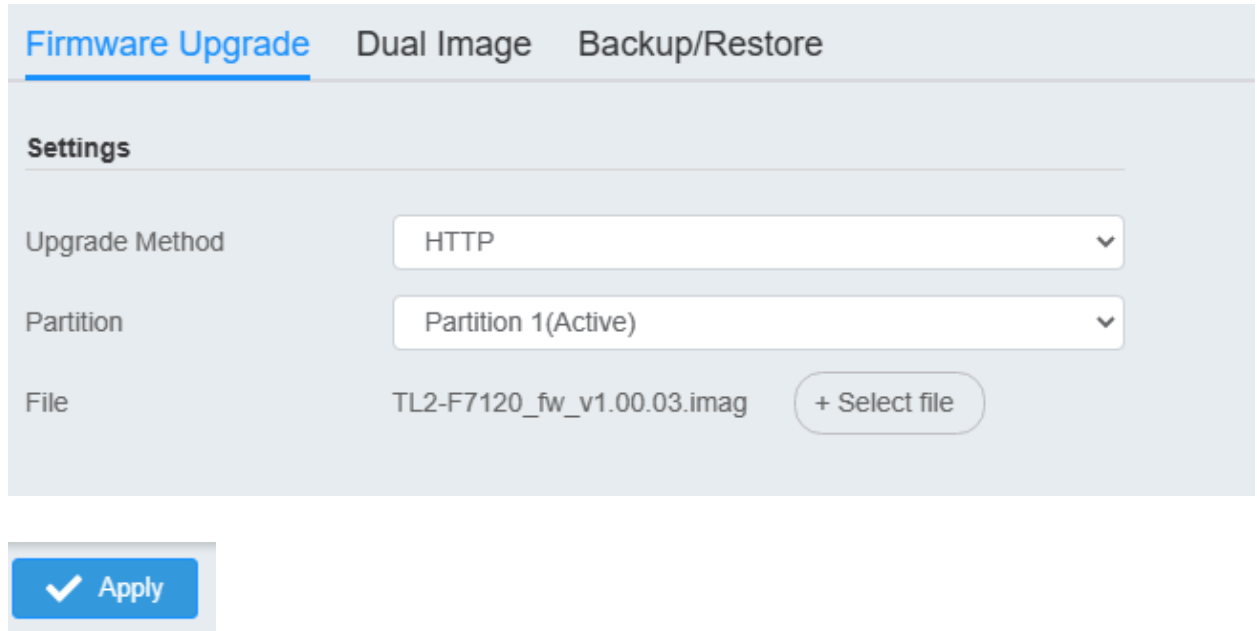

The screenshot shows a web interface for firmware upgrade. At the top, there are three tabs: 'Firmware Upgrade' (which is selected and underlined in blue), 'Dual Image', and 'Backup/Restore'. Below the tabs is a 'Settings' section. It contains three rows of configuration options: 'Upgrade Method' with a dropdown menu set to 'HTTP', 'Partition' with a dropdown menu set to 'Partition 1(Active)', and 'File' with the text 'TL2-F7120_fw_v1.00.03.imag' and a '+ Select file' button. Below the settings section is a large blue button with a white checkmark and the word 'Apply'.

7. Wait until the firmware upload has completed and the device reboots.
8. The firmware upgrade is complete.