



## 24-Port 10/100/1000Mbps Copper Gigabit Switch

### TEG-S240TX(E1.0R)

TEG-S240TX is a high performance 24-port rack mountable Copper Gigabit Switch. With auto-negotiation technology, the TEG-S240TX automatically negotiates between 10Base-T, 100Base-TX and 1000Base-T network speeds, as well as half and full duplex modes. The Auto-MDIX feature on each port automatically detects and adjusts connection type with either straight-through or crossover cable. Providing simple migration, scalability, and flexibility to handle new applications and data types, TEG-S240TX is a highly reliable and cost effective solution for high-speed network applications.

## FEATURES

- 24 10/100/1000Mbps Auto-Negotiation and Auto-MDIX ports
- Full/Half Duplex Transfer Mode for Each Port (1000Base-T connections support full-duplex mode only)
- Store and Forward Switching Method
- High Performance Single-Chip Design
- Non-Blocking Wire Speed Reception and Transmission
- IEEE 802.3x Full-Duplex Flow Control
- Integrated Address Look-Up Engine, Supports 8k Absolute MAC Address
- 500KBytes RAM Data Buffering
- Extensive Front Panel Diagnostic LEDs
- Standard 19" Rack-Mount Size
- 5-year Warranty


# 24-Port 10/100/1000Mbps Copper Gigabit Switch

## TEG-S240TX(E1.0R)

### SPECIFICATIONS

Hardware	
LAN Standards	• IEEE 802.3 10Base-T, 802.3u 100Base-TX and 802.3ab 1000Base-T, IEEE 802.3x Full Duplex Flow Control
Network Media	• Ethernet: 2-pair UTP Cat. 3, 4, 5, up to 10Mbps • Fast Ethernet: 2-pair UTP Cat. 5, up to 100Mbps • Gigabit: 4-pair UTP Cat. 5, 5E, 6, up to 1000Mbps
Transmission Method	• Store-and-Forward
Transfer Rates	• Ethernet: 10Mbps (Half-Duplex), 20Mbps (Full-Duplex) • Fast Ethernet: 100Mbps (Half-Duplex), 200Mbps (Full-Duplex) • Gigabit Ethernet: 2000Mbps (Full-Duplex)
Switch Fabric	• 46Gbps Forwarding Capacity
Data RAM Buffers	• 500Kbytes
MAC Table	• 8K entries per device
LED	• Per Unit: Power • Per Port: Link/ACT, 1000M, 100M
Power	• 100~240V AC, 50/60Hz, Internal Power Supply
Power Consumption	• 19 watts. (max)
Dimensions	• 440 x 210 x 44 mm (17.3 x 8.27x 1.73 inch) (W x H x D)
Weight	• 3Kg (6.6 lb)
Temperature	• Operating: 0° ~ 40° C (32° ~ 104°F) • Storage: -10° ~ 70° C (14° ~ 158°F)
Humidity	• 10% ~ 90% (non-condensing)
Emissions	• FCC, CE

### NETWORKING SOLUTIONS

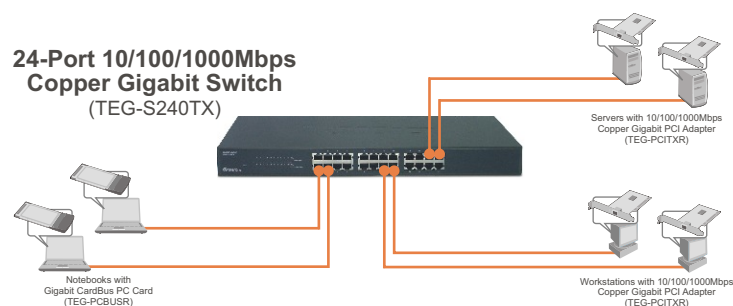

### PACKAGE CONTENTS

- TEG-S240TX
- Multi-Language Quick Installation Guide
- Rack Mount Kit
- Power Cord

### RELATED PRODUCTS

TEG-S160TX	16-Port 10/100/1000Mbps Copper Gigabit Switch
TEG-PCBUSR	32-bit Gigabit CardBus PC Card
TEG-PCITXR	32-bit 10/100/1000Mbps Copper Gigabit PCI Adapter

### ORDERING INFORMATION

#### TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA  
 Tel: 1-310-961-5500  
 Fax: 1-310-961-5511  
 Web: [www.trendnet.com](http://www.trendnet.com)  
 Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

