TRENDNET®



8-Port Gigabit GREENnet Switch

TEG-S80g (v4.0R)

- · Plug and play installation
- 8 x Gigabit ports
- 16Gbps switching capacity
- Up to 70% energy savings with GREENnet technology*
- Wall mountable metal housing
- Limited Lifetime Warranty

The 8-Port Gigabit GREENnet Switch, model TEG-S80g, provides high bandwidth performance, ease of use, and reliability, all while reducing power consumption by up to 70%*. GREENnet technology automatically adjusts power consumption as needed, resulting in substantial energy savings. Embedded GREENnet technology works right out of the box with no management requirement.

Boost office network efficiency and eliminate network congestion with gigabit speeds and a total switching capacity of 16Gbps with full-duplex mode. Integrate this sturdy metal switch for reliable high speed network connectivity.








8 gigabit ports provide high-speed network

connections to devices and a 16Gbps

switching capacity allows data traffic to

flow smoothly, reducing traffic bottlenecks.




Energy Savings

Embedded GREENnet technology provides cost savings and reduces power consumption by up to 70%, by limiting port power consumption during periods of low link utilization.

Gigabit Speeds

Compact Design

With a compact and lightweight metal housing design, this switch is well-suited for desktop installations. Its fanless design is perfect for quiet environments that require silent operation.

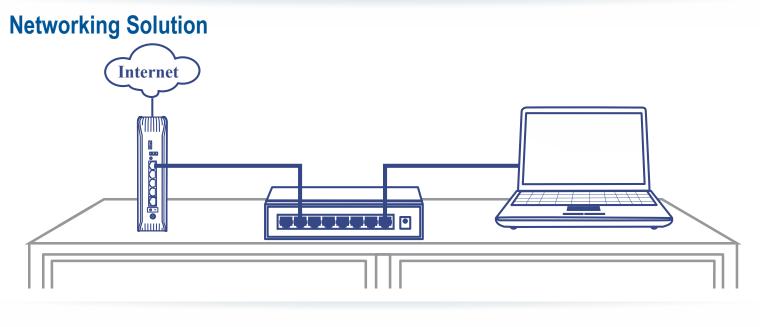



Easy Setup

Ports

Simply power up the switch and plug in connected devices



8 x Gigabit Ethernet ports



Switching Capacity 16Gbps switching capacity



Sends larger packets, or Jumbo Frames (up to 9KB), for increased performance



Fanless

Fanless design lowers energy consumption and eliminates operating noise



Housing Design

Compact and lightweight metal housing



LED Indicators LEDs convey power, link, and activity

TRENDNET®

Specifications

Standards	 IEEE 802.3 IEEE 802.3u IEEE 802.3x IEEE 802.3ab IEEE 802.3az
Device Interface	• 8 x Gigabit ports • LED indicators
Data Transfer Rate	 Ethernet: 10Mbps (half duplex), 20Mbps (full duplex) Fast Ethernet: 100Mbps (half duplex), 200Mbps (full duplex) Gigabit: 2000Mbps (full duplex)
Performance	 Data RAM buffer: 192KB Switch fabric: 16Gbps MAC address table: 4K Forwarding rate: 11.9Mpps (64-byte packet size) Jumbo frame: 9KB
Special Features	 GREENnet energy saving technology Metal enclosure Wall Mountable
Power	 Input: 100 – 240V AC, 50/60Hz, 0.15A Output: 5V DC, 1A external power adapter Max. consumption: 4W

Fan/Acoustics	• Fanless design
MTBF	• 2,082,116 Hours
Operating Temperature	• 0° – 40° C (32° – 104° F)
Operating Humidity	Max. 90% non-condensing
Dimensions	• 150 x 97 x 28mm (5.9 x 3.8 x 1.1 in.)
Weight	• 365g (12.9 oz.)
Certifications	• CE • FCC
Warranty	Lifetime

PACKAGE CONTENTS

• TEG-S80g

Quick Installation Guide

• Power adapter (5V DC, 1A)

TRENDnet offers a limited lifetime warranty for all of its metal-enclosed network switches that have been purchased in the United States/Canada on or after 1/1/2015. Cooling fan and internal power supply carry a one-year warranty.

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit http://www.trendnet.com. Copyright © TRENDnet. All Rights Reserved.