

TEW-229UB11Mbps Wireless USB Adapter

TRENDnet's TEW-229UB 11Mbps Wireless USB Network Adapter is the latest USB device for wireless network applications. Compatible with IEEE 802.11b standard, this USB Wireless Adapter implements four high-extensive data rates of 1, 2, 5.5 and 11Mbps with automatic rate selection for fast and reliable wireless data communication. Designed for desktop PCs and Laptops with USB support, TRENDnet's TEW-229UB is fully mobile and roams seamlessly from Access Point to Access Point. This adapter allows users to create a wireless Local Area Network or connect to the wired Ethernet network at home or at the office with coverage up to 300 meters!





FEATURES

- --- Portable Pen-Size design
- *** IEEE 802.11b wireless standard (also compatible with 802.11g wireless devices)
- *** Uses 2.4 GHz frequency band, which complies with worldwide requirement
- ---> Plug-and-Play operation and simple user setup with diagnostics utilities
- --- Allows users to move between Access Points (roaming) without reconfiguring the adapter
- ---- Supports Ad-Hoc (peer-to-peer) mode and Infrastructure mode network architecture
- --- Provides drivers support for Windows 98/ME/2000/XP
- --- Includes USB Type-A male-to-female extension cable
- --- Distance coverage 35 to 100 meters indoor, 100 to 300 meters outdoors
- --- 3-year warranty

BENEFITS

---> Integration Friendly:

Easy installation with plug-and-play and Hot-Swappable USB interface.

--- Economical:

With Wireless network, users can save time, labor, and material for network cable installation.

---> Flexible:

Creates wireless peer-to-peer network in Ad-Hoc mode or connects to Ethernet LAN in Infrastructure mode using Wireless Access Point.

--- Cost Effective:

Supports IEEE 802.11b wireless standard, user can connect to any IEEE 802.11b wireless network.

---> Performance:

Connects at a speed up to 11Mbps, wirelessly!

TEW-229UB 11Mbps Wireless USB Adapter

SPECIFICATIONS

Host Interface:

- USB Specification 1.0 and 1.1
- Type-A connector

Standards:

• IEEE 802.11b

Data Rate:

• 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps (auto-fallback)

Module Technique:

• IEEE 802.11b Direct Sequence Spread Spectrum (DSSS), CCK, DBPSK, DQPSK

Antenna:

• Integrated Micro-strip 2dBi Antenna

Media Access Protocol:

CSMA/CA with ACK

LED Indicator:

· Link status

Frequency:

• 2.400 to 2.497 GHz (Industrial Scientific Medical Band)

Output Power:

Minimum 13dBm (typical)

Receiving Sensitivity:

• -80 dBm @ 11Mbps, -87 dBm @ 2Mbps

Power Consumption:

- Transmit (TX): 450mA
- Receive (RX): 300mA

USB Cable:

• USB Type-A, male-to-female, 10cm (3.9 inches)

Channels:

• 11 Channels (US/Canada)

Dimensions:

• 76 x 25 x 11 mm (2.99 x 0.98 x 0.43 inch)

Weight:

• 14.2g (0.5 Oz.)

Temperature:

- Operating: 0° ~ 55° C (32° ~ 131°F)
- Storage: -25° ~ 70° C (-13° ~ 158°F)

• 10% ~ 95% (Non-condensing)

Certification:


FCC, CE







TWORKING

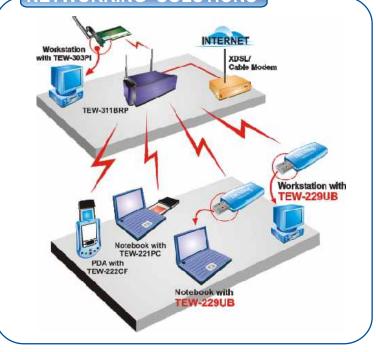

To Order Please Call: 1-888-326-6061

PRODUCT INFORMATION

- *** TEW-229UB: 11Mbps Wireless USB Network Adapter
- *** TEW-222CF: 11Mbps Wireless CompactFlash Network Adapter
- *** TEW-303PI: 22/11Mbps Wireless PCI Network Adapter
- *** TEW-310APB: 22/11Mbps Wireless Access Point with Bridge mode.
- *** TEW-311BRP: 22/11Mbps Wireless Broadband Router + Access Point

ORDERING INFORMATION

TRENDware International, Inc.

3135 Kashiwa Street Torrance, CA. 90505. USA Tel: 310-891-1100

Fax: 310-891-1111 Web: www.trendnet.com Email: sales@trendware.com

