



54Mbps Wireless G USB Adapter Kit TEW-424UBK (v3.0R)

TEW-424UB 802.11g Wireless USB 2.0 Adapter brings together the convenience of USB 2.0 and the high speed of 802.11g, allowing you to easily connect to 802.11g networks at speeds of up to 54Mbps. The USB 2.0 interface facilitates a hassle-free Plug-and-Play installation, and 128-bit WEP Encryption provides robust network security. The TEW-424UB is a feature-rich yet convenient way to go wireless.

FEATURES

- Wi-Fi Compliant with IEEE 802.11g and 802.11b Wireless Standards
- Uses 2.4 GHz Frequency Band, which Complies with Worldwide Requirements
- Supports Ad-Hoc (Peer-to-Peer) Mode or Infrastructure (AP-Client) Mode
- Compliant with Universal Serial Bus Rev 2.0, 1.1, 1.0 Specifications
- Dynamic Data Rate Scaling at 54, 48, 36, 24, 18, 12, 9 and 6Mbps for 802.11g
- Dynamic Data Rate Scaling at 11, 5.5, 2 and 1Mbps for 802.11b
- Maximum Reliability, Throughput and Connectivity with Automatic Data Rate Switching
- Compatible with Windows 98SE, ME, 2000, XP(32/64-bit), Vista (32/64-bit), Mac OS X 10.4/10.5
- Supports 64/128-bit WEP, WPA/WPA2 and WPA-PSK/WPA2-PSK
- Support WMM™ QoS (Wi-Fi Multimedia Quality of Service)
- Integrated Printed Antenna for the Multi-Path Environment
- Low Interference and High Susceptibility Guarantee Reliable Performance
- Low Power Consumption and Easy Configurations
- Range of 35~100 meters indoor, 100~300 meters outdoor (depends on the environment)
- Simple User Setup & Diagnostics Utilities
- 3-Year Limited Warranty


54Mbps Wireless G USB Adapter Kit

TEW-424UBK (V3.0R)

SPECIFICATIONS

Hardware	
Interface	• USB 2.0, 1.1, 1.0 Compliant
Standards	• IEEE 802.11b and IEEE 802.11g
Antenna	• 2dBi Integrated Printed Antenna
LED Indicator	• Link
Power Consumption	• Receive Mode: 280mA • Transmit Mode: 410 mA
Supported OS	• Windows 98SE, ME, 2000, XP(32/64-bit), Vista (32/64-bit), Mac OS X 10.4/10.5
Dimensions (LxWxH)	• 80 x 30 x 12 mm (3.1 x 1.2 x 0.5 inches)
Weight	• 15 g (0.5 oz.)
Temperature	• Operating: 0° ~ 40° C (32° ~ 104° F) • Storage: -10° ~ 70° C (14° ~ 158°F)
Humidity	• 10% ~ 95% max (Non-condensing)
Certification	• FCC, CE, ETS
Wireless	
Module Technique	• 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11g: OFDM
Frequency	• 2.412 to 2.484 GHz (Industrial Scientific Medical Band)
Media Access Protocol	• CSMA/CA with ACK
Data Rate (auto fallback)	• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps • 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps **6Mbps for 802.11g using USB 1.1 or 1.0 Connection
Output Power	• 18dBm (typically) @ 802.11b • 15dBm (typically) @ 802.11g
Receiving Sensitivity	• 54Mbps 10% PER @ -68 dBm (typical) • 11Mbps 8% PER @ -83 dBm (typical)
Security	• 64 128 bit WEP Hex ASCII) WPA PSK WPA2 PSK • WPA WPA2 W(indows 2000 /XP only)
Channels	• 1~11 channel (FCC), 1~13 channel (ETSI)

NETWORKING SOLUTIONS

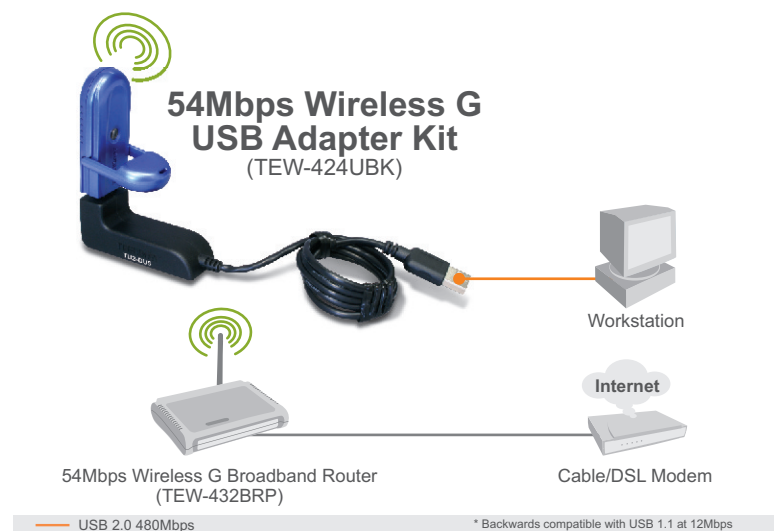

PACKAGE CONTENTS

- TEW-424UBK
- Quick Installation Guide
- Utility & Driver CD-ROM
- TU2-DU5

RELATED PRODUCTS

TEW-421PC	54Mbps 802.11g Wireless PC Card
TEW-423PI	54Mbps 802.11g Wireless PCI Network Adapter

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA
 Tel: 1-310-961-5500
 Fax: 1-310-961-5511
 Web: www.trendnet.com
 Email: sales@trendnet.com

To Order Please Call:
1-888-326-6061

