# 



TEW-631BRP rev:08.01.2007



## **300Mbps Wireless N Firewall Router** TEW-631BRP (V2.0)

The 300Mbps Wireless N-Draft Router incorporates the latest wireless networking technology to increase speed, range and reliability of your wireless network. Advanced antenna technology increases wireless data coverage throughout homes and businesses. Increased speed and throughput makes it the perfect solution to fulfill your multimedia needs.

## FEATURES

- Wi-Fi Compliant with IEEE 802.11n and IEEEE 802.11b/g Standards
  - 4 x 10/100Mbps Auto-MDIX LAN Port and 1 x 10/100Mbps WAN Port (Internet)
  - Supports Cable/DSL Modems with Dynamic IP, Static IP, PPPoE, PPTP and L2TP Connection Types
  - High-Speed up to 300Mbps Data Rate using IEEE 802.11n connection
  - Built-in 3 External Antennas supporting high speed performance and great coverage
  - Firewall features Network Address Translation (NAT), and Stateful Packet Inspection (SPI) protects against Dos attacks
  - Traffic Control with Virtual Server (max 64 configurable servers), special applications, Gaming types & Ubicom StreamEngine™ Feature
  - UPnP (Universal Plug & Play) and ALGs Support for Internet applications such as Email, FTP, Gaming, Remote Desktop, Net Meeting, Telnet, and more
  - Stream Engine Technology by Ubicom<sup>™</sup> provides QoS traffic prioritization of online games, VoIP calls, and streaming video to reduce lag time and jitter
  - UPnP (Universal Plug & Play) and ALGs Support for Internet applications such as Email, FTP, Gaming, Remote Desktop, Net Meeting, Telnet, and more
  - Provides Additional Security of Enable/Disable SSID, Access Control, Web & Inbound traffic filters
  - Supports Multiple and Concurrent IPSec, L2TP and PPTP VPN Pass-Through Sessions
  - · Flash Memory for Firmware Upgrade, Save/Restore Settings
  - Easy Management via Web Browser (HTTP) and Remote Management
  - Supports 64/128-bit WEP, WPA/WPA2 and WPA-PSK/WPA2-PSK
  - Compliant with Windows 95/98/NT/2000/XP/2003 Server/Vista, Linux and Mac OS
  - · Coverage up to 150 meters (500ft.) Indoor(depends on the environment)
  - · Coverage up to 400 meters (1300ft.) Outdoor(depends on the environment)
  - 3-Year Warranty


#### SPECIFICATIONS

Hardware	
Standards	<ul> <li>Wired: IEEE 802.3 (10Base-T), IEEE 802.3u (100Base-TX)</li> </ul>
	• Wireless: IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (draft 2.0)
WAN	1 x 10/100Mbps Auto-MDIX Port (Internet)
LAN	4 x 10/100Mbps Auto-MDIX Port
Slide Switch	Turn On/Off Wireless LAN
Config Button	Reserved for WPS function use
Connection Type	Dynamic IP, Static (Fixed) IP, PPPoE, PPTP, L2TP
NAT Firewall	<ul> <li>4K ~ 16K Configurable NAT entries; Restricted NAPT</li> </ul>
	IP Ranges, Port Ranges & Schedule
	Pre-Defined Game Hosting Configurations
	Port Triggering for 64 Special Applications
	<ul> <li>ALG Support – RTP/RTSP, AOL, FTP, ICMP, WMP/MMS, NetMeeting, SIP</li> </ul>
	ALG Enable/Disable
0015	UP to 64 Rules
SPI Firewall	Cyber Attack Protection – Verified Against Over 2000 Attacks
Multicast Stream	Enable/Disable control support
UPnP	UPnP IGD Compliant
DMZ	DMZ Host, 64 Configurable Virtual Servers & Game Servers
DNC	Static or WAN assigned DNS Servers
DNS	8 verified services for DDNS
Internet Access Control	Policy Based Parental Controls, Time Based Internet Access, Port Range/Service Filtering, URL Filtering, Inbound Filter, 20 User Defined Schedules, 20 MAC Address Filter Entries
LED Indicator	Power, LAN1~LAN4, WAN, WLAN
Power Adapter	12V DC, 1A External Power Adapter
Power Consumption	• 6W @ 12VDC
Dimensions (LxWxH)	• 180 x 122 x 30 mm (6.8 x 4.6 x 1.1 inches)
Weight	• 350g (0.8 lb)
Temperature	<ul> <li>Operating: 0° ~ 40° C (32° ~ 104° F)</li> </ul>
	<ul> <li>Storage: -20° ~ 60° C (-4° ~ 140° F)</li> </ul>
Humidity	Max. 90% (Non-Condensing)
Emissions	• CE, FCC

#### SPECIFICATIONS

Wireless	Wireless		
Frequency	• 2.412 ~ 2.462 GHz (FCC)		
	• 2.412 ~ 2.472 GHz (ETSI)		
Antenna	3 x 4dBi Fixed Dipole Antenna		
Media Access Protocol	CSMA/CA with ACK		
Data Rate (auto fallback)	• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps		
	<ul> <li>802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps</li> </ul>		
	• 802.11n (draft) : up to 300Mbps		
Security	<ul> <li>Encryption: Hardware AES/TKIP, 64/128-bit WEP (Hex/Passpharse, for 11b/g)</li> </ul>		
	<ul> <li>WPA: WPA/WPA2(EAP/802.1x), WPA-PSK/WPA2-PSK (AES: 11b/g/n, TKIP: 11b/g)</li> </ul>		
	SSID Broadcast Con		
Output Power	• 802.11b: 18dBm (typical)		
	• 802.11g: 15dBm (typical)		
	• 802.11n (draft) : 14dBm (typical) with HT20 & HT40		
Receiving Sensitivity	• 802.11b: -84dBm (typical) @ 11Mbps		
	• 802.11g: -72dBm (typical) @ 54Mbps		
	• 802.11n (draft) : -70dBm (typical) with HT40		
Channels	• 1~11 (US), 1~13 (EU)		

## NETWORKING SOLUTIONS

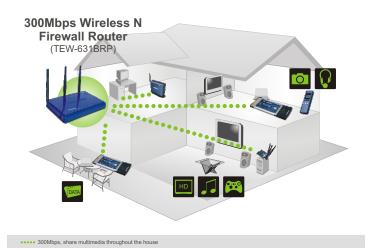

## PACKAGE CONTENTS

• TEW-631BRP		
Multi-Language Quick Installation Guide		
Easy-Go installation CD-ROM		
• Power Adapter (12V DC, 1A)		
• RJ-45 Cable (1.5m)		

## **RELATED PRODUCTS**

TEW-621PC	300Mbps Wireless N-Draft PC Card
TEW-623PI	300Mbps Wireless N-Draft PCI Adapter
TEW-630APB	300Mbps Wireless N-Draft Access Point

#### ORDERING INFORMATION

#### TRENDNET

20675 Manhattan Place,Torrance, CA 90501 USA Tel: 1-310-961-5500 Fax: 1-310-961-5511 Web: <u>www.trendnet.com</u> Email: sales@trendnet.com

To Order Please Call: 1-888-326-6061



TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit <u>http://www.trendnet.com</u>.