









300Mbps Wireless Easy-N-Upgrader TEW-637AP [V2.0R]

The 300Mbps Wireless Easy-N-Upgrader[™] upgrades your old, perfectly functioning router, to high speed wireless n. Enjoy up to 12 times the speed and 6 times the coverage of a wireless g network

Eliminate wireless dead spots, seamlessly surf the Internet and help the environment by not throwing away your old router.

The compact 300Mbps Wireless Easy-N-Upgrader[™] is designed around ease of use, performance and environmental friendliness. The latest in wireless encryption ensures wireless security. Advanced Multiple Input Multiple Output (MIMO) antenna technology eliminates wireless dead spots. Wireless Protected Setup (WPS) lets you integrate other WPS devices into your network quickly.

- FEATURES A smaller and faster access point solution suitable for upgrading to wireless N
 - Affordable wireless N device for easily migrating from wireless G and B networks
 - Compatible with the 2.4GHz frequency work off of a single-band design
 - Supports Wireless Distribution System (WDS) to extend wireless network
 - Improves the data transfer speed by working with existing wireless G and B Networks
 - Compliant with IEEE 802.11n (draft) standard, IEEE 802.11g, & 802.11b standards
 - Universal wireless connectivity for seamless roaming between any 802.11-base network
 - Up to 300Mbps data rate using 802.11n (draft) connection
 - Support for 802.11e enhancements for wireless applications
 - Wireless security support for WEP, WPA & WPA2
 - Low Interference and high susceptibility guarantee reliable performance
 - Supports WiFi Protected Setup (WPS) feature
 - Supports Windows 95/98/NT/2000/XP/2003 server/Vista, Linux and Mac OS
 - 2 antennas to support high speed performance and great coverage
 - 3 year limited warranty


^{*}Maximum wireless signal rates are referenced from IEEE 802.11 theoretical specifications. Actual data throughput and coverage will vary depending on interference, network traffic, building materials and other conditions.

300Mbps Wireless Easy-N-Upgrader TEW-637AP

SPECIFICATIONS

Hardware	
Standards	IEEE 802.11n (draft 2.0), IEEE 802.11b, IEEE 802.11g. and 802.11e
Interface	1 x 10/100Mbps Auto-MDIX LAN port
LED Indicators	Power, Link, WPS and Wireless
Power Supply	12V DC 0.5A external power adapter
Dimensions (LxWxH)	• 120 x 26 x 88 mm (4.7 x 1.0 x 3.4 inches)
Weight	• 145 g (5.11oz)
Temperature	 Operating: 0° to 40° C (32° ~ 104° F), Storage: -20° ~ 60°C (-4°~140°F)
Humidity	Operating: 10% ~ 85% Non-Condensing Storage: 5% ~ 90% Non-Condensing
Wireless	
Module Technique	802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps)
	802.11g: OFDM with BPSK, QPSK and 16/64-QAM 802.11n: OFDM with BPSK, QPSK and 16/64-QAM
WDS	Enable/Disable Wireless Distribution System support
Antenna	2 x 2dBi external fixed dipole antennas
Frequency	• 2.412 - 2.462 GHz (FCC) • 2.412 - 2.472 GHz (ETSI)
Media Access Protocol	• IEEE 802.11
Data Rate (auto fallback)	802.11n: up to 300Mbps 802.11b: 11Mbps, 5.5Mbps, 2Mbps, 1 Mbps
	802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps, 6 Mbps
Output Power	802.11n : 11dBm (typical) @MCS 15/HT40
Receiving Sensitivity	802.11n: -68dBm (typical) @ MCS15/HT20, -66dBm @ MCS15/HT40
	802.11b: -84dBm (typical) @ 11Mpbs
Encryption	64/128-bit WEP (Hex & ASCII), WPA/WPA2 Radius, Radius, WPA/WPA2-PSK Encryption
Channels	• 1-11 (FCC) 1-13 (ETSI)

NETWORKING SOLUTIONS

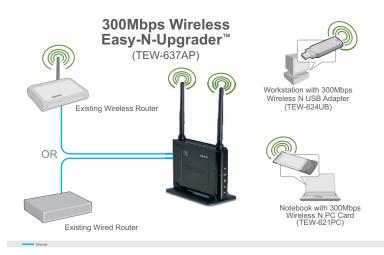

RELATED PRODUCTS

- TEW-637AP
- Multi-Language Quick Installation Guide
- CD-ROM (Utility and User's Guide)
- One Cat5 cable (0.6m 2 ft.)
- Power adapter (12V DC, 0.5A)

RELATED PRODUCTS

TEW-621PC	300Mbps Wireless N PC Card
TEW-623PI	300Mbps Wireless N PCI Adapter
TEW-624UB	300Mbps Wireless N USB Adapter

ORDERING INFORMATION

TRENDNET

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500 Fax: 1-310-961-5511 Web: <u>www.trendnet.com</u> Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

