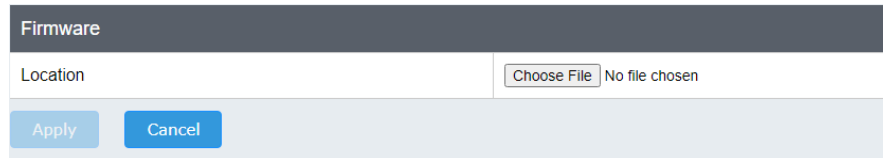


Firmware Upgrade Procedure

Upgrade through user interface

1. Log into the router's configuration page (default IP is 192.168.10.100 or <http://tew-823dap>)
2. Click on the **Management** and click on **Upload Firmware**.
3. Depending on your web browser, in the **Upload Firmware** section, click **Browse** or **Choose File**.

A screenshot of a web interface for uploading firmware. It features a dark grey header bar with the word "Firmware" in white. Below the header is a light grey form area. On the left, there is a text input field labeled "Location". To the right of this field is a button labeled "Choose File" and the text "No file chosen". At the bottom of the form area, there are two buttons: "Apply" and "Cancel".

Firmware	
Location	<input type="button" value="Choose File"/> No file chosen
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

4. Navigate to the folder on your computer where the unzipped firmware file (*.bin*) is located and select it.
5. Click **Apply**. If prompted, click **Yes** or **OK**. Wait until the firmware upload completed and the device reboots.